

# Outdoor LoRaWAN Gateway

## User Manual

USR-LG280



V2.0

**Be Honest & Do Best**

Your Trustworthy Smart Industrial IoT Partner

## Content

1. Introduction .....	- 5 -
1.1. Features .....	- 5 -
1.2. Parameters table .....	- 6 -
1.3. Dimension .....	- 8 -
2. Get Started .....	- 8 -
2.1. Login router .....	- 8 -
2.2. Brief view of the webpage .....	- 9 -
3. Status .....	- 9 -
3.1. Overview .....	- 9 -
3.2. Cellular .....	- 10 -
3.3. Network .....	- 12 -
3.4. WLAN .....	- 12 -
3.5. VPN .....	- 14 -
3.6. Host List .....	- 14 -
4. LoraWAN .....	- 15 -
4.1. Packet Forwarder .....	- 15 -
4.1.1. General .....	- 15 -
4.1.2. Radios .....	- 17 -
4.1.3. Noise Analyzer .....	- 18 -
4.1.4. Advanced .....	- 19 -
4.1.5. Custom .....	- 22 -
4.1.6. Traffic .....	- 22 -
4.2. Network Server .....	- 23 -
4.2.1. General .....	- 23 -
4.2.2. Application .....	- 25 -
4.2.3. Payload Codec .....	- 28 -
4.2.4. Profiles .....	- 31 -
4.2.5. Device .....	- 33 -
4.2.6. Multicast Groups .....	- 35 -
4.2.7. Gateway Fleet .....	- 37 -
4.2.8. Packets .....	- 38 -

4.3. Protocol Integration .....	- 41 -
4.3.1. BACnet Server .....	- 41 -
4.3.2. Interface .....	- 44 -
4.3.3. Firewall .....	- 53 -
4.3.4. DHCP .....	- 58 -
4.3.5. DDNS .....	- 59 -
4.3.6. Link Failover .....	- 60 -
4.3.7. VPN .....	- 63 -
4.4. System .....	- 78 -
4.4.1. General Settings .....	- 79 -
4.4.2. User Management .....	- 82 -
4.4.3. SNMP .....	- 84 -
4.4.4. Device Management .....	- 87 -
4.4.5. Events .....	- 89 -
4.5. Maintenance .....	- 91 -
4.5.1. Tools .....	- 91 -
4.5.2. Schedule .....	- 92 -
4.5.3. Log .....	- 93 -
4.5.4. Backup and Restore .....	- 95 -
3.6.6 Reboot .....	- 96 -
4.6. APP .....	- 96 -
4.6.1. Python .....	- 96 -
3.7.2 Node-RED .....	- 99 -
Chapter 4 Application Examples .....	- 101 -
4.1 Restore Factory Defaults .....	- 101 -
4.2 Firmware Upgrade .....	- 102 -
4.3 Ethernet Connection .....	- 102 -
4.4 Cellular Connection (Cellular Version Only) .....	- 103 -
4.5 Wi-Fi Application Example .....	- 105 -
4.5.1 AP Mode .....	- 105 -
4.5.2 Client Mode .....	- 106 -
4.6 Packet Forwarder Configuration .....	- 107 -

4.7 Connect to IoT Cloud .....	- 109 -
4.8 Application Configuration .....	- 111 -
4.9 Device Configuration .....	- 113 -
4.10 Send Data to Device .....	- 114 -
4.11 Node-RED .....	- 117 -
4.11.1 Start the Node-RED .....	- 117 -
4.11.2 Send Data by Email .....	- 117 -
5. Contact Us .....	- 120 -
6. Disclaimer .....	- 120 -

# 1. Introduction

USR-LG280 is a robust 8-channel outdoor LoRaWAN® gateway. Adopting SX1302 LoRa chip and high-performance quad-core CPU, LG280 supports connection with more than 2000 nodes. LG280 has line of sight up to 15 km and can cover about 2km in urbanized environment, which is ideally suited to smart office, smart building and many other outdoor applications.

LG280 supports not only multiple back-haul backups with Ethernet, Wi-Fi and cellular, but also has integrated mainstream network servers (such as The Things Industries, ChirpStack, etc.) and built-in network server for easy deployment.

## 1.1. Features

### Benefits

- Built-in industrial CPU and big memory
- Ethernet, 2.4GHz Wi-Fi and global 2G/3G/LTE options make it easy to get connected
- Embedded network server and compliant with several third party network servers
- MQTT(s) or HTTP(s) protocol for data transmission to application server
- Rugged enclosure, optimized for wall or pole mounting

### Security & Reliability

- Automated failover/failback between Ethernet and Cellular
- Enable unit with security frameworks like IPsec/OpenVPN/GRE/L2TP/PPTP/ DMVPN
- Embedded hardware watchdog to automatically recover from various failure and ensure highest level of availability

### Easy Maintenance

- DeviceHub provides easy setup, mass configuration, and centralized management of remote devices
- The user-friendly web interface design and various upgrading options help administrator to manage the device as easy as pie
- WEB GUI and CLI enable the admin to achieve quick configuration and simple management among a large quantity of devices
- Users can efficiently manage the remote devices on the existing platform through the industrial standard SNMP

### Capabilities

- Link remote devices in an environment where communication technologies are constantly changing
- Industrial quad core 64-bit ARM Cortex-A53 processor, high-performance operating up to 1.5GHz with low power consumption, and 8GB eMMC available to support more applications
- Support wide operating temperature ranging from -40°C to 70°C

## 1.2. Parameters table

**Table 1. Parameters of USR-LG280**

Items	Description	
Processor	Quad-core 1.5GHz, 64-bit ARM Cortex-A53	
Power Supply	1 × 802.3 af PoE Input, 12 VDC with M12 Connector	
Working Current	Typical 3.6W, Max 4.8W	
LoRaWAN		
Radio Chip	SX1302	
Frequency	<b>AU915:</b> (902-928M)  FDD:B1/B2/B3/B4/B5/B7/B8/B28  TDD:B40  WCDMA:B1/B2/B4/B5/B8  GSM/EDGE:B2/B3/B5/B8	<b>EU868:</b> (868-873MHz)  FDD: B1/B3/B7/B8/B20/B28A  TDD: B38/B40/B41  WCDMA:B1/B8  GSM/EDGE:B3/B8
Tx Power	27dBm Max	
Rx Sensitivity	‘-140dBm @292bps	
Protocol	V1.0 Class A/Class B/Class C and V1.0.2 Class A/Class B/Class C	
Antenna	2 × 50 Ω N-Female External Connectors, fiber antenna	
Ethernet		
Ports	1*10/100/1000Mbps RJ45(PoE PD supported), auto MDI/MDIX, full or half duplex (auto-sensing)	
WiFi		

Standard	IEEE 802.11 b/g/n, 2.4 GHz
Antenna	Fully Integrated and Internal Antenna
Tx Power	802.11b: 18 dBm +/-2.0 dBm (11 Mbps) 802.11g: 15 dBm +/-2.0 dBm (6 Mbps) 802.11g: 15 dBm +/-2.0 dBm (54 Mbps) 802.11n@2.4 GHz: 14 dBm +/-2.0 dBm (MCS0_HT20) 802.11n@2.4 GHz: 14 dBm +/-2.0 dBm (MCS7_HT20) 802.11n@2.4 GHz: 13 dBm +/-2.0 dBm (MCS0_HT40) 802.11n@2.4 GHz: 13 dBm +/-2.0 dBm (MCS7_HT40)
Cellular	
Antenna	Internal Antenna
SIM Slot	1*mini-SIM(2FF)
GPS	
Antenna	Internal Antenna
Sensitivity	-167dBm@Tracking, -149dBm@Acquisition, -161dBm@Re-acquisition
Position Accuracy	<2.5m CEP
Physical Property	
Casing material	PC+Aluminium ADC12, IP67 protection
Dimensions	240 x 164 x 90.9 mm
Weight	1671.7g
Installation	Wall or Pole Mounting
Operating temperature	-40°C to +70°C
Storage temperature	-40°C to +85°C
Operating humidity	0% to 95% (non-condensing)
Software Function	
Network Protocols	PPPoE, SNMP v1/v2c/v3, TCP, UDP, DHCP, DDNS, HTTP, HTTPS, DNS, SNTP, Telnet, SSH, MQTT, MQTTS, BACnet/IP, etc.
VPN Tunnel	DMVPN/IPsec/OpenVPN/PPTP/L2TP/GRE
Firewall	ACL/DMZ/Port Mapping/MAC Binding
Management	Web, CLI, SMS, On-demand dial up, DeviceHub
APPROVALS	

Regulatory	RCM
------------	-----

## 1.3. Dimension

Unit: mm

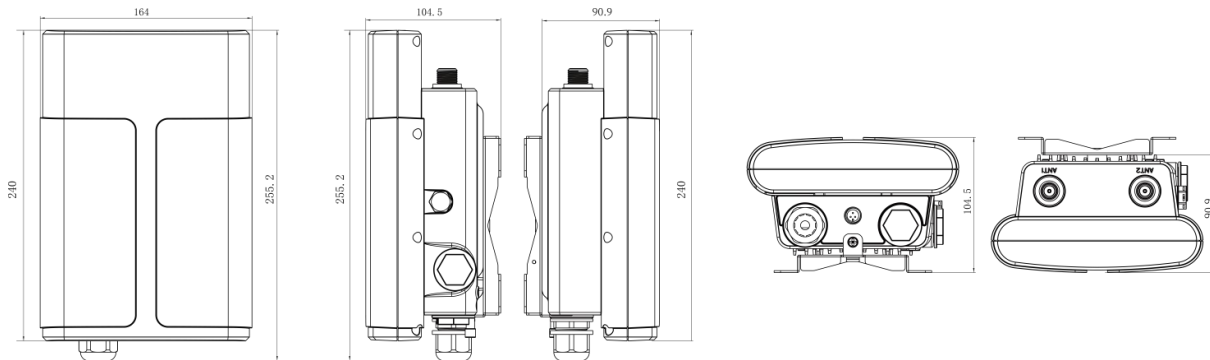


Figure 1. Dimension of USR-LG280

## 2. Get Started

### 2.1. Login router

Power on the LoRaWAN gateway, connect PC to LG280 via LAN port or via Wi-Fi, users can login router via Chrome or the other browser. The default network parameters are shown in the following table:

Table 2. Default network parameters

Parameter	Default value
SSID	Gateway-xxxxxx
LAN IP	192.168.10.1
Username	admin
Password	password
Wi-Fi password	<a href="#">iotpassword</a>

Open the browser, enter 192.168.10.1 in the URL blank, and press Enter, it will navigate to the following webpage. After entering the login password, clicking login, the web page will show configuration page of USR-LG280.



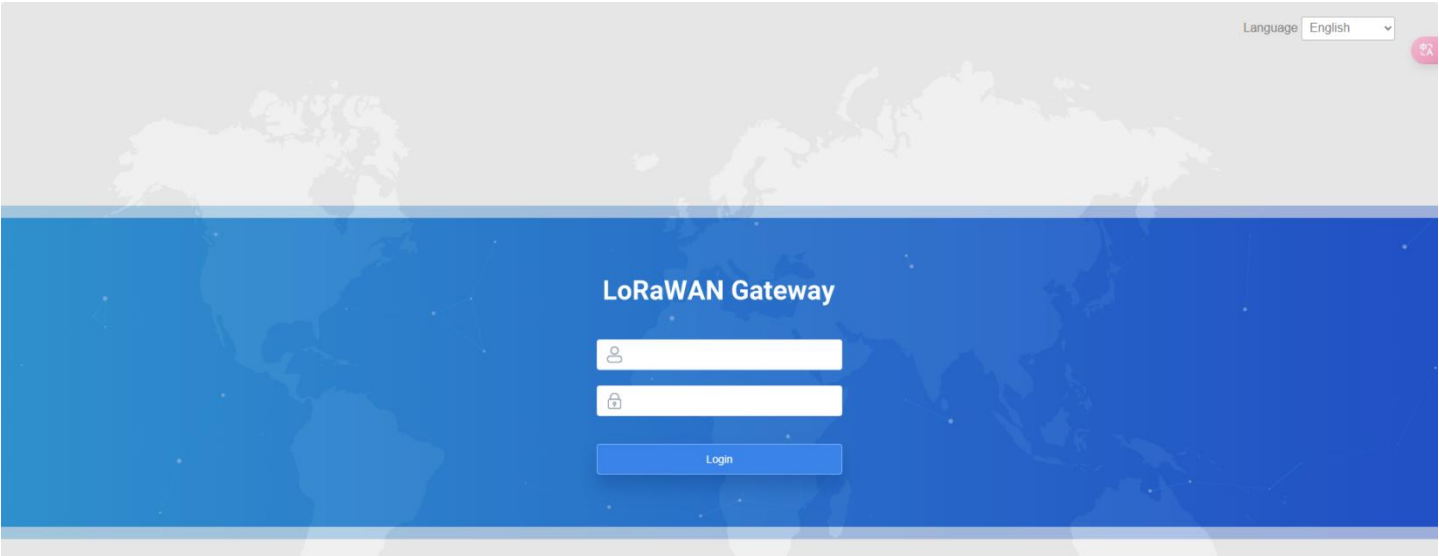


Figure 2. Login webpage

**Note:** If you enter the username or password incorrectly more than 5 times, the login page will be locked for 10 minutes.

2.2. Brief view of the webpage

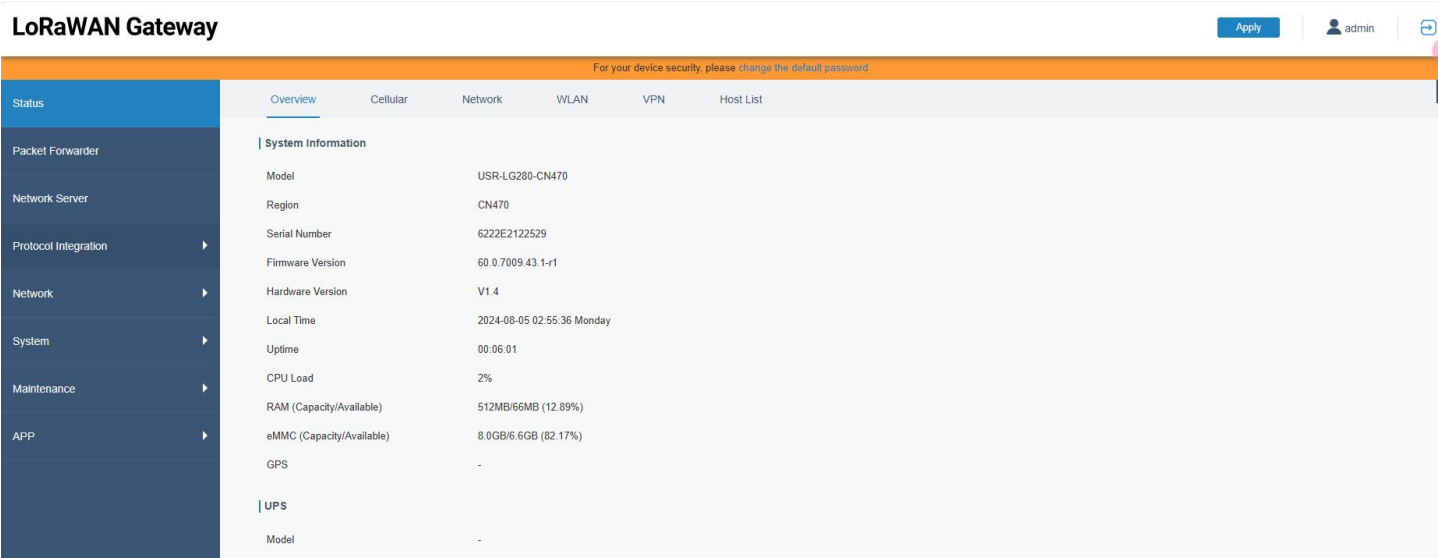


Figure 3. Status webpage

3. Status

3.1. Overview

You can view the system information of the gateway on this page.

## LoRaWAN Gateway

For your device security, please change the default password

**Status**  
 Packet Forwarder  
 Network Server  
 Protocol Integration  
 Network  
 System  
 Maintenance  
 APP

**Overview** Cellular Network WLAN VPN Host List  
 System Information  
 Model USR-LG280-CN470  
 Region CN470  
 Serial Number 6222E2122529  
 Firmware Version 60.0.7009.43.1-r1  
 Hardware Version V1.4  
 Local Time 2024-08-05 02:55:36 Monday  
 Uptime 00:06:01  
 CPU Load 2%  
 RAM (Capacity/Available) 512MB/66MB (12.89%)  
 eMMC (Capacity/Available) 8.0GB/6.6GB (82.17%)  
 GPS -  
 UPS  
 Model -  
 Serial Number

Item	Description
Model	Show the model name of gateway.
Region	Show the LoRaWAN® frequency region of gateway.
Serial Number	Show the serial number of gateway.
Firmware Version	Show the currently firmware version of gateway.
Hardware Version	Show the currently hardware version of gateway.
Local Time	Show the currently local time of system.
Uptime	Show the information on how long the gateway has been running.
CPU Load	Show the current CPU utilization of the gateway.
RAM (Capacity/Available)	Show the RAM capacity and the available RAM memory.
eMMC (Capacity/Available)	Show the eMMC capacity and the available eMMC memory.
GPS	Show GPS data of the gateway.

### 3.2. Cellular

You can view the cellular network status of gateway on this page.

## LoRaWAN Gateway

For your device security, please change the default password	
Status	Overview Cellular Network WLAN VPN Host List
Packet Forwarder	Modem
Network Server	Status No SIM Card
Protocol Integration	Model EC20F
Network	Version EC20CEFHLGR08A01M1G
System	Signal Level no enough signa 99asu
Maintenance	Register Status Not registered
APP	IMEI 863812071492239
	IMSI
	ICCID
	ISP
	Network Type
	PLMN ID
	LAC
	Cell ID

Item	Description
Status	Show corresponding detection status of module and SIM card.
Model	Show the model name of cellular module.
Version	Show the version of cellular module.
Signal Level	Show the cellular signal level.
Register Status	Show the registration status of SIM card.
IMEI	Show the IMEI of the module.
IMSI	Show IMSI of the SIM card.
ICCID	Show ICCID of the SIM card.
ISP	Show the network provider which the SIM card registers on.
Network Type	Show the connected network type, such as LTE, 3G, etc.
PLMN ID	Show the current PLMN ID, including MCC, MNC, LAC and Cell ID.
LAC	Show the location area code of the SIM card.
Cell ID	Show the Cell ID of the SIM card location.

Network	
Status	Disconnected
IP Address	0.0.0.0
Netmask	0.0.0.0
Gateway	0.0.0.0
DNS	0.0.0.0
Connection Duration	0 days, 00:00:00

Item	Description
------	-------------

Status	Show the connection status of cellular network.
IP Address	Show the IP address of cellular network.
Netmask	Show the netmask of cellular network.
Gateway	Show the gateway of cellular network.
DNS	Show the DNS of cellular network.
Connection Duration	Show information on how long the cellular network has been connected.

### 3.3. Network

On this page you can check the Ethernet port status of the gateway.

<

Item	Description
Port	Show the name of the Ethernet port.
Status	Show the status of the Ethernet port. "Up" refers to a status that WAN is enabled and Ethernet cable is connected. "Down" means Ethernet cable is disconnected or WAN function is disabled.
Type	Show the dial-up type of the Ethernet port.
IP Address	Show the IP address of the Ethernet port.
Netmask	Show the netmask of the Ethernet port.
Gateway	Show the gateway of the Ethernet port.
DNS	Show the DNS of the Ethernet port.
Duration	Show the information about how long the Ethernet cable has been connected to the Ethernet port when the port is enabled. Once the port is disabled or Ethernet cable is disconnected, the duration will stop.

### 3.4. WLAN

You can check Wi-Fi status on this page, including the information of access point and client.

Overview	Cellular	Network	WLAN	VPN	Host List
<b>WLAN Status</b>					
Wireless Status	Enabled				
MAC Address	24:e1:24:f0:e2:26				
Interface Type	AP				
SSID	Gateway_F0E226				
Channel	Auto				
Encryption Type	No Encryption				
Status	Up				
IP Address	192.168.1.1				
Netmask	255.255.255.0				
Connection Duration	4 days, 21:12:11				

Item	Description
Wireless Status	Show the wireless status.
MAC Address	Show the MAC address.
Interface Type	Show the interface type, such as "AP" or "Client".
SSID	Show the SSID.
Channel	Show the wireless channel.
Encryption Type	Show the encryption type.
Status	Show the connection status.
IP Address	Show the IP address of the gateway.
Netmask	Show the wireless MAC address of the gateway.
Gateway	Show the gateway address in wireless network.
Connection Duration	Show information on how long the Wi-Fi network has been connected.

#### Associated Stations

IP Address	MAC Address	Connection Duration
Item	Description	
IP Address	Show the IP address of access point or client.	
MAC Address	Show the MAC address of the access point or client.	
Connection Duration	Show information on how long the Wi-Fi network has been connected.	

### 3.5. VPN

You can check VPN status on this page, including PPTP, L2TP, IPsec, OpenVPN and DMVPN.

Overview

Cellular

Network

WLAN

VPN

Host List

PPTP Tunnel

Name	Status	Local IP	Remote IP
pptp_1	Disconnected	-	-
pptp_2	Disconnected	-	-
pptp_3	Disconnected	-	-

L2TP Tunnel

Name	Status	Local IP	Remote IP
l2tp_1	Disconnected	-	-
l2tp_2	Disconnected	-	-
l2tp_3	Disconnected	-	-

Item	Description
Name	Show the name of the VPN tunnel.
Status	Show the status of the VPN tunnel.
Local IP	Show the local tunnel IP of VPN tunnel.
Remote IP	Show the remote tunnel IP of VPN tunnel.

### 3.6. Host List

You can view the host information on this page.

Overview

Cellular

Network

WLAN

VPN

Host List

DHCP Leases

IP	MAC	Lease Remaining Time
----	-----	----------------------

MAC Binding

IP	MAC
----	-----

Item	Description
DHCP Leases	
IP Address	Show IP address of DHCP client
MAC Address	Show MAC address of DHCP client
Lease Time Remaining	Show the remaining lease time of DHCP client.
MAC Binding	
IP & MAC	Show the IP address and MAC address set in the Static IP

	list of DHCP service.
--	-----------------------

## 4. LoraWAN

### 4.1. Packet Forwarder

#### 4.1.1. General

**General Setting**

Gateway EUI: 24E124FFFEF35F39

Gateway ID: 24E124FFFEF35F39

Frequency-Sync: Disabled


Data Retransmission: ☐

**Multi-Destination**

ID	Enable	Type	Server Address	Connect Status	Operation
0	Enabled	Embedded NS	localhost	Disconnected	


Item	Description
Gateway EUI	Show the unique identifier of the gateway and it's non-editable.
Gateway ID	Fill in the corresponding ID which you've used for registering the gateway to the remote network server. It is usually the same as gateway EUI and can be changed.
Frequency-Sync	Sync frequency configurations from the network server by selecting the corresponding multi-destination ID.
Data Retransmission	When the gateway connects to a single Chirpstack/Semtech/Remote Embedded NS/Basic Station type package forwarder, it supports data storage of up to 1 million pieces of data when the network is disconnected and re-transmits the data after network recovery.
Multi-Destination	The gateway will forward the data to the network server address that was created and enabled in the list.
Connection Status	Show the connection status of the package forwarder.

**| Packet Filters**


Filters by NetID default mode **White List** 

Proprietary Message Filter ☒


Filters by NetID 

White List 


  




Filters by JoinEUI 

Black List 


  

To  

Filters by DevEUI 

White List 

To  

Parameters	Description
Filters by NetID Default Mode	Select the filter mode as black list or white list. White List: Only forward the packets on this list to the network server. Black List: Only forward the packets except this list to the network server.
Filters by NetID	Forward/Not forward the uplink packets that match the NetID.
Filters by JoinEUI	Forward/Not forward the join request packets that match the JoinEUI range.
Filters by DevEUI	Forward/Not forward the join request packets that match the DevEUI range.
List	Set the specific filtering value or range list. Every condition supports to add 5 lists at most.

**Note:**

1. When join EUI and dev EUI are both configured, only packets that match both conditions will be forwarded.
2. This feature is not supported when the packet forwarder type is Lorient or Everynet.
3. When a third-party network server assigns filter condition to gateway, the gateway will use network server settings in priority.

**Related Configuration Example**

[Packet forwarder configuration](#)



## 4.1.2. Radios

**Radio Channel Setting**

Region US915 Noise Analyzer

Name	Center Frequency/MHz
Radio 0	904.3
Radio 1	905.1

Item	Description	Default
Region	Choose the LoRaWAN® frequency plan used for the upstream and downlink frequencies and datarates. Available channel plans depend on the gateway's model.	Based on the gateway's model
Center Frequency	Change the frequencies to receive packets from LoRaWAN® nodes.	Based on what is specified in the LoRaWAN® regional parameters document

**Multi Channels Setting**

Enable	Index	Radio	Frequency/MHz
<input checked="" type="checkbox"/>	0	Radio 0	923.2
<input checked="" type="checkbox"/>	1	Radio 0	923.4
<input checked="" type="checkbox"/>	2	Radio 0	923.6
<input checked="" type="checkbox"/>	3	Radio 1	922.2
<input checked="" type="checkbox"/>	4	Radio 1	922.4
<input checked="" type="checkbox"/>	5	Radio 1	922.6
<input checked="" type="checkbox"/>	6	Radio 1	922.8
<input checked="" type="checkbox"/>	7	Radio 1	923.0

Item	Description	Default
Enable	Click to enable this channel to transmit packets.	Enabled
Index	Indicate the ordinal of the list.	/
Radio	Choose Radio 0 or Radio 1 as center frequency.	Radio 0
Frequency/MHz	Enter the frequency of this channel. Range: center frequency $\pm$ 0.4625.	Based on the LoRaWAN® regional document

**LoRa Channel Setting**

Enable	Radio	Frequency/MHz	Bandwidth/KHz	Spread Factor
<input checked="" type="checkbox"/>	Radio 0	923.8	250KHZ	SF7

Item	Description	Default
------	-------------	---------

Enable	Click to enable this channel to transmit packets.	Enabled
Radio	Choose Radio 0 or Radio 1 as center frequency.	Radio 0
Frequency/MHz	Enter the frequency of this channel. Range: center frequency $\pm$ 0.9.	Based on the supported frequency
Bandwidth/MHz	Enter the bandwidth of this channel.	500KHz
Spread Factor	Choose the selectable spreading factor. The channel with large spreading factor corresponds to a low rate, while the small one corresponds to a high rate.	Based on what is specified in the LoRaWAN® regional parameters document

FSK Channel Setting


Enable	Radio	Frequency/MHz	Bandwidth/KHz	DataRate
<input checked="" type="checkbox"/>	Radio 0	924.0	125KHz	50000

Item	Description	Default
Enable	Click to enable this channel to transmit packets.	Disabled
Radio	Choose Radio 0 or Radio 1 as center frequency.	Radio 0
Frequency/MHz	Enter the frequency of this channel. Range: center frequency $\pm$ 0.9.	Based on the supported frequency
Bandwidth/MHz	Enter the bandwidth of this channel. Recommended value: 125KHz, 250KHz, 500KHz	Based on the supported frequency
Data Rate	Enter the data rate. Range: 500-25000.	500

### 4.1.3. Noise Analyzer

Noise analyzer is used for scanning the noise of every frequency channel and giving a diagram for users to analyze the environment interference condition and select best deployment. RSSI indicates the sensitivity for every channel.

Lower the RSSI value, better the signal. It's not suggested to enable this feature when using package forwarder since it will affect the downlink transmission.

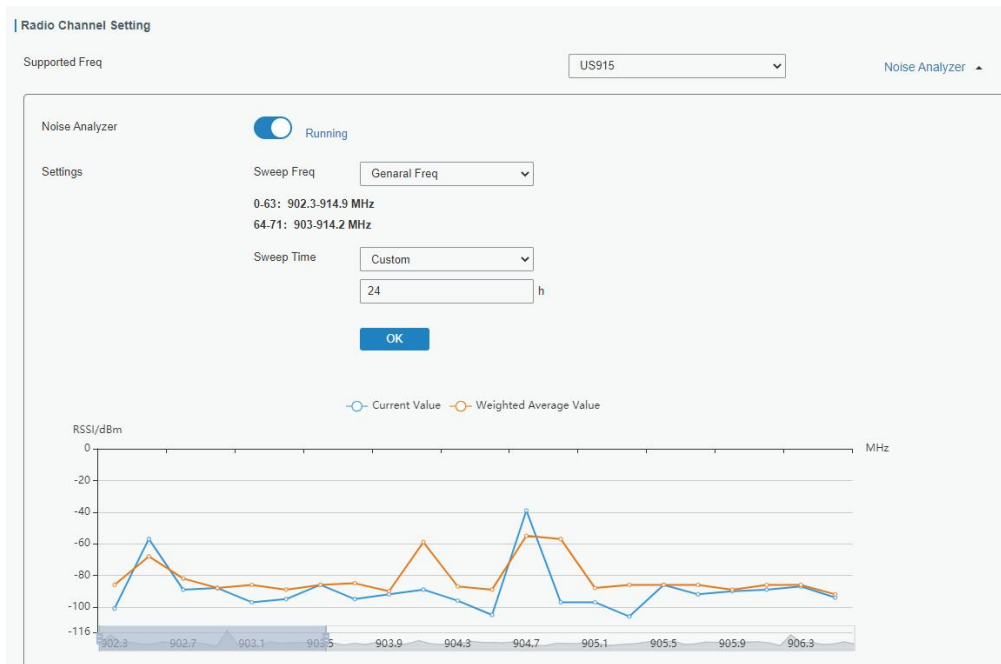

Item	Description	Default
Enable	Click to enable noise analyzer feature.	Disabled
Sweep Freq	Select the frequency sweeping range. General Freq: frequencies based on the LoRaWAN® regional parameters document Custom: custom the frequency range	General Freq
Sweep Time	Enable the noise analyzer continuously or within a period of time. If Custom is selected, the noise analyzer will stop automatically after the pre-configured time. Note: It's suggested to custom the time since noise analyzer feature will affect the normal data transmission.	Custom/24h

#### 4.1.4. Advanced

This section is about settings in details of beacon transmitting and validating.

General	Radios	Advanced	Custom	Traffic
<b>  Beacon Setting</b>				
Beacon Period		0	s	
Beacon Freq		508300000	Hz	
Beacon Datarate		SF10		
Beacon Channel Number		3		
Beacon Freq Step		200000	Hz	
Beacon Bandwidth		125000	Hz	
Beacon TX Power		14	dBm	

Item	Description	Default
Beacon Period	Interval of gateway sending beacons for Class B device time synchronization. 0 means the gateway will not send beacons.	0
Beacon Freq	The frequency of beacons.	Based on the supported frequency
Beacon Datarate	The datarate of beacons.	Based on the supported frequency
Beacon Channel Number	When selecting Custom, it allows users to custom range from 1 to 8.	1
Beacon Freq Step	Frequency interval of beacons.	200000
Beacon Bandwidth	The bandwidth of beacons. Unit: Hz	12500 Hz
Beacon TX Power	The TX power of beacons.	Based on the supported frequency

**Intervals Setting**

Keep Alive Interval  s

Stat Interval  s

Push Timeout  ms

**Forward CRC Setting**

Forward CRC Disabled ☐

Forward CRC Error ☐

Forward CRC Valid ☒

Item	Description	Default
Keep Alive Interval	Enter the interval of keepalive packet which is sent from gateway to network server to keep the connection stable and alive. Range: 1-3600.	10
Stat Interval	Enter the interval to update the network server with gateway statistics. Range: 1-3600.	30
Push Timeout	Enter the timeout to wait for the response from server after the gateway sends data of node. Rang: 1-1999.	100
Forward CRC Disabled	Enable to send packets received with CRC disabled to the network server.	Disabled
Forward CRC Error	Enable to send packets received with CRC errors to the network server.	Disabled
Forward CRC Valid	Enable to send packets received with CRC valid to the network server.	Enabled

Table 3-2-1-9 Advanced Parameters

**LBT Settings**

Enable ☒

RSSI Target  dBm

Item	Description	Default
Enable	Enable or disable LBT feature. Listen before talk (LBT) is used to detect whether the downlink channel is idle and avoid channel access conflicts. Note: AU915 and US915 do not support LBT feature.	Disabled
RSSI Target	Enter the criteria of an idle channel. If actual RSSI of a channel is less than the criteria/target, the channel is	-80

	considered as idle. Range: -120~0	
--	-----------------------------------	--

#### 4.1.5. Custom

When Custom Configuration mode is enabled, you can write your own packet forwarder configuration file in the edit box to configure packet forwarder. Click “Save” to save your custom configuration file content, and click “Apply” to take effect. You can click “Clear” to erase all content in the edit box. If you don’t know how to write configuration file, please click “Example” to go to reference page.

**Note:** customized configuration will overwrite the packet forward configurations of web GUI.

General Radios Advanced **Custom** Traffic

**Custom Configuration**

Enable ☒

[Example](#)

```
{
  "SX1302_conf": {
    "spidev_path": "/dev/spidev0.0",
    "lorawan_public": true,
    "clksrc": 0,
    "antenna_gain": 0, /* antenna gain, in dBi */
    "antenna_cfg": "ITXIRX",
    "full_duplex": false,
    "precision_timestamp": {
      "enable": false,
      "max_ts_metrics": 255,
      "nb_symbols": 1
    },
  },
  "radio_0": {
    "enable": true,
    "type": "SX1250",
    "freq": 863000000
  }
}
```

#### 4.1.6. Traffic

When navigating to the traffic page, any recent traffic received by the gateway will display. To watch live traffic, click **Refresh**.

Traffic Setting

[Refresh](#) [Clear](#)

Rfch	Direction	Time	Ticks	Frequency	Datarate	Coderate	RSSI	SNR
1	up	-	83002508	922.8	SF9BW125	4/5	-103	-13.2
1	up	-	71108156	922.6	SF9BW125	4/5	-102	-13.2
1	up	-	35426956	922.8	SF9BW125	4/5	-103	-9.8
1	up	-	3171639508	922.6	SF9BW125	4/5	-100	-10.5
1	up	-	3159744804	922.6	SF9BW125	4/5	-102	-13.0
1	up	-	3155781348	922.6	SF9BW125	4/5	-101	-12.2
1	up	-	3147851660	922.6	SF9BW125	4/5	-102	-13.8
1	up	-	3143888916	922.8	SF9BW125	4/5	-102	-13.2
1	up	-	3139922740	922.8	SF9BW125	4/5	-100	-12.2
1	up	-	3124065788	922.8	SF9BW125	4/5	-100	-12.8

Figure 3-2-1-12

Item	Description
Refresh	Click to obtain the latest data.
Clear	Click to clear all data.
Rfch	Show the channel of this packet.
Direction	Show the direction of this packet.
Time	Show the receiving time of this packet.
Ticks	Show the ticks of this packet.
Frequency	Show the frequency of the channel.
Datarate	Show the datarate of the channel.
Coderate	Show the coderate of this packet.
RSSI	Show the received signal strength.
SNR	Show the signal to noise ratio of this packet.

## 4.2. Network Server

### 4.2.1. General

**General Setting**

Enable

☒

Platform Mode

☐

NetID

010203

Join Delay

5

sec

RX1 Delay

1

sec

Lease Time

8760-0-0

hh-mm-ss

Log Level

info

▼

**Global Channel Plan Setting**

Channel Plan

US915

▼

Channel

8-15

Item	Description	Default
<b>General Setting</b>		
Enable	Click to enable Network Server mode.	Enabled
NetID	Enter the network identifier.	010203

Join Delay	Enter the interval time between when the end-device sends a Join_request_message to network server and when the end-device prepares to open RX1 to receive the Join_accept_message sent from network server.	5
RX1 Delay	Enter the interval time between when the end-device sends uplink packets and when the end-device prepares to open RX1 to receive the downlink packet.	1
Lease Time	Enter the amount of time till a successful join expires. The format is hours-minutes-seconds. If the join-type is OTAA, then the end-devices need to join the network server again when it exceeds the lease time.	876000-00-00
Log level	Choose the log level.	Info
Channel Plan Setting		
Channel Plan	Choose LoRaWAN® channel plan used for the upstream and downlink frequencies and datarates. Available channel plans depend on the gateway's model.	Depend on the gateway's frequency
Channel	<p>Allow end devices to communicate with specific frequency channels.</p> <p>Leave it blank means using all the default standard usable channels specified in the LoRaWAN® regional parameters document.</p> <p>It allows to enter the index of the channels.</p> <p>Examples:</p> <p>1, 40: Enabling Channel 1 and Channel 40</p> <p>1-40: Enabling Channel 1 to Channel 40</p> <p>1-40, 60: Enabling Channel 1 to Channel 40 and Channel 60</p>	Depend on the gateway's frequency

**Note:** For some regional variants, if allowed by your LoRaWAN® region, you can use Additional Plan to configure additional channels undefined by the LoRaWAN® Regional Parameters, like EU868 and KR920, as the following picture shows:

Additional Channels			
Frequency(MHz)	Min Datarate	Max Datarate	Operation
			



Additional Channels		
Item	Description	Default
Frequency/MHz	Enter the frequency of the additional plan.	Null.
Max Datarate	Enter the max datarate for the end-device. The range is based on what is specified in the LoRaWAN® regional parameters document.	DR0(SF12,125kHz)
Min Datarate	Enter the min datarate for the end-device. The range is based on what is specified in the LoRaWAN® regional parameters document.	DR3(SF9,125kHz)

Table 3-2-2-2 Additional Plan Parameters

## 4.2.2. Application

An application is a collection of devices with the same purpose/of the same type. Users can add a series of devices to the same application which needs to send to the same server.

You can edit the application by clicking  or create a new application by clicking .

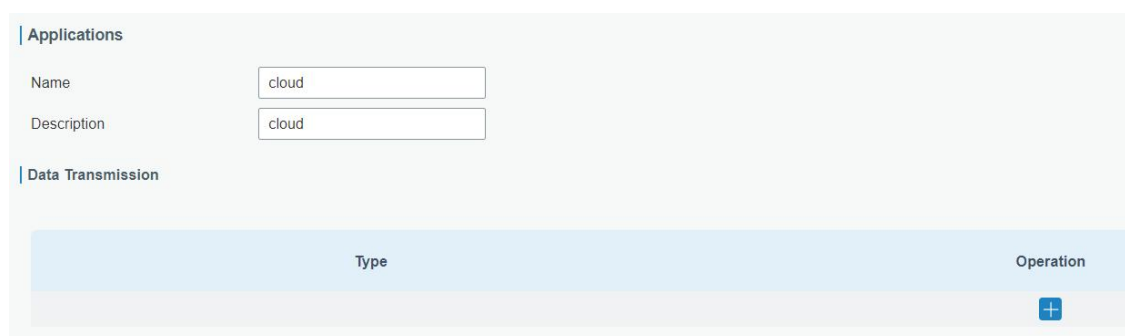


Figure 3-2-2-3

Application	
Item	Description
Name	Enter the name of the application profile. E.g smoker-sensor-app.
Description	Enter the description of this application. E.g an application for smoker sensor.
Data Transmission	Data will be sent to your custom server using the MQTT, HTTP, HTTPS or BACnet/IP protocol. One application can add 3 data transmissions at most and every protocol can be selected only once.

Table 3-2-2-3 Application Parameters

## MQTT Integration

Type MQTT

Status -

**General**

Broker Address

Broker Port

Client ID

Connection Timeout/s

Keep Alive Interval/s

**User Credentials**

Enable ☒

Username

Password

**TLS**

Enable ☒

Mode CA signed server certificate

Figure 3-2-2-4

**Topic**

Data Type	topic	
Uplink data	<input type="text"/>	QoS 0
Downlink data	<input type="text"/>	QoS 0
Multicast downlink data	<input type="text"/>	QoS 0
Join notification	<input type="text"/>	QoS 0
ACK notification	<input type="text"/>	QoS 0
Error notification	<input type="text"/>	QoS 0
Request data	/event/request	QoS 0
Response data	/event/response	QoS 0

Figure 3-2-2-5

MQTT Settings	
Item	Description
<b>General</b>	
Broker Address	MQTT broker address to receive data.
Broker Port	MQTT broker port to receive data.
Client ID	Client ID is the unique identity of the client to the server.

	It must be unique when all clients are connected to the same server, and it is the key to handle messages at QoS 1 and 2.
Connection Timeout/s	If the client does not get a response after the connection timeout, the connection will be considered as broken. The Range: 1-65535
Keep Alive Interval/s	After the client is connected to the server, the client will send heartbeat packet to the server regularly to keep alive. Range: 1-65535
<b>User Credentials</b>	
Enable	Enable user credentials.
Username	The username used for connecting to the MQTT broker.
Password	The password used for connecting to the MQTT broker.
<b>TLS</b>	
Enable	Enable the TLS encryption in MQTT communication.
Mode	Select from "Self signed certificates" , "CA signed server certificate" . CA signed server certificate: verify with the certificate issued by Certificate Authority (CA) that pre-loaded on the device. Self signed certificates: upload the custom CA certificates(.crt or .pem), client Certificates(.crt) and secret key(.key) for verification.
<b>Topic</b>	
Data Type	Data type to communicate with MQTT broker: Uplink Data: receive device uplink packets Downlink Data: send downlink commands to device Multicast Downlink Data: send downlink commands to multicast group Join Notification: receive join request packets from devices ACK Notification: receive ACK packets from devices Error Notification: receive error packets from devices Request data: send requests to enquire and configure the gateway NS Response data: receive the request responses
Topic	Topic name of the data type used for publishing.
QoS	QoS 0 - Only Once This is the fastest method and requires only 1 message. It is also the most unreliable transfer mode. QoS 1 - At Least Once This level guarantees that the message will be delivered at least once, but may be delivered more than once. QoS 2 - Exactly Once QoS 2 is the highest level of service in MQTT. This level guarantees that each message is received only once by the intended recipients. QoS 2 is the safest and slowest quality of service level.

Table 3-2-2-4 MQTT Settings Parameters

**Note:** if MQTT broker type is HiveMQ, please enable **TLS** and set the option as **CA signed server certificate**.

### HTTP/HTTPS Integration

The screenshot displays the configuration interface for HTTP/HTTPS integration. It is divided into two main sections: 'HTTP Header' and 'URL'.

**HTTP Header Section:**

Header Name	Header Value	Operation
+		

**URL Section:**

Data Type	URL
Uplink data	<input type="text"/>
Join notification	<input type="text"/>
ACK notification	<input type="text"/>
Error notification	<input type="text"/>

Figure 3-2-2-6

HTTP/HTTPS Settings	
Item	Description
HTTP Header	
Header Name	A core set of fields in the HTTP header.
Header Value	Value of the HTTP header.
URL	
Data Type	Data type sent to HTTP/HTTPS server.
Topic	Topic name of the data type used for publishing.
URL	HTTP/HTTPS server URL to receive data.

Table 3-2-2-5 HTTP/HTTPS Settings Parameters

### Related Configuration Example

[Application configuration](#)

### 4.2.3. Payload Codec

Users can customize the payload codec of other brands of devices or adjust the uplink and downlink contents as requirements.

Inbuilt Payload Codec Library

Library Version

1.0.0

Obtaining Type

Online

Obtain

Note: Ensure that the Internet access is available.

Name	Payload decoder function	Payload encoder function	Details
AM103 & AM103L	✓	✓	!
AM104	✓	✓	!
AM107	✓	✓	!
AM307	✓	✓	!
AM308	✓	✓	!
AM319-HCHO	✓	✓	!
AM319-HCHO-IR	✓	✓	!
AM319-O3	✓	✓	!
EM300-TH	✓	✓	!
WS101	✓	✓	!

Showing 1 to 10 of 30 rows

10

rows per page

<

1

2

3

>

Figure 3-2-2-7

Inbuilt Payload Codec Library	
Item	Description
Library Version	Show the version of the LoRaWAN node payload codec library.
Obtaining Type	<p>Select the type to update the devices payload codec library.</p> <p>Online: update automatically if gateway detects there is version update every time gateway powers on and accesses the Internet. Users can also click Obtain button to check update status manually.</p> <p>Local Upload: click Browse to upload the zip format payload codec package and click Import to update the library.</p>
Name	Show the corresponding product model of the payload codec.
Payload decoder/encoder function	Show if decoder and encoder are existed.
Details	Show the details of decoder and encoder. If this does not meet your requirement, please customize your payload codec.

Table 3-2-2-6 Inbuilt Payload Codec Library Parameters

Name

Description

Template

None

Payload decoder

Payload decoder function

```

1 // Decode decodes an array of bytes into an object.
// - fPort contains the LoRaWAN fPort number
// - bytes is an array of bytes, e.g. [225, 230, 255, 0]
// The function must return an object, e.g. {"temperature": 22.5}
function Decode(fPort, bytes) {
  return {};
}

```

Payload encoder

Payload encoder function

```

1 // Encode encodes the given object into an array of bytes.
// - fPort contains the LoRaWAN fPort number
// - obj is an object, e.g. {"temperature": 22.5}
// The function must return an array of bytes, e.g. [225, 230, 255, 0]
function Encode(fPort, obj) {
  return [];
}

```

Payload Codec Test

☒

```

1 // input decoded test payload or encoded test payload
// decoded bytes
// 01 75 5C 03 67 34 01 04 68 65 05 6A 49 00 06 65 1C 00 79 00 14 00 07 7D E7 04 08 7D 07 00 09 73 3F 27
// encoded obj's
// {}

```

Figure 3-2-2-8

Custom Payload Codec	
Item	Description
Name	Enter the unique name of the custom payload codec.
Description	Enter the description of this payload codec.
Template	Select an existing inbuilt payload codec as a template.
Payload Decoder/Encoder Function	Customize the device payload decoder or encoder. Note that the function header should be the same as the example on the blanks.
Payload Codec test	Disable or enable payload codec test.
fPort	Application port of LoRaWAN devices. It ' s 85 by default for LoRaWAN devices.
Decode	Enter the hex format raw data and click Decode to check the result.
Encode	Enter the JSON format command and check Encode to check the result.

Table 3-2-2-7 Custom Payload Codec Parameters

#### 4.2.4. Profiles

A Profile defines the device capabilities and boot parameters that are needed by the Network Server for setting the LoRaWAN<sup>®</sup> radio access service. These information elements shall be provided by the end-device manufacturer. LG280 has pre-configured 8 device files and users can also create a new device profile.















General	Applications	Payload Codec	Profiles	Device	Multicast Groups	Gateway Fleet	Packets
Device Profiles							
Name		Max TXPower	Join Type	Class Type	Operation		
ClassA-ABP		0	ABP	Class A	 		
ClassA-OTAA		0	OTAA	Class A	 		
ClassB-ABP		0	ABP	Class A Class B	 		
ClassB-OTAA		0	OTAA	Class A Class B	 		
ClassC-ABP		0	ABP	Class A Class C	 		
ClassC-OTAA		0	OTAA	Class A Class C	 		
ClassCB-ABP		0	ABP	Class A Class B Class C	 		
ClassCB-OTAA		0	OTAA	Class A Class B Class C	 		
							

Figure 3-2-2-9

**Device Profiles**

Name

Max TXPower

0

Join Type

OTAA

Class Type

☒ Class A
 ☐ Class B
 ☐ Class C

Advanced

☐

Figure 3-2-2-10

Device Profiles Settings	
Item	Description
Name	Enter the name of the device profile.
Max TXPower	Enter the maximum transmit power. The TXPower indicates power levels relative to the Max EIRP level of the end-device. 0 means using the max EIRP. EIRP refers to the Equivalent Isotropically Radiated Power.
Join Type	Select from: "OTAA" and "ABP" .
Class Type	Class A is fixed as enabled. Users can check the box of Class B or Class C to add the class type. Note: Beacon period should be set to nonzero value in Packet Forwarder > Advanced if using Class B.

Table 3-2-2-8 Device Profiles Setting Parameters

Advanced	<input checked="" type="checkbox"/>
MAC Version	1.0.2
Regional Parameters Revision	B
RX1 Datarate Offset	0
RX2 Datarate	DR0 (SF12, 125 kHz)
RX2 Channel Frequency	505300000 Hz
Frequency List	Hz
Device Channel	

Figure 3-2-2-11

Device Profile Advanced Settings		
Item	Description	Default
MAC Version	Choose the version of the LoRaWAN® supported by the end-device.	1.0.2
Regional Parameter Revision	Revision of the Regional Parameters document supported by the end-device.	B
RX1 Datarate Offset	The offset which used for calculating the RX1 data-rate, based on the uplink data-rate.	Based on what is specified in the LoRaWAN® regional parameters document
RX2 Datarate	Enter the RX2 datarate which used for the RX2 receive-window.	
RX2 Channel Frequency	RX2 channel frequency which used for the RX2 receive-window.	
Frequency List	List of factory-preset frequencies. The range is based on what is specified in the LoRaWAN® regional parameters document.	Null
Device Channel	Change this device frequency channel by typing the channel indexes. When configured, it takes precedence over the global channel. This setting only works for CN470/US915/AU915 gateway.	Null
PingSlot Period	Period of opening the pingslot.	Every Second
PingSlot DataRate	Datarate of the node receiving downlinks.	Based on the supported frequency
PingSlot Freq	Frequency of the node receiving downlinks.	Based on the supported



		frequency
ACK Timeout	The time for confirmed downlink transmissions. This option is only applicable to class B and class C.	Class B: 10 Class C: 10

Table 3-2-2-9 Device Profiles Advanced Setting Parameters

## 4.2.5. Device

A device is the end-device connecting to, and communicating over the LoRaWAN® network.

Device Name	Device EUI	Device-Profile	Application	Last Seen	Activated	Operation
24E124414B032563	24E124414B032563	classB	cloud	11 days ago	✓	<a href="#">✎</a> <a href="#">✕</a>
24E124414A501971	24E124414A501971	OTAA-calsB	cloud	28 days ago	✓	<a href="#">✎</a> <a href="#">✕</a>
1152-test	24E1612290821375	ClassC-OTAA	cloud	63 days ago	✓	<a href="#">✎</a> <a href="#">✕</a>

Showing 1 to 3 of 3 rows


Item	Description
Add	Add a device.
Bulk Import	Download template and import multiple devices.
Delete All	Delete all devices in the list.
Device Name	Show the name of the device.
Device EUI	Show the EUI of the device.
Device-Profile	Show the name of the device's device profile.
Application	Show the name of the device's application.
Last Seen	Show the time of last packet received.
Activated	Show the status of the device .  means that the device has been activated.
Operation	Edit or delete the device.

Table 3-2-2-10 Device Parameters

Device Name	<input type="text" value="lora-sensor"/>
Description	<input type="text" value="a short description of your node"/>
Device EUI	<input type="text" value="24e1641194784358"/>
Device-Profile	<input type="text" value="ClassC-OTAA"/>
Application	<input type="text" value="cloud"/>
Payload Codec	<input type="text"/>
fPort	<input type="text" value="1"/>
Modbus RTU Data Transmission	<input type="text" value="Modbus RTU over TCP"/>
Modbus RTU Fport	<input type="text"/>
TCP Port	<input type="text"/>
Frame-counter Validation	<input type="checkbox"/>
Application Key	<input type="text"/>
Device Address	<input type="text"/>
Network Session Key	<input type="text"/>
Application Session Key	<input type="text"/>
Uplink Frame-counter	<input type="text" value="0"/>
Downlink Frame-counter	<input type="text" value="0"/>

Figure 3-2-2-13

Device Configuration	
Item	Description
Device Name	Enter the name of this device.
Description	Enter the description of this device.
Device EUI	Enter the EUI of this device.
Device-Profile	Choose the device profile.
Application	Choose the application profile.
Payload Codec	Choose the payload codec existed on Payload Codec page.
fPort	Enter the downlink port of device, it's 85 by default for devices.
Modbus RTU Data Transmission	Choose from: "Disable", "Modbus RTU to TCP", "Modbus RTU over TCP". This feature is only applicable to LoRaWAN® controllers. Modbus RTU to TCP: TCP client can send Modbus TCP commands to ask for controller Modbus data. Modbus RTU over TCP: TCP client can send Modbus RTU commands to ask for controller Modbus data.
Modbus RTU Fport	Enter the LoRaWAN® frame port for transparent transmission between LoRaWAN® controllers and LG280. Range: 2-84, 86-223.

	Note: this value must be the same as the LoRaWAN® controller's Fport.
TCP Port	Enter the TCP port for data transmission between the TCP Client and LG280 (as TCP Server). Range: 1-65535.
Frame-Counter Validation	If disable the frame-counter validation, it will compromise security as it enables people to perform replay-attacks.
Application Key	Whenever an end-device joins a network via over-the-air activation, the application key is used for derive the Application Session key.
Device Address	The device address identifies the end-device within the current network.
Network Session Key	The network session key specific for the end-device. It is used by the end-device to calculate the MIC or part of the MIC (message integrity code) of all uplink data messages to ensure data integrity.
Application Session Key	The AppSKey is an application session key specific for the end-device. It is used by both the application server and the end-device to encrypt and decrypt the payload field of application-specific data messages.
Uplink Frame-counter	The number of data frames which sent uplink to the network server. It will be incremented by the end-device and received by the end-device. Users can reset the a personalized end-device manually, then the frame counters on the end-device and the frame counters on the network server for that end-device will be reset to 0.
Downlink Frame-counter	The number of data frames which received by the end-device downlink from the network server. It will be incremented by the network server. Users can reset the a personalized end-device manually, then the frame counters on the end-device and the frame counters on the network server for that end-device will be reset to 0.

Table 3-2-2-11 Device Setting Parameters

### Related Configuration Example

[Device configuration](#)

#### 4.2.6. Multicast Groups

gateways support for creating Class B or Class C multicast groups to send downlink messages to a group of end devices. A multicast group is a virtual ABP device (i.e. shared session keys), does not support uplink, confirmed downlink nor MAC commands.

The screenshot shows a web interface for managing multicast groups. At the top, there's a header 'Multicast Groups' with an 'Add' button. Below it is a search bar. The main area contains a table with the following columns: 'Multicast Address', 'Group Name', 'Number of Devices', and 'Operation'. The table is currently empty, displaying the message 'No matching records found'.

Figure 3-2-2-14

Item	Description
Add	Add a multicast group.
Group Name	Show the name of the group.
Number of Devices	Show the device number of the group.
Operation	Edit or delete the multicast group.

Table 3-2-2-12 Multicast Group Parameters

The screenshot shows a configuration form for a multicast group. It includes the following fields:
 

- Group Name: Text input field.
- Multicast Address: Text input field.
- Multicast Network Session Key: Text input field.
- Multicast Application Session Key: Text input field.
- Class Type: Dropdown menu with 'Class C' selected.
- Datarate: Dropdown menu with 'DR8(SF12,500KHz)' selected.
- Frequency: Text input field with '923300000' and a unit 'Hz'.
- Frame-counter: Text input field with '0'.
- Selected Devices: A large text area for listing devices.
- Add Device: A dropdown menu to select a device.

Figure 3-2-2-15

Multicast Group Configuration	
Item	Description
Group Name	Enter the name of this multicast group.
Multicast Address	Device address (Dev Addr) of all devices in this group.
Multicast Network Session Key	The network session key (Netwks Key) of all devices in this group.
Multicast Application	The application session key(AppSKey) of all devices in this group.

Session Key	
Class Type	Class B and Class C are optional.
Datarate	Datarate of the node receiving downlinks
Frequency	Downlink frequency of all devices in this group.
Frame-counter	The number of data frames which received by the end-device downlink from the network server. It will be incremented by the network server.
Ping Slot Periodicity	Period of opening the pingslot. This is only applied to Class B end devices.
Selected Devices	Show all device names in this group.
Add Device	Add devices in the pull-down list.

Table 3-2-2-13 Multicast Group Setting Parameters

## 4.2.7. Gateway Fleet

gateways can connect to LG280 network server. A gateway supports to add 100 gateways at most.




Gateway Fleet				
Gateway ID	Name	Status	Last Seen	Operation
24E124FFFEF12263	Local Gateway	Connected	2021-04-19 16:12:27	 
				

Figure 3-2-2-16

Item	Description
Gateway ID	Show the gateway ID.
Name	Show the name of the gateway.
Status	Show the connection status of the gateway.
Last Seen	Show the time of last packet received.
Operation	Edit or delete the gateway.

Table 3-2-2-14 Gateway Fleet Parameters

Gateway ID

Name

Location

GPS info will be displayed by default or can be changed manually

Latitude

Longitude

Altitude

 m

Figure 3-2-2-17

Item	Description
Gateway ID	Enter the unique gateway ID to recognize the gateway.
Name	Enter the name of this gateway.
Location	GPS data of the gateway can be edited here. If gateway sends GPS data it will replace your customized data.

Table 3-2-2-15 Gateway Setting Parameters

## 4.2.8. Packets

Figure 3-2-2-18


Send Data To Device/Multicast Group	
Item	Description
Device EUI	Enter the EUI of the device to receive the payload.
Multicast Group	Select the multicast group to send downlinks. Multicast groups can be added under Multicast Groups tab.
Type	Choose the payload type to enter in the payload Input box: ASCII, Hex, base64.
Payload	Enter the message to be sent to this device.
Port	Enter the LoRaWAN® frame port for packet transmission between device and Network Server.
Confirmed	After enabled, the end device will receive downlink packet and should answer “confirmed” to the network server. Multicast feature does not support confirmed downlink.

Table 3-2-2-16 Send Data to Device Parameters

Network Server	
Item	Description
Device EUI/Group	Show the EUI of the device or multicast group.
Frequency	Show the used frequency to transmit packets.
Datarate	Show the used datarate to transmit packets.
SNR	Show the signal-noise ratio.
RSSI	Show the received signal strength indicator.
Size	Show the size of payload.
Fcnt	Show the frame counter.
Type	Show the type of the packet: JnAcc - Join Accept Packet JnReq - Join Request Packet UpUnc - Uplink Unconfirmed Packet UpCnf - Uplink Confirmed Packet - ACK response from network requested DnUnc - Downlink Unconfirmed Packet DnCnf - Downlink Confirmed Packet- ACK response from end-device requested
Time	Show the time of packet was sent or received.

Table 3-2-2-17 Packet Parameters

Click  to get more details about the packet. As shown:

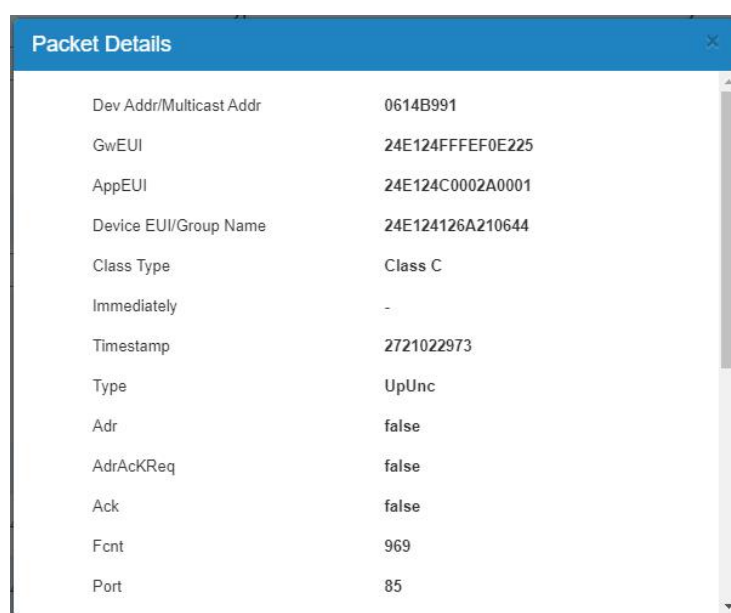

Packet Details	
Dev Addr/Multicast Addr	0614B991
GwEUI	24E124FFFEF0E225
AppEUI	24E124C0002A0001
Device EUI/Group Name	24E124126A210644
Class Type	Class C
Immediately	-
Timestamp	2721022973
Type	UpUnc
Adr	false
AdrAckReq	false
Ack	false
Fcnt	969
Port	85

Figure 3-2-2-19

Item	Description
Dev Addr/Multicast	Show the address of the device/multicast group.

Addr	
GwEUI	Show the EUI of the gateway.
AppEUI	Show the EUI of the application.
DevEUI/Group Name	Show the EUI of the device/multicast group name.
Class Type	Show the class type of the device or multicast group.
Immediately	True: Device may transmit an explicit (possibly empty) acknowledgement data message immediately after the reception of a data message requiring a confirmation.
Timestamp	Show the timestamp of this packet.
Type	Show the type of the packet: JnAcc - Join Accept Packet JnReq - Join Request Packet UpUnc - Uplink Unconfirmed Packet UpCnf - Uplink Confirmed Packet - ACK response from network requested DnUnc - Downlink Unconfirmed Packet DnCnf - Downlink Confirmed Packet- ACK response from end-device requested
Adr	True: The end-node has enabled ADR. False: The end-node has not enabled ADR.
AdrAckReq	In order to validate that the network is receiving the uplink messages, nodes periodically transmit ADRACKReq message. This is 1 bit long. True: Network should respond in ADR_ACK_DELAY time to confirm that it is receiving the uplink messages. False: ADR is disabled or Network does not respond in ADR_ACK_DELAY.
Ack	True: This frame is ACK. False: This frame is not ACK.
Fcnt	Show the frame-counter of this packet. The network server tracks the uplink frame counter and generates the downlink counter for each end-device.
FPort	FPort is a multiplexing port field. If the frame payload field is not empty, the port field must be present. If present, a FPort 16 value of 0 indicates that the FRMPayload contains MAC commands only. When this is the case, the FOptsLen field must be zero. FOptsLen is the length of the FOpts field in bytes.
Modulation	LoRa means the physical layer uses the LoRa modulation.
Bandwidth	Show the bandwidth of this channel.



SpreadFactor	Show the spreadFactor of this channel.
Bitrate	Show the bitrate of this channel.
CodeRate	Show the coderate of this channel.
SNR	Show the SNR of this channel.
RSSI	Show the RSSI of this channel.
Power	Show the transmit power of the device.
Payload (b64)	Show the application payload of this packet.
Payload (hex)	Show the application payload of this packet.
Json	Show the data after decoded.
MIC	Show the MIC of this packet. MIC is a cryptographic message integrity code, computed over the fields MHDR, FHDR, FPort and the encrypted FRMPayload.

Table 3-2-2-18 Packets Details Parameters

## Related Topic

[Send Data to Device](#)

## 4.3. Protocol Integration

### 4.3.1. BACnet Server

LG280 can work as LoRaWAN to BACnet gateway to integrate with BMS system easily.

#### 4.3.1.1. Server

Server

Enable

☒

UDP Port

47808

Device ID

40185

Device Name

UG67-6222B4620088

BBMD

☒

IP Address

IP Port

47808

Time TO Live

60000

s

Figure 3-3-1-1

Server Settings	
Item	Description
Enable	Enable or disable BACnet server function.

UDP Port	Set communication port of BACnet/IP. Range: 1-65535. The default port is 47808.
Device ID	The unique BACnet device identifier which needs to avoid conflict with other devices.
Device Name	The device name to represent the device.
BBMD	Enable BBMD(BACnet/IP Broadcast Management Device) if BACnet devices of different network subnets should work together.
IP Address	Fill in the IP address of BBMD device or external device registrar.
IP Port	Fill in the UDP/IP port for external device registration.
Time TO Live	Number of seconds used on external device registration.

Table 3-3-1-1 Server Parameters

#### 4.3.1.2. BACnet Object

Object Name	Object Type	Object Instance Nr	Present Value	Units	Updates	Update time	COV	Operation
24E124592B322496.button_...	Analog-Input	0	1670892748800.0	no-units	539	2022-12-13 08:52:06	Disabled	

Showing 1 to 1 of 1 rows

Figure 3-3-1-2

Item	Description
Add	Add a BACnet object. The gateway supports adding 2000 objects at most.
Bulk Import	Download template and import multiple BACnet objects.
Bulk Export	Export all generated BACnet object settings.
Delete All	Delete all objects in the list.
Object Name	Show the name of the BACnet object.
Object Type	Show the type of this object.
Object Instance Nr	Show the instance number of this object.
Present Value	Show the latest value of object.
Units	Show the unit of this object value.
Updates	Show the update times of this object value.
Update time	Show the time for this object to get and update the data.
COV	Show if COV (Change of value) is enabled.
Operation	Edit or delete the object.

Table 3-3-1-2 BACnet Object List Parameters

### BACnet Object

Device Name

AM308 ▼

LoRa Object

temperature ▼

Object Name

AM308.temperature

Object Type

Analog-Input ▼

The Object Instance

0

Units

°C(62) ▼

Description

COV

☐

Figure 3-3-1-3

BACnet Object Configuration	
Item	Description
Device Name	Select the device added on Network Server > Device page.
LoRa Object	Select one of device variables as an object.
Object Name	Customize an unique name for this object.
Object Type	Select the object type as binary input/output/value, analog input/output/value, multistate input/output/value and charcterString value.
The Object Instance	Customize the object instance.
Description	Enter the description of this object.
Analog Input/Output/Value	
Units	Select the unit of this object value.
COV	When object value changes, the BACnet server (gateway) will send notification of new value to BACnet client. This only applies to analog type objects.
COV Increment	Only when the object value reaches or over this increment, the BACnet server (gateway) will send the notification.
Relinquish Default	If there is no command, the analog output will be set as this relinquish default value.
Binary Input/Output/Value	
Polarity	Define the binary input/output status as Normal or Reverse.
Active Text	Characterize the intended effect of active state of binary type object value. Example: when a button is pressed and binary input is 1, active text can be defined as "Pressed" .
Inactive Text	Characterize the intended effect of inactive state of binary type

	object value. Example: for a button, inactive text can be defined as "Unpressed" .
Relinquish Default	If there is no command, the analog output or binary output will be set as this relinquish default value.
MultiState Input/Output/Value	
Number of States	Set the number of states and define the name of every state.
Relinquish Default	If there is no command, the multistate output will be set as this relinquish default value.

Table 3-3-1-3 BACnet Object Configuration Parameters

### 3.4 Network

#### 4.3.2. Interface

##### 4.3.2.1. Port

The Ethernet port can be connected with Ethernet cable to get Internet access. It supports 3 connection types.

- **Static IP:** configure IP address, netmask and gateway for Ethernet WAN interface.
- **DHCP Client:** configure Ethernet WAN interface as DHCP Client to obtain IP address automatically.
- **PPPoE:** configure Ethernet WAN interface as PPPoE Client.

The screenshot shows the configuration page for 'Port\_1'. It includes the following fields and values:

- Port: eth 0 (dropdown menu)
- Connection Type: Static IP (dropdown menu)
- IP Address: 192.168.23.150
- Netmask: 255.255.255.0
- Gateway: 192.168.23.1
- MTU: 1500
- Primary DNS Server: 8.8.8.8
- Secondary DNS Server: 223.5.5.5
- Enable NAT: ☒

Figure 3-4-1-1

Port Setting		
Item	Description	Default
Port	The port that is fixed as eth0 port and enabled.	eth 0

Connection Type	Select from "Static IP", "DHCP Client" and "PPPoE".	Static IP
MTU	Set the maximum transmission unit.	1500
Primary DNS Server	Set the primary DNS.	8.8.8.8
Secondary DNS Server	Set the secondary DNS.	223.5.5.5
Enable NAT	Enable or disable NAT function. When enabled, a private IP can be translated to a public IP.	Enable

Table 3-4-1-1 Port Parameters

## Related Configuration Example

### Ethernet Connection

#### 1. Static IP Configuration

If the external network assigns a fixed IP for the Ethernet port, user can select "Static IP" mode.

The screenshot shows the configuration page for 'Port\_1'. The 'Connection Type' is set to 'Static IP'. The following fields are filled: IP Address (192.168.23.150), Netmask (255.255.255.0), Gateway (192.168.23.1), MTU (1500), Primary DNS Server (8.8.8.8), and Secondary DNS Server (223.5.5.5). The 'Enable NAT' checkbox is checked. At the bottom, there is a section for 'Multiple IP Address' with a table header: IP Address, Netmask, and Operation. A plus icon is visible in the bottom right corner of this section.

Figure 3-4-1-2

Static IP		
Item	Description	Default
IP Address	Set the IP address which can access Internet.	192.168.23.150
Netmask	Set the Netmask for Ethernet port.	255.255.255.0
Gateway	Set the gateway's IP address for Ethernet port.	192.168.23.1
Multiple IP Address	Set the multiple IP addresses for Ethernet port.	Null

Table 3-4-1-2 Static IP Parameters

2. DHCP Client

If the external network has DHCP server enabled and has assigned IP addresses to the Ethernet WAN interface, user can select “DHCP client” mode to obtain IP address automatically.

Port\_1

Port

eth 0

Connection Type

DHCP Client

MTU

1500

Use Peer DNS

☐

Primary DNS Server

8.8.8.8

Secondary DNS Server

223.5.5.5

Enable NAT

☒

Figure 3-4-1-3

DHCP Client	
Item	Description
Use Peer DNS	Obtain peer DNS automatically during PPP dialing. DNS is necessary when user visits domain name.

Table 3-4-1-3 DHCP Client Parameters

3. PPPoE

PPPoE refers to a point to point protocol over Ethernet. User has to install a PPPoE client on the basis of original connection way. With PPPoE, remote access devices can get control of each user.

Port\_1

Port

eth 0

Connection Type

PPPoE

Username

Password

Link Detection Interval(s)

60

Max Retries

0

MTU

1500

Use Peer DNS

☐

Primary DNS Server

8.8.8.8

Secondary DNS Server

223.5.5.5

Enable NAT

☒

Figure 3-4-1-4

PPPoE	
Item	Description
Username	Enter the username provided by your Internet Service Provider (ISP).
Password	Enter the password provided by your Internet Service Provider (ISP).
Link Detection Interval (s)	Set the heartbeat interval for link detection. Range: 1-600.
Max Retries	Set the maximum retry times after it fails to dial up. Range: 0-9.
Use Peer DNS	Obtain peer DNS automatically during PPP dialing. DNS is necessary when user visits domain name.

Table 3-4-1-4 PPPOE Parameters

#### 4.3.2.2. WLAN

This section explains how to set the related parameters for Wi-Fi network. LG280 supports 802.11 b/g/n, as AP or client mode.

The screenshot displays the WLAN configuration page with the following settings:

- WLAN**
  - Enable: ☒
  - Work Mode: AP (dropdown)
  - SSID Broadcast: ☒
  - AP Isolation: ☐
  - Radio Type: 802.11n(2.4GHz) (dropdown)
  - Channel: Auto (dropdown)
  - SSID: (text input)
  - BSSID: (text input)
  - Encryption Mode: No Encryption (dropdown)
  - Bandwidth: 20MHz (dropdown)
  - Max Client Number: 10 (text input)
- IP Setting**
  - Protocol: Static IP (dropdown)
  - IP Address: (text input)
  - Netmask: (text input)
  - DHCP Settings: (link)

Figure 3-4-1-5

**WLAN**

Enable ☒

Work Mode Client ▼ Scan

SSID

BSSID

Encryption Mode WPA-PSK/WPA2-PSK ▼

Cipher Auto ▼

Key

**IP Setting**

Protocol Static IP ▼

IP Address

Netmask 255.255.255.0

Gateway

Figure 3-4-1-6

WLAN Settings	
Item	Description
Enable	Enable/disable WLAN.
Work Mode	Select gateway's work mode. The options are "Client" or "AP".
BSSID	Fill in the MAC address of the access point. Either SSID or BSSID can be filled to join the network.
SSID	Fill in the SSID of the access point.
Client Mode	
Scan	Click "Scan" button to search the nearby access point.
Encryption Mode	Select encryption mode. The options are "No Encryption", "WEP Open System", "WEP Shared Key", "WPA-PSK", "WPA2-PSK", "WPA-PSK/WPA2-PSK", "WPA-Enterprise", "WPA2-Enterprise" and "WPA-Enterprise/WPA2-Enterprise".
Cipher	Select cipher. The options are "Auto", "AES", "TKIP" and "AES/TKIP".
Key	Fill the pre-shared key of WEP/WPA encryption.
XSupplicant Type	Select from "Peap", "Leap", "TLS" and "TTLS".
User	Fill the user of WPA/WPA2-Enterprise.
Anonymous Identity	Fill the anonymous identity of WPA/WPA2-Enterprise.
Phase2	Fill the phase2 of WPA/WPA2-Enterprise.
Public Server Certificate	The public server certificate used for verifying with WPA/WPA2-Enterprise access point.
AP Mode	
SSID Broadcast	When SSID broadcast is disabled, other wireless devices can't



	not find the SSID, and users have to enter the SSID manually to access to the wireless network.
AP Isolation	When AP isolation is enabled, all users which access to the AP are isolated without communication with each other.
Radio Type	Select Radio type. The options are " 802.11b (2.4 GHz)", "802.11g (2.4 GHz)", "802.11n (2.4 GHz)" " .
Channel	Select wireless channel. The options are "Auto", "1", "2"....."11".
Encryption Mode	Select encryption mode. The options are " No Encryption", "WEP Open System" , "WEP Shared Key", "WPA-PSK", "WPA2-PSK" and "WPA-PSK/WPA2-PSK".
Cipher	Select cipher. The options are " Auto", " AES", " TKIP" and "AES/TKIP".
Key	Fill the pre-shared key of WPA encryption. The default password is iotpassword.
Bandwidth	Select bandwidth. The options are "20MHz" and "40MHz".
Max Client Number	Set the maximum number of client to access when the gateway is configured as AP.
<b>IP Setting</b>	
Protocol	Set the protocol in wireless network.
IP Address	Set the IP address in wireless network.
Netmask	Set the netmask in wireless network.
Gateway	Set the gateway in wireless network.

Table 3-4-1-5 WLAN Parameters

Port

WLAN

Cellular

Loopback

< GoBack

SSID	Channel	Signal	Cipher	BSSID	Security	Frequency	
Vison Sensor_006602	Auto	-94dBm	Auto	24:e1:24:00:66:02	No Encryption	2462MHz	<div>Join Network</div>
Milesight_Test	Auto	-88dBm	AES	ec:26:ca:99:3a:a4	WPA-PSK/WPA2-PSK	2437MHz	<div>Join Network</div>

Figure 3-4-1-7

<b>Client Mode-Scan</b>	
SSID	Show SSID.
Channel	Show wireless channel.
Signal	Show wireless signal.
BSSID	Show the MAC address of the access point.
Security	Show the encryption mode.
Frequency	Show the frequency of radio.
Join Network	Click the button to join the wireless network.

Table 3-4-1-6 WLAN Scan Parameters

### 4.3.2.3. Cellular (Cellular Version Only)

This section explains how to set the related parameters for cellular network.

Cellular Setting

Enable

☒

Network Type

Auto

APN

Username

Password

Access Number

PIN Code

Authentication Type

None

Roaming

☒

Customize MTU

☒

MTU

1500

Enable IMS

☐

SMS Center

Figure 3-4-1-8

Connection Setting

☐

Enable NAT

☒

Restart When Dial-up failed

☐

ICMP Server

8.8.8.8

Secondary ICMP Server

223.5.5.5

ICMP Detection Max Retries

3

ICMP Detection Timeout

5

s

ICMP Detection Interval

15

s

SMS Settings

SMS Mode

PDU

Figure 3-4-1-9

General Settings	
Item	Description
Enable	Check the option to enable cellular feature.
Network Type	Select from "Auto" , "Auto 3G/4G" , "4G Only" and "3G Only". Auto: connect to the network with the strongest signal automatically. 4G Only: connect to 4G network only.

	And so on.
APN	Enter the Access Point Name for cellular dial-up connection provided by local ISP.
Username	Enter the username for cellular dial-up connection provided by local ISP.
Password	Enter the password for cellular dial-up connection provided by local ISP.
Access Number	Enter the dial-up center NO. For cellular dial-up connection provided by local ISP.
PIN Code	Enter a 4-8 characters PIN code to unlock the SIM.
Authentication Type	Select from "None", "PAP", "CHAP".
Roaming	Enable or disable roaming.
Customized MTU	Enable or disable to customize the maximum transmission units. When disabled, the device will use operator's MTU settings.
MTU	Set the maximum transmission units. Range: 68-1500.
Enable IMS	Enable or disable IMS function.
SMS Center	Enter the local SMS center number for storing, forwarding, converting and delivering SMS message.
Enable NAT	Enable or disable NAT function.
Restart When Dial-up failed	When this function is enabled, the gateway will restart automatically if the dial-up fails several times.
ICMP Server	Set the ICMP detection server's IP address.
Secondary ICMP Server	Set the secondary ICMP detection server's IP address.
ICMP Detection Max Retries	Set max number of retries when ICMP detection fails.
ICMP Detection Timeout	Set timeout of ICMP detection.
ICMP Detection Interval	Set interval of ICMP detection.
SMS Mode	Select SMS mode from "TEXT" and "PDU" .

Table 3-4-1-7 Cellular Parameters

Connection Setting	<input checked="" type="checkbox"/>
Connection Mode	Connect on Demand ▼
Redial Interval(s)	5
Max Idle Time(s)	60
Triggered by Call	<input type="checkbox"/>
Triggered by SMS	<input type="checkbox"/>

Figure 3-4-1-10

Item	Description
<b>Connection Mode</b>	
Connection Mode	Select from "Always Online" and "Connect on Demand".
Redial Interval(s)	Set the time interval between redials. Range: 0-3600.
Max Idle Time(s)	Set the maximum duration of the gateway when current link is under idle status. Range: 10-3600.
Triggered by Call	The gateway will switch from offline mode to cellular network mode automatically when it receives a call from the specific phone number.
Call Group	Select a call group for call trigger. Go to "System > General Settings > Phone" to set up phone group.
Triggered by SMS	The gateway will switch from offline mode to cellular network mode automatically when it receives a specific SMS from the specific mobile phone.
SMS Group	Select a SMS group for trigger. Go to "System > General Settings > Phone" to set up SMS group.
SMS Text	Fill in the SMS content for triggering.

Table 3-4-1-8 Cellular Parameters

#### 4.3.2.4. Loopback

Loopback interface is used for replacing gateway's ID as long as it is activated. When the interface is DOWN, the ID of the gateway has to be selected again which leads to long convergence time of OSPF. Therefore, Loopback interface is generally recommended as the ID of the gateway.

Loopback interface is a logic and virtual interface on gateway. Under default conditions, there's no loopback interface on gateway, but it can be created as required.

Port

WLAN

Cellular

Loopback

Loopback Address

IP Address

127.0.0.1

Netmask

255.0.0.0

Multiple IP Addresses

IP Address	Netmask	Operation
		<div>+</div>

Save

Figure 3-4-1-11

Loopback		
Item	Description	Default
IP Address	Unalterable	127.0.0.1
Netmask	Unalterable	255.0.0.0
Multiple IP Addresses	Apart from the IP above, user can configure other IP addresses.	Null

Table 3-4-1-9 Loopback Parameters

4.3.2.5. VLAN Trunk

LG280 gateway supports the Ethernet port working as VLAN Trunk client and be assigned a VLAN ID, which easy to traffic classification. When VLAN ID is set, port on “**Network**” > “**Interface**” > “**Port**” can be chosen as eth0.x with x being VLAN ID. VLAN Setting is blank by default, you can add a new VLAN label to certain interface by clicking 

+

.

VLAN Settings

Interface	VID	Operation
<div>eth 0</div>		<div>×</div>
		<div>+</div>

Save & Apply

Figure 3-4-1-12

VLAN Trunk	
Item	Description
Interface	Select the VLAN interface, it’s fixed as eth0.
VID	Set the label ID of the VLAN. Range: 1-4094.

Table 3-4-1-10 VLAN Trunk Parameters

4.3.3. Firewall

This section describes how to set the firewall parameters, including website block, ACL, DMZ, Port Mapping

and MAC Binding.

The firewall implements corresponding control of data flow at entry direction (from Internet to local area network) and exit direction (from local area network to Internet) according to the content features of packets, such as protocol style, source/destination IP address, etc. It ensures that the gateway operate in a safe environment and host in local area network.

4.3.3.1. Security

Security

ACL

DMZ

Port Mapping

MAC Binding

Website Blocking by URL Address

URL Address

http://

×

+

Website Blocking by Keyword

Keyword

×

+

Figure 3-4-2-1


Website Blocking	
URL Address	Enter the HTTP address which you want to block.
Keyword	You can block specific website by entering keyword. The maximum number of character allowed is 64.

Table 3-2-2-1 Security Parameters

4.3.3.2. ACL

Access control list, also called ACL, implements permission or prohibition of access for specified network traffic (such as the source IP address) by configuring a series of matching rules so as to filter the network interface traffic. When gateway receives packet, the field will be analyzed according to the ACL rule applied to the current interface. After the special packet is identified, the permission or prohibition of corresponding packet will be implemented according to preset strategy.

The data package matching rules defined by ACL can also be used by other functions requiring flow distinction.



www.pusr.com

- 54 -

pusr.com

Security **ACL** DMZ Port Mapping MAC Binding

**ACL Setting**

Default Filter Policy:

**Access Control List**

Type:

ID:

Action:

Protocol:

Source IP:

Source Wildcard Mask:

Destination IP:

Destination Wildcard Mask:

Description:

**Interface List**

Interface	In ACL	Out ACL	Operation
<input type="button" value="+"/>			

Figure 3-4-2-2

Item	Description
<b>ACL Setting</b>	
Default Filter Policy	Select from "Accept" and "Deny". The packets which are not included in the access control list will be processed by the default filter policy.
<b>Access Control List</b>	
Type	Select type from "Extended" and "Standard".
ID	User-defined ACL number. Range: 1-199.
Action	Select from "Permit" and "Deny".
Protocol	Select protocol from "ip", "icmp", "tcp", "udp", and "1-255".
Source IP	Source network address (leaving it blank means all).
Source Wildcard Mask	Wildcard mask of the source network address.
Destination IP	Destination network address (0.0.0.0 means all).
Destination Wildcard Mask	Wildcard mask of destination address.
Description	Fill in a description for the groups with the same ID.
ICMP Type	Enter the type of ICMP packet. Range: 0-255.
ICMP Code	Enter the code of ICMP packet. Range: 0-255.
Source Port Type	Select source port type, such as specified port, port range, etc.
Source Port	Set source port number. Range: 1-65535.
Start Source Port	Set start source port number. Range: 1-65535.

End Source Port	Set end source port number. Range: 1-65535.
Destination Port Type	Select destination port type, such as specified port, port range, etc.
Destination Port	Set destination port number. Range: 1-65535.
Start Destination Port	Set start destination port number. Range: 1-65535.
End Destination Port	Set end destination port number. Range: 1-65535.
More Details	Show information of the port.
<b>Interface List</b>	
Interface	Select network interface for access control.
In ACL	Select a rule for incoming traffic from ACL ID.
Out ACL	Select a rule for outgoing traffic from ACL ID.

Table 3-4-2-2 ACL Parameters

#### 4.3.3.3. DMZ

DMZ is a host within the internal network that has all ports exposed, except those forwarded ports in port mapping.

Figure 3-4-2-3

DMZ	
Item	Description
Enable	Enable or disable DMZ.
DMZ Host	Enter the IP address of the DMZ host on the internal network.
Source Address	Set the source IP address which can access to DMZ host. "0.0.0.0/0" means any address.

Table 3-4-2-3 DMZ Parameters

#### 4.3.3.4. Port Mapping (DNAT)

When external services are needed internally (for example, when a website is published externally), the external address initiates an active connection. And, the router or the gateway on the firewall receives the connection. Then it will convert the connection into the an internal connection. This conversion is called



DNAT, which is mainly used for external and interval services.

Click  to add a new port mapping rules.

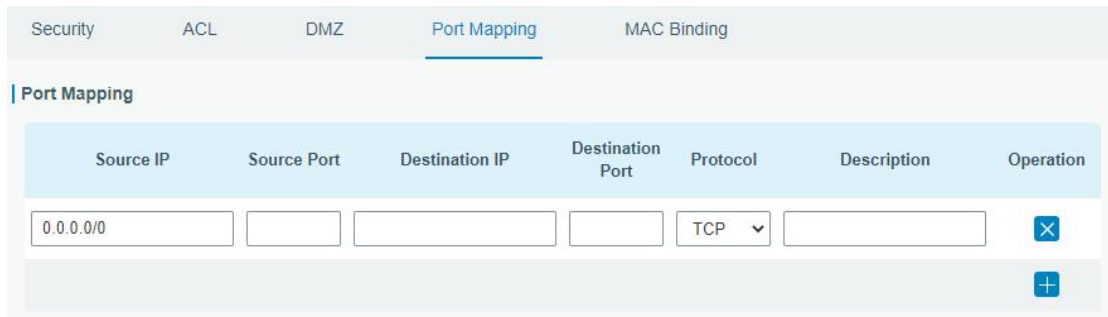


Figure 3-4-2-4

Port Mapping	
Item	Description
Source IP	Specify the host or network which can access local IP address. 0.0.0.0/0 means all.
Source Port	Enter the TCP or UDP port from which incoming packets are forwarded. Range: 1-65535.
Destination IP	Enter the IP address that packets are forwarded to after being received on the incoming interface.
Destination Port	Enter the TCP or UDP port that packets are forwarded to after being received on the incoming port(s). Range: 1-65535.
Protocol	Select from "TCP" and "UDP" as your application required.
Description	The description of this rule.

Table 3-4-2-4 Port Mapping Parameters

#### 4.3.3.5. MAC Binding

MAC Binding is used for specifying hosts by matching MAC addresses and IP addresses that are in the list of allowed outer network access.

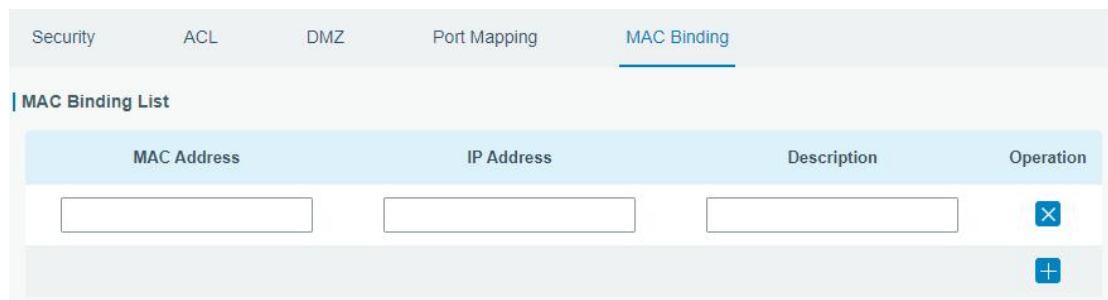


Figure 3-4-2-5

MAC Binding List	
Item	Description

MAC Address	Set the binding MAC address.
IP Address	Set the binding IP address.
Description	Fill in a description for convenience of recording the meaning of the binding rule for each piece of MAC-IP.

Table 3-4-2-5 MAC Binding Parameters

#### 4.3.4. DHCP

LG280 can be set as a DHCP server to distribute IP address when Wi-Fi work as AP mode.

Figure 3-4-3-1

DHCP Server		
Item	Description	Default
Enable	Enable or disable DHCP server.	Enable
Interface	Only wlan interface is allowed to distribute IP addresses.	wlan0
Start Address	Define the beginning of the pool of IP addresses which will be leased to DHCP clients.	192.168.1.100
End Address	Define the end of the pool of IP addresses which will be leased to DHCP clients.	192.168.1.199
Netmask	Define the subnet mask of IP address obtained by DHCP clients from DHCP server.	255.255.255.0
Lease Time	Set the lease time on which the client can use the IP	1440

(Min)	address obtained from DHCP server. Range: 1-10080.	
Primary DNS Server	Set the primary DNS server.	8.8.8.8
Secondary DNS Server	Set the secondary DNS server.	Null
Windows Name Server	Define the Windows Internet Naming Service obtained by DHCP clients from DHCP sever. Generally you can leave it blank.	Null
Static IP		
MAC Address	Set a static and specific MAC address for the DHCP client (it should be different from other MACs so as to avoid conflict).	Null
IP Address	Set a static and specific IP address for the DHCP client (it should be outside of the DHCP range).	Null

Table 3-4-3-1 DHCP Server Parameters

### 4.3.5. DDNS

Dynamic DNS (DDNS) is a method that automatically updates a name server in the Domain Name System, which allows user to alias a dynamic IP address to a static domain name.

DDNS serves as a client tool and needs to coordinate with DDNS server. Before starting configuration, user shall register on a website of proper domain name provider and apply for a domain name.

Figure 3-4-4-1

DDNS	
Item	Description
Name	Give the DDNS a descriptive name.
Interface	Set interface bundled with the DDNS.
Service Type	Select the DDNS service provider.
Username	Enter the username for DDNS register.
User ID	Enter User ID of the custom DDNS server.
Password	Enter the password for DDNS register.

Server	Enter the name of DDNS server.
Hostname	Enter the hostname for DDNS.
Append IP	Append your current IP to the DDNS server update path.

Table 3-4-4-1 DDNS Parameters

### 4.3.6. Link Failover

This section describes how to configure link failover strategies, such as VRRP strategies.

#### Configuration Steps

1. Define one or more SLA operations (ICMP probe).
2. Define one or more track objects to track the status of SLA operation.
3. Define applications associated with track objects, such as VRRP or static routing.

#### 4.3.6.1. SLA

SLA setting is used for configuring link probe method. The default probe type is ICMP.

Figure 3-4-5-1

SLA		
Item	Description	Default
ID	SLA index. Up to 10 SLA settings can be added. Range: 1-10.	1
Type	ICMP-ECHO is the default type to detect if the link is alive.	icmp-echo
Destination Address	The detected IP address.	8.8.8.8
Secondary Destination Address	The secondary detected IP address.	223.5.5.5
Data Size	User-defined data size. Range: 0-1000.	56
Interval (s)	User-defined detection interval. Range: 1-608400.	30
Timeout (ms)	User-defined timeout for response to determine ICMP detection failure. Range: 1-300000.	5000
Packet Loss Count	Define packet loss count in each SLA probe. SLA probe fails when the preset packet loss count is	5

	exceeded.	
Start Time	Detection start time; select from "Now" and blank character. Blank character means this SLA now detection doesn't start.	

Table 3-4-5-1 SLA Parameters

#### 4.3.6.2. Track

Track setting is designed for achieving linkage among SLA module, Track module and Application module. Track setting is located between application module and SLA module with main function of shielding the differences of various SLA modules and providing unified interfaces for application module.

##### Linkage between Track Module and SLA module

Once you complete the configuration, the linkage relationship between Track module and SLA module will be established. SLA module is used for detection of link status, network performance and notification of Track module. The detection results help track status change timely.

- For successful detection, the corresponding track item is Positive.
- For failed detection, the corresponding track item is Negative.

##### Linkage between Track Module and Application Module

After configuration, the linkage relationship between Track module and Application module will be established. When any change occurs in track item, a notification that requires corresponding treatment will be sent to Application module.

Currently, the application modules like VRRP and static routing can get linkage with track module.

If it sends an instant notification to Application module, the communication may be interrupted in some circumstances due to routing's failure like timely restoration or other reasons. Therefore, user can set up a period of time to delay notifying application module when the track item status changes.

ID	Type	SLA ID	Interface	Negative Delay(s)	Positive Delay(s)	Operation
1	sla	1	wlan0	0	1	

Figure 3-4-5-2

Item	Description	Default
Index	Track index. Up to 10 track settings can be configured. Range: 1-10.	1
Type	The options are "sla" and "interface".	SLA
SLA ID	Defined SLA ID.	1
Interface	Select the interface whose status will be detected.	cellular0

Negative Delay (s)	When interface is down or SLA probing fails, it will wait according to the time set here before actually changing its status to Down. Range: 0-180 (0 refers to immediate switching).	0
Positive Delay (s)	When failure recovery occurs, it will wait according to the time set here before actually changing its status to Up. Range: 0-180 (0 refers to immediate switching).	1

Table 3-4-5-2 Track Parameters

#### 4.3.6.3. WAN Failover

WAN failover refers to failover between Ethernet WAN interface and cellular interface. When service transmission can't be carried out normally due to malfunction of a certain interface or lack of bandwidth, the rate of flow can be switched to backup interface quickly. Then the backup interface will carry out service transmission and share network flow so as to improve reliability of communication of data equipment.

When link state of main interface is switched from up to down, system will have the pre-set delay works instead of switching to link of backup interface immediately. Only if the state of main interface is still down after delay, will the system switch to link of backup interface. Otherwise, system will remain unchanged.

Main Interface	Backup Interface	Startup Delay(s)	Up Delay(s)	Down Delay(s)	Track ID	Operation
Cellular 0	eth 0	30	0	0	1	[X] [ + ]

Figure 3-4-5-3

WAN Failover		
Parameters	Description	Default
Main Interface	Select a link interface as the main link.	--
Backup Interface	Select a link interface as the backup link.	--
Startup Delay (s)	Set how long to wait for the startup tracking detection policy to take effect. Range: 0-300.	30
Up Delay (s)	When the primary interface switches from failed detection to successful detection, switching can be delayed based on the set time. Range: 0-180 (0 refers to immediate switching)	0
Down Delay (s)	When the primary interface switches from successful detection to failed detection, switching can be delayed	0

	based on the set time. Range: 0-180 (0 refers to immediate switching).	
Track ID	Track detection, select the defined track ID.	--

Table 3-4-5-3 WAN Failover Parameters

### 4.3.7. VPN

Virtual Private Networks, also called VPNs, are used to securely connect two private networks together so that devices can connect from one network to the other network via secure channels.

LG280 supports DMVPN, IPsec, GRE, L2TP, PPTP, OpenVPN, as well as GRE over IPsec and L2TP over IPsec.

#### 4.3.7.1. DMVPN

A dynamic multi-point virtual private network (DMVPN), combining mGRE and IPsec, is a secure network that exchanges data between sites without passing traffic through an organization's headquarter VPN server or gateway.

Figure 3-4-6-1

Figure 3-4-6-2

DMVPN	
Item	Description

Enable	Enable or disable DMVPN.
Hub Address	The IP address or domain name of DMVPN Hub.
Local IP address	DMVPN local tunnel IP address.
GRE Hub IP Address	GRE Hub tunnel IP address.
GRE Local IP Address	GRE local tunnel IP address.
GRE Netmask	GRE local tunnel netmask.
GRE Key	GRE tunnel key.
Negotiation Mode	Select from "Main" and "Aggressive".
Authentication Algorithm	Select from "DES", "3DES", "AES128", "AES192" and "AES256".
Encryption Algorithm	Select from "MD5" and "SHA1".
DH Group	Select from "MODP768_1", "MODP1024_2" and "MODP1536_5".
Key	Enter the preshared key.
Local ID Type	Select from "Default", "ID", "FQDN", and "User FQDN"
IKE Life Time (s)	Set the lifetime in IKE negotiation. Range: 60-86400.
SA Algorithm	Select from "DES_MD5", "DES_SHA1", "3DES_MD5", "3DES_SHA1", "AES128_MD5", "AES128_SHA1", "AES192_MD5", "AES192_SHA1", "AES256_MD5" and "AES256_SHA1".
PFS Group	Select from "NULL", "MODP768_1", "MODP1024_2" and "MODP1536-5".
Life Time (s)	Set the lifetime of IPsec SA. Range: 60-86400.
DPD Interval Time (s)	Set DPD interval time
DPD Timeout (s)	Set DPD timeout.
Cisco Secret	Cisco Nhrp key.
NHRP Holdtime (s)	The holdtime of Nhrp protocol.


Table 3-4-6-1 DMVPN Parameters

#### 4.3.7.2. IPsec

IPsec is especially useful for implementing virtual private networks and for remote user access through dial-up connection to private networks. A big advantage of IPsec is that security arrangements can be handled without requiring changes to individual user computers.

IPsec provides three choices of security service: Authentication Header (AH), Encapsulating Security Payload (ESP), and Internet Key Exchange (IKE). AH essentially allows authentication of the senders' data. ESP supports both authentication of the sender and data encryption. IKE is used for cipher code exchange. All of them can protect one and more data flows between hosts, between host and gateway, and between gateways.



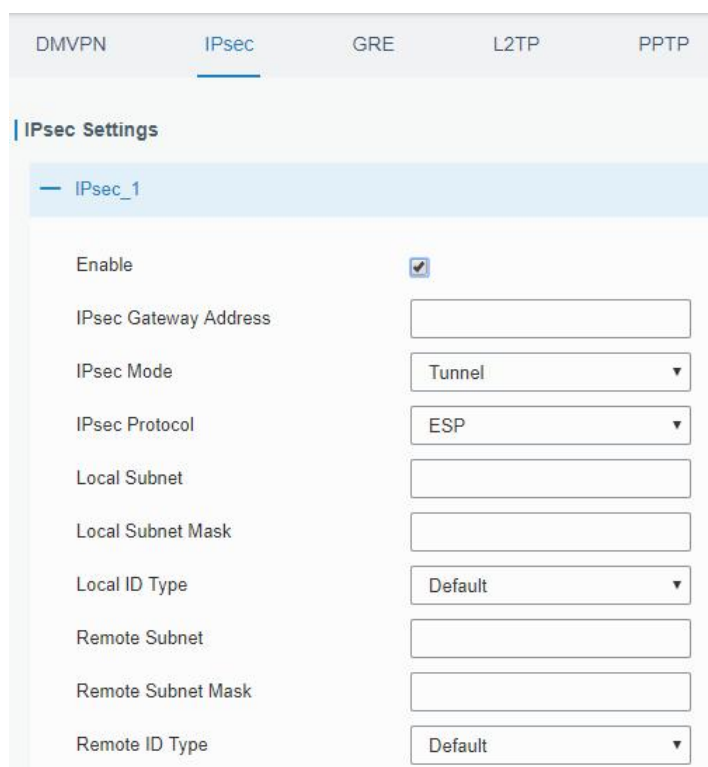

DMVPN IPsec GRE L2TP PPTP

**IPsec Settings**

— IPsec\_1

Enable ☒

IPsec Gateway Address

IPsec Mode Tunnel ▼

IPsec Protocol ESP ▼

Local Subnet

Local Subnet Mask

Local ID Type Default ▼

Remote Subnet

Remote Subnet Mask

Remote ID Type Default ▼

Figure 3-4-6-3

IPsec	
Item	Description
Enable	Enable IPsec tunnel. A maximum of 3 tunnels is allowed.
IPsec Gateway Address	Enter the IP address or domain name of remote IPsec server.
IPsec Mode	Select from "Tunnel" and "Transport".
IPsec Protocol	Select from "ESP" and "AH".
Local Subnet	Enter the local subnet IP address that IPsec protects.
Local Subnet Netmask	Enter the local netmask that IPsec protects.
Local ID Type	Select from "Default", "ID", "FQDN", and "User FQDN".
Remote Subnet	Enter the remote subnet IP address that IPsec protects.
Remote Subnet Mask	Enter the remote netmask that IPsec protects.
Remote ID type	Select from "Default", "ID", "FQDN", and "User FQDN".

Table 3-4-6-2 IPsec Parameters

<b>IKE Parameter</b>	<input checked="" type="checkbox"/>
IKE Version	IKEv1 ▼
Negotiation Mode	Main ▼
Encryption Algorithm	DES ▼
Authentication Algorithm	MD5 ▼
DH Group	MODP768-1 ▼
Local Authentication	PSK ▼
Local Secrets	<input type="text"/>
XAUTH	<input type="checkbox"/>
Lifetime(s)	10800
<b>SA Parameter</b>	<input checked="" type="checkbox"/>
SA Algorithm	DES-MD5 ▼
PFS Group	NULL ▼
Lifetime(s)	3600
DPD Time Interval(s)	30
DPD Timeout(s)	150
<b>IPsec Advanced</b>	<input checked="" type="checkbox"/>
Enable Compression	<input type="checkbox"/>
VPN Over IPsec Type	NONE ▼

Figure 3-4-6-4

IKE Parameter	
Item	Description
IKE Version	Select from "IKEv1" and "IKEv2".
Negotiation Mode	Select from "Main" and "Aggressive".
Encryption Algorithm	Select from "DES", "3DES", "AES128", "AES192" and "AES256".
Authentication Algorithm	Select from "MD5" and "SHA1".
DH Group	Select from "MODP768_1", "MODP1024_2" and "MODP1536_5".
Local Authentication	Select from "PSK" and "CA".
Local Secrets	Enter the preshared key.
XAUTH	Enter XAUTH username and password after XAUTH is enabled.
Lifetime (s)	Set the lifetime in IKE negotiation. Range: 60-86400.
SA Parameter	
SA Algorithm	Select from "DES_MD5", "DES_SHA1", "3DES_MD5", "3DES_SHA1", "AES128_MD5", "AES128_SHA1", "AES192_MD5", "AES192_SHA1", "AES256_MD5" and "AES256_SHA1".

PFS Group	Select from "NULL", "MODP768_1" , "MODP1024_2" and "MODP1536_5".
Lifetime (s)	Set the lifetime of IPsec SA. Range: 60-86400.
DPD Interval Time(s)	Set DPD interval time to detect if the remote side fails.
DPD Timeout(s)	Set DPD timeout. Range: 10-3600.
<b>IPsec Advanced</b>	
Enable Compression	The head of IP packet will be compressed after it's enabled.
VPN Over IPsec Type	Select from "NONE", "GRE" and "L2TP" to enable VPN over IPsec function.

Table 3-4-6-3 IPsec Parameters

#### 4.3.7.3. GRE

Generic Routing Encapsulation (GRE) is a protocol that encapsulates packets in order to route other protocols over IP networks. It's a tunneling technology that provides a channel through which encapsulated data message can be transmitted and encapsulation and decapsulation can be realized at both ends.

In the following circumstances the GRE tunnel transmission can be applied:

- GRE tunnel can transmit multicast data packets as if it were a true network interface. Single use of IPSec cannot achieve the encryption of multicast.
- A certain protocol adopted cannot be routed.
- A network of different IP addresses shall be required to connect other two similar networks.

Figure 3-4-6-5

GRE	
Item	Description
Enable	Check to enable GRE function.
Remote IP Address	Enter the real remote IP address of GRE tunnel.
Local IP Address	Set the local IP address.
Local Virtual IP Address	Set the local tunnel IP address of GRE tunnel.
Netmask	Set the local netmask.
Peer Virtual IP Address	Enter remote tunnel IP address of GRE tunnel.
Global Traffic Forwarding	All the data traffic will be sent out via GRE tunnel when this function is enabled.
Remote Subnet	Enter the remote subnet IP address of GRE tunnel.
Remote Netmask	Enter the remote netmask of GRE tunnel.
MTU	Enter the maximum transmission unit. Range: 64-1500.
Key	Set GRE tunnel key.
Enable NAT	Enable NAT traversal function.

Table 3-4-6-4 GRE Parameters

#### 4.3.7.4. L2TP

Layer Two Tunneling Protocol (L2TP) is an extension of the Point-to-Point Tunneling Protocol (PPTP) used by an Internet service provider (ISP) to enable the operation of a virtual private network (VPN) over the Internet.

The screenshot displays the L2TP configuration page for 'L2TP\_1'. The interface includes tabs for DMVPN, IPsec, GRE, L2TP (selected), and PPTP. The configuration fields are as follows:

- Enable:** Checked (checkbox).
- Remote IP Address:** Empty text field.
- Username:** Empty text field.
- Password:** Empty text field.
- Authentication:** Dropdown menu set to 'Auto'.
- Global Traffic Forwarding:** Unchecked (checkbox).
- Remote Subnet:** Text field containing '10.5.22.0'.
- Remote Subnet Mask:** Text field containing '255.255.255.0'.
- Key:** Empty text field.
- Use L2TP Peer DNS:** Checked (checkbox).

Figure 3-4-6-6

Item	Description
Enable	Check to enable L2TP function.
Remote IP Address	Enter the public IP address or domain name of L2TP server.
Username	Enter the username that L2TP server provides.
Password	Enter the password that L2TP server provides.
Authentication	Select from "Auto", "PAP", "CHAP", "MS-CHAPv1" and "MS-CHAPv2".
Global Traffic Forwarding	All of the data traffic will be sent out via L2TP tunnel after this function is enabled.
Remote Subnet	Enter the remote IP address that L2TP protects.
Remote Subnet Mask	Enter the remote netmask that L2TP protects.
Key	Enter the password of L2TP tunnel.
Use L2TP Peer DNS	Enable to use the DNS address of peer L2TP server .

Table 3-4-6-5 L2TP Parameters

Advanced Settings	<input checked="" type="checkbox"/>
Local IP Address	<input type="text"/>
Peer IP Address	<input type="text"/>
Enable NAT	<input checked="" type="checkbox"/>
Enable MPPE	<input checked="" type="checkbox"/>
Address/Control Compression	<input type="checkbox"/>
Protocol Field Compression	<input type="checkbox"/>
Asyncmap Value	<input type="text" value="ffffff"/>
MRU	<input type="text" value="1500"/>
MTU	<input type="text" value="1500"/>
Link Detection Interval(s)	<input type="text" value="60"/>
Max Retries	<input type="text" value="0"/>
Expert Options	<input type="text"/>

Figure 3-4-6-7

Advanced Settings	
Item	Description
Local IP Address	Set tunnel IP address of L2TP client. Client will obtain tunnel IP address automatically from the server when it's null.
Peer IP Address	Enter tunnel IP address of L2TP server.
Enable NAT	Enable NAT traversal function.
Enable MPPE	Enable MPPE encryption.

Address/Control Compression	For PPP initialization. User can keep the default option.
Protocol Compression Field	For PPP initialization. User can keep the default option.
Asyncmap Value	One of the PPP protocol initialization strings. User can keep the default value. Range: 0-ffffff.
MRU	Set the maximum receive unit. Range: 64-1500.
MTU	Set the maximum transmission unit. Range: 64-1500
Link Detection Interval (s)	Set the link detection interval time to ensure tunnel connection. Range: 0-600.
Max Retries	Set the maximum times of retry to detect the L2TP connection failure. Range: 0-10.
Expert Options	User can enter some other PPP initialization strings in this field and separate the strings with blank space.

Table 3-4-6-6 L2TP Parameters

#### 4.3.7.5. PPTP

Point-to-Point Tunneling Protocol (PPTP) is a protocol that allows corporations to extend their own corporate network through private "tunnels" over the public Internet. Effectively, a corporation uses a wide-area network as a single large local area network.

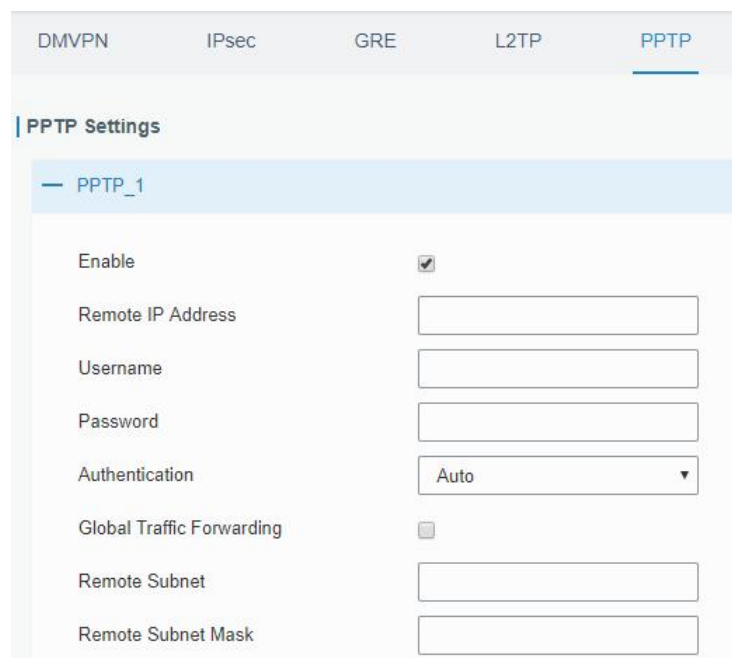


Figure 3-4-6-8

PPTP	
Item	Description
Enable	Enable PPTP client. A maximum of 3 tunnels is allowed.
Remote IP Address	Enter the public IP address or domain name of PPTP

	server.
Username	Enter the username that PPTP server provides.
Password	Enter the password that PPTP server provides.
Authentication	Select from "Auto", "PAP", "CHAP", "MS-CHAPv1", and "MS-CHAPv2".
Global Traffic Forwarding	All of the data traffic will be sent out via PPTP tunnel once enable this function.
Remote Subnet	Set the peer subnet of PPTP.
Remote Subnet Mask	Set the netmask of peer PPTP server.

Table 3-4-6-7 PPTP Parameters

Advanced Settings	<input checked="" type="checkbox"/>
Local IP Address	<input type="text"/>
Peer IP Address	<input type="text"/>
Enable NAT	<input checked="" type="checkbox"/>
Enable MPPE	<input checked="" type="checkbox"/>
Address/Control Compression	<input type="checkbox"/>
Protocol Field Compression	<input type="checkbox"/>
Asyncmap Value	<input type="text" value="ffffff"/>
MRU	<input type="text" value="1500"/>
MTU	<input type="text" value="1500"/>
Link Detection Interval(s)	<input type="text" value="60"/>
Max Retries	<input type="text" value="0"/>
Expert Options	<input type="text"/>

Figure 3-4-6-9

PPTP Advanced Settings	
Item	Description
Local IP Address	Set IP address of PPTP client.
Peer IP Address	Enter tunnel IP address of PPTP server.
Enable NAT	Enable the NAT faction of PPTP.
Enable MPPE	Enable MPPE encryption.
Address/Control Compression	For PPP initialization. User can keep the default option.
Protocol Field Compression	For PPP initialization. User can keep the default option.
Asyncmap Value	One of the PPP protocol initialization strings. User can keep the default value. Range: 0-ffffff.

MRU	Enter the maximum receive unit. Range: 0-1500.
MTU	Enter the maximum transmission unit. Range: 0-1500.
Link Detection Interval (s)	Set the link detection interval time to ensure tunnel connection. Range: 0-600.
Max Retries	Set the maximum times of retrying to detect the PPTP connection failure. Range: 0-10.
Expert Options	User can enter some other PPP initialization strings in this field and separate the strings with blank space.

Table 3-4-6-8 PPTP Parameters

#### 4.3.7.6. OpenVPN Client

OpenVPN is an open source virtual private network (VPN) product that offers a simplified security framework, modular network design, and cross-platform portability. LG280 supports running at most 3 OpenVPN clients at the same time. You can import the ovpn file directly or configure the parameters on this page to set clients.

Figure 3-4-6-10

OpenVPN Client - File Configuration	
Item	Description
Browse	Click to browse the client configuration ovpn format file including the settings and certificate contents. Please refer to the client configuration file according to sample: <b>client.conf</b>
Edit	Click to edit the imported file.
Export	Export the server configuration file.
Delete	Click to delete the configuration file.

Table 3-4-6-9 OpenVPN Client Parameters



Configuration Method: Page Configuration

Protocol: UDP

Remote IP Address:

Port: 1194

Interface: tun

Authentication: None

Local Tunnel IP:

Remote Tunnel IP:

Enable NAT: ☒

Compression: LZO

Link Detection Interval(s): 60

Link Detection Timeout(s): 300

Cipher: None

MTU: 1500

Max Frame Size: 1500

Verbose Level: ERROR

Expert Options:

Local Route:

Subnet: Subnet Mask: Operation:

Figure 3-4-6-10

OpenVPN Client - Page Configuration		
Item	Description	
Protocol	Select a transport protocol used by connecting UDP and TCP.	
Remote IP Address	Enter remote OpenVPN server's IP address or domain name.	
Port	Enter the TCP/UCP service number of remote OpenVPN server. Range: 1-65535.	
Interface	Select virtual VPN network interface type from TUN and TAP. TUN devices encapsulate IPv4 or IPv6 (OSI Layer 3) while TAP devices encapsulate Ethernet 802.3 (OSI Layer 2).	
Authentication Type	<p>Select authentication type used to secure data sessions.</p> <p>Pre-shared: use the same secret key as server to complete the authentication. After selecting, go to Network &gt; VPN &gt; Certifications page to import a static.key to PSK field.</p> <p>Username/Password: use username/password which is preset in server side to complete the authentication.</p> <p>X.509 cert: use X.509 type certificate to complete the authentication. After selecting, go to Network &gt; VPN &gt; Certifications page to import CA certificate, client certificate and client private key to corresponding fields.</p> <p>X.509 cert + user: use both username/password and X.509 cert authentication type.</p>	
Local Virtual IP	Set local tunnel address when authentication type is None or Pre-shared.	
Remote Virtual IP	Set remote tunnel address when authentication type is None or Pre-shared.	
Global	Traffic	All the data traffic will be sent out via OpenVPN tunnel when this

Forwarding		function is enabled.
Enable Authentication	TLS	<p>Disable or enable TLS authentication when authentication type is X.509 cert. After being enabled, go to Network &gt; VPN &gt; Certifications page to import a ta.key to TA field.</p> <p>Note: this option only supports tls-auth. For tls-crypt, please add this format string on expert option: tls-crypt /etc/openvpn/openvpn-client1-ta.key</p>
Compression		Select to enable or disable LZO to compress data.
Link Detection Interval (s)		Set link detection interval time to ensure tunnel connection. If this is set on both server and client, the value pushed from server will override the client local values. Range: 10-1800 s.
Link Detection Timeout (s)		OpenVPN will be reestablished after timeout. If this is set on both server and client, the value pushed from server will override the client local values. Range: 60-3600 s.
Cipher		Select from NONE, BF-CBC, DES-CBC, DES-EDE3-CBC, AES-128-CBC, AES-192-CBC and AES-256-CBC.
MTU		Enter the maximum transmission unit. Range: 128-1500.
Max Frame Size		Set the maximum frame size. Range: 128-1500.
Verbose Level		Select from ERROR, WARNING, NOTICE and DEBUG.
Expert Options		<p>User can enter some initialization strings in this field and separate the strings with semicolon.</p> <p>Example: ncp-ciphers AES-128-GCM; key direction 1</p>
Local Route		
Subnet		Set the local route's IP address.
Subnet Mask		Set the local route's netmask.

Table 3-4-6-9 OpenVPN Client Parameters

#### 4.3.7.7. OpenVPN Server

LG280 supports OpenVPN server to create secure point-to-point or site-to-site connections in routed or bridged configurations and remote access facilities. You can import the ovpn file directly or configure the parameters on this page to set this server.

OpenVPN Server Settings

Enable ☒

Configuration Method File Configuration

Configuration File  Browse Import Export Delete

Figure 3-4-6-12

#### OpenVPN Server - File Configuration

Item	Description
------	-------------

Browse	Click to browse the server configuration ovpn format file including the settings and certificate contents. Please refer to the server configuration file according to sample: server.conf
Edit	Click to edit the imported file.
Export	Export the server configuration file.
Delete	Click to delete the configuration file.

Table 3-4-6-11 OpenVPN Server Parameters

**OpenVPN Server Settings**

Enable	<input checked="" type="checkbox"/>
Configuration Method	Page Configuration ▼
Protocol	UDP ▼
Port	1194
Listening IP	
Interface	tun ▼
Authentication	None ▼
Local Virtual IP	
Remote Virtual IP	
Enable NAT	<input checked="" type="checkbox"/>
Compression	LZO ▼
Link Detection Interval	60
Link Detection Timeout	150
Cipher	None ▼
MTU	1500
Max Frame Size	1500
Verbose Level	ERROR ▼
Expert Options	

Figure 3-4-6-11

Account			
Username	Password	Operation	
		+	

Local Route			
Subnet	Netmask	Operation	
		+	

Client Subnet			
Name	Subnet	Netmask	Operation
			+

Figure 3-4-6-12

OpenVPN Server - Page Configuration	
Item	Description
Protocol	Select a transport protocol used by connection from UDP and TCP.
Listening IP	Enter the local hostname or IP address for bind. If left blank, OpenVPN server will bind to all interfaces.
Port	Enter the TCP/UCP service number for OpenVPN client connection. Range: 1-65535.
Interface	Select virtual VPN network interface type from TUN and TAP. TUN devices encapsulate IPv4 or IPv6 (OSI Layer 3) while TAP devices encapsulate Ethernet 802.3 (OSI Layer 2).
Authentication Type	<p>Select authentication type used to secure data sessions.</p> <p>Pre-shared: use the same secret key as server to complete the authentication. After select, go to Network &gt; VPN &gt; Certifications page to import a static.key to PSK field.</p> <p>Username/Password: use username/password which is preset in server side to complete the authentication.</p> <p>X.509 cert: use X.509 type certificate to complete the authentication. After select, go to Network &gt; VPN &gt; Certifications page to import CA certificate, client certificate and client private key to corresponding fields.</p> <p>X.509 cert + user: use both username/password and X.509 cert authentication type.</p>
Local Virtual IP	Set local tunnel address when authentication type is None or Pre-shared.
Remote Virtual IP	Set remote tunnel address when authentication type is None or Pre-shared.
Client Subnet	Define an IP address pool for openVPN client.
Client Netmask	Set the client subnet netmask to limit the IP address range.
Renegotiation Interval	Renegotiate data channel key after this interval. 0 means disable.
Max Clients	<p>Limit server to a maximum of concurrent clients, range: 1-20.</p> <p>Note: please adjust log severity to Info if you need to connect many</p>

	clients.
Enable CRL	Enable or disable CRL verify.
Enable Client to Client	When enabled, openVPN clients can communicate with each other.
Enable Dup Client	Allow multiple clients to connect with the same common name or certification.
Enable TLS Authentication	<p>Disable or enable TLS authentication when authentication type is X.509 cert. After being enabled, go to Network &gt; VPN &gt; Certifications page to import a ta.key to TA field.</p> <p>Note: this option only supports tls-auth. For tls-crypt, please add this format string on expert option: <code>tls-crypt /etc/openvpn/openvpn-client1-ta.key</code></p>
Compression	Select to enable or disable LZO to compress data.
Link Detection Interval (s)	Set link detection interval time to ensure tunnel connection. If this is set on both server and client, the value pushed from server will override the client local values. Range: 10-1800 s.
Link Detection Timeout (s)	OpenVPN will be reestablished after timeout. If this is set on both server and client, the value pushed from server will override the client local values. Range: 60-3600 s.
Cipher	Select from NONE, BF-CBC, DES-CBC, DES-EDE3-CBC, AES-128-CBC, AES-192-CBC and AES-256-CBC.
MTU	Enter the maximum transmission unit. Range: 64-1500.
Max Frame Size	Set the maximum frame size. Range: 64-1500.
Verbose Level	Select from ERROR, WARNING, NOTICE and DEBUG.
Expert Options	<p>User can enter some initialization strings in this field and separate the strings with semicolon.</p> <p>Example: <code>ncp-ciphers AES-128-GCM; key direction 1</code></p>
<b>Account</b>	
Username & Password	Set username and password for OpenVPN client when authentication type is username/password.
<b>Local Route</b>	
Subnet	Set the local route's IP address.
Subnet Mask	Set the local route's netmask.
<b>Client Subnet</b>	
Name	Set the name as OpenVPN client certificate common name.
Subnet	Set the subnet of OpenVPN client.
Subnet Mask	Set the subnet netmask of OpenVPN client.

Table 3-4-6-10 OpenVPN Server Parameters

#### 4.3.7.8. Certifications

When working as OpenVPN server, OpenVPN client or IPsec Server, user can import/export necessary

certificate and key files to this page according to the authentication types.

OpenVPN Client

OpenVPN client\_1

CA	<input type="text"/>	Browse	Import	Export	Delete
Public Key	<input type="text"/>	Browse	Import	Export	Delete
Private Key	<input type="text"/>	Browse	Import	Export	Delete
TA	<input type="text"/>	Browse	Import	Export	Delete
Preshared Key	<input type="text"/>	Browse	Import	Export	Delete
PKCS12	<input type="text"/>	Browse	Import	Export	Delete

OpenVPN client\_2

OpenVPN client\_3

Figure 3-4-6-13

OpenVPN Server

OpenVPN Server

CA	<input type="text"/>	Browse	Import	Export	Delete
Public Key	<input type="text"/>	Browse	Import	Export	Delete
Private Key	<input type="text"/>	Browse	Import	Export	Delete
DH	<input type="text"/>	Browse	Import	Export	Delete
TA	<input type="text"/>	Browse	Import	Export	Delete
CRL	<input type="text"/>	Browse	Import	Export	Delete
Preshared Key	<input type="text"/>	Browse	Import	Export	Delete

Figure 3-4-6-14

IPsec

IPsec\_1

CA	<input type="text"/>	Browse	Import	Export	Delete
Client Key	<input type="text"/>	Browse	Import	Export	Delete
Server Key	<input type="text"/>	Browse	Import	Export	Delete
Private Key	<input type="text"/>	Browse	Import	Export	Delete
CRL	<input type="text"/>	Browse	Import	Export	Delete

Figure 3-4-6-15

## 4.4. System

This section describes how to configure general settings, such as administration account, access service, system time, common user management, SNMP, event alarms, etc.

## 4.4.1. General Settings

### 4.4.1.1. General

General settings include system info, access service and HTTPS certificates.

General	System Time	SMTP	Phone	Email															
<b>System</b> Hostname: <input type="text" value="GATEWAY"/> Web Login Timeout(s): <input type="text" value="1800"/>																			
<b>Access Service</b> <table border="1"> <thead> <tr> <th>Enable</th> <th>Service</th> <th>Port</th> </tr> </thead> <tbody> <tr> <td><input checked="" type="checkbox"/></td> <td>HTTP</td> <td><input type="text" value="80"/></td> </tr> <tr> <td><input checked="" type="checkbox"/></td> <td>HTTPS</td> <td><input type="text" value="443"/></td> </tr> <tr> <td><input type="checkbox"/></td> <td>TELNET</td> <td><input type="text" value="23"/></td> </tr> <tr> <td><input checked="" type="checkbox"/></td> <td>SSH</td> <td><input type="text" value="22"/></td> </tr> </tbody> </table>					Enable	Service	Port	<input checked="" type="checkbox"/>	HTTP	<input type="text" value="80"/>	<input checked="" type="checkbox"/>	HTTPS	<input type="text" value="443"/>	<input type="checkbox"/>	TELNET	<input type="text" value="23"/>	<input checked="" type="checkbox"/>	SSH	<input type="text" value="22"/>
Enable	Service	Port																	
<input checked="" type="checkbox"/>	HTTP	<input type="text" value="80"/>																	
<input checked="" type="checkbox"/>	HTTPS	<input type="text" value="443"/>																	
<input type="checkbox"/>	TELNET	<input type="text" value="23"/>																	
<input checked="" type="checkbox"/>	SSH	<input type="text" value="22"/>																	
<b>HTTPS Certificates</b> Certificate: <input type="text" value="https.crt"/> <input type="button" value="Browse"/> <input type="button" value="Import"/> <input type="button" value="Export"/> <input type="button" value="Delete"/> Key: <input type="text" value="https.key"/> <input type="button" value="Browse"/> <input type="button" value="Import"/> <input type="button" value="Export"/> <input type="button" value="Delete"/>																			

Figure 3-5-1-1

General		
Item	Description	Default
System		
Hostname	User-defined gateway name, needs to start with a letter.	GATEWAY
Web Login Timeout (s)	You need to log in again if it times out. Range: 100-3600.	1800
Access Service		
Port	Set port number of the services. Range: 1-65535.	--
HTTP	Users can log in the device locally via HTTP to access and control it through Web after the option is checked.	80
HTTPS	Users can log in the device locally and remotely via HTTPS to access and control it through Web after option is checked.	443
TELNET	Users can log in the device locally and remotely via TELNET to access and control it through Web after option is checked.	23

SSH	Users can log in the device locally and remotely via SSH after the option is checked.	22
HTTPS Certificates		
Certificate	Click "Browse" button, choose certificate file on the PC, and then click "Import" button to upload the file into gateway. Click "Export" button will export the file to the PC. Click "Delete" button will delete the file.	--
Key	Click "Browse" button, choose key file on the PC, and then click "Import" button to upload the file into gateway. Click "Export" button will export file to the PC. Click "Delete" button will delete the file.	--

Table 3-5-1-1 General Setting Parameters

#### 4.4.1.2. System Time

This section explains how to set the system time including time zone and time synchronization type.

**Note:** to ensure that the gateway runs with the correct time, it's recommended that you set the system time when configuring the gateway.

Figure 3-5-1-2

System Time	
Item	Description
Current Time	Show the current system time.
Time Zone	Click the drop down list to select the time zone you are in.
Sync Type	Click the drop down list to select the time synchronization type. Sync with Browser: Synchronize time with browser. Sync with NTP Server: Synchronize time with NTP Server. Set up Manually: configure the time manually.
Sync with NTP Server	
NTP Server Address	Set NTP server address (domain name/IP).
Enable NTP Server	After checked, NTP client on the network can achieve time synchronization with gateway.



Table 3-5-1-2 System Time Parameters

#### 4.4.1.3. SMTP

SMTP, short for Simple Mail Transfer Protocol, is a TCP/IP protocol used in sending and receiving e-mail. This section describes how to configure email settings.

**SMTP Client Settings**

Enable ☒

Email Address

Username

Password

SMTP Server Address

Port

Enable TLS ☐

**Save** **Test**

Figure 3-5-1-3

SMTP	
Item	Description
SMTP Client Settings	
Enable	Enable or disable SMTP client function.
Email Address	Enter the sender's email address.
Username	Enter the sender's email username.
Password	Enter the sender's email password.
SMTP Server Address	Enter SMTP server's domain name.
Port	Enter SMTP server port. Range: 1-65535.
Enable TLS	Enable or disable TLS encryption.

Table 3-5-1-3 SMTP Setting

#### 4.4.1.4. Phone

Phone settings involve in call/SMS trigger and SMS alarm for events. This is only applied to gateway with cellular feature.

GeneralSystem TimeSMTPPhoneEmail

Phone Number List

Name	Number	Operation
<input type="text" value="List1"/>	<input type="text" value="654321;123456"/>	<div><div>✕</div><div>+</div></div>

Save

Figure 3-5-1-4

Phone	
Item	Description
Phone Number List	
Name	Set phone group name.
Number	Enter the telephone number. Digits, "+" and "-" are allowed. You can divide multiple numbers by ";" .

Table 3-5-1-4 Phone Settings

4.4.1.5. Email

Email settings involve email alarm for events.

GeneralSystem TimeSMTPPhoneEmail

Email List

Name	Email Address	Operation
<input type="text" value="list1"/>	<input type="text" value="sam@user.com;hot@gmail.com"/>	<div><div>✕</div><div>+</div></div>

Save

Figure 3-5-1-5

Email	
Item	Description
Email List	
Name	Set Email group name.
Email Address	Enter the Email address. You can divide multiple Email addresses by ";" .

Table 3-5-1-5 Email Settings

4.4.2. User Management

4.4.2.1. Account

Here you can change the login username and password of the administrator.

**Note:** it is strongly recommended that you modify them for the sake of security.

The screenshot shows a web interface with two tabs: 'Account' and 'User Management'. The 'Account' tab is selected. Below it is a section titled 'Change Account Info'. This section contains four labeled input fields: 'Username' (with the text 'admin'), 'Old Password', 'New Password', and 'Confirm New Password'. At the bottom of this section is a blue 'Save' button.

Figure 3-5-2-1

Account	
Item	Description
Username	Enter a new username. You can use characters such as a-z, 0-9, "_", "-". The first character can't be a digit.
Old Password	Enter the old password.
New Password	Enter a new password. You can use any ASCII characters except blank.
Confirm New Password	Enter the new password again.

Table 3-5-2-1 Account Information

#### 4.4.2.2. User Management

This section describes how to create common user accounts.

The common user permission includes Read-Only and Read-Write.

The screenshot shows the 'User Management' tab selected. Below it is a section titled 'User List'. It contains a table with the following columns: 'Username', 'Password', 'Permission', and 'Operation'. There are two rows of user data: one for 'steve' with 'Read-Write' permission, and one for 'test' with 'Read-Only' permission. Each row has a blue 'X' icon in the 'Operation' column. At the bottom right of the table is a blue '+' icon.

Figure 3-5-2-2

User Management	
Item	Description
Username	Enter a new username. You can use characters such as a-z, 0-9, "_", "-". The first character can't be a digit.
Password	Set password. You can use any ASCII characters except blank.
Permission	Select user permission from "Read-Only" and "Read-

	<p>Write” .</p> <p>Read-Only: users can only view the configuration of gateway in this level.</p> <p>Read-Write: users can view and set the configuration of gateway in this level.</p>
--	---

Table 3-5-2-2 User Management

### 4.4.3. SNMP

SNMP is widely used in **network management** for **network monitoring**. SNMP exposes management data with variables form in managed system. The system is organized in a **management information base** (MIB) which describes the system status and configuration. These variables can be remotely queried by managing applications.

Configuring SNMP in networking, NMS, and a management program of SNMP should be set up at the Manager.

Configuration steps are listed as below for achieving query from NMS:

- 1.Enable SNMP setting.
- 2.Download MIB file and load it into NMS.
- 3.Configure MIB View.
- 4.Configure VCAM.

#### 4.4.3.1. SNMP

LG280 supports SNMPv1, SNMPv2c and SNMPv3 version. SNMPv1 and SNMPv2c employ community name authentication. SNMPv3 employs authentication encryption by username and password.

Figure 3-5-3-1

SNMP Settings	
Item	Description
Enable	Enable or disable SNMP function.
Port	Set SNMP listened port. Range: 1-65535. The default port is 161.
System Name	Fill in the system name to represent the gateway.
SNMP Version	Select SNMP version; support SNMP v1/v2c/v3.
Location Information	Fill in the location information.
Contact Information	Fill in the contact information.

Table 3-5-3-1 SNMP Parameters

#### 4.4.3.2. MIB View

This section explains how to configure MIB view for the objects.

View Name	View Filter	View OID	Operation
All	Included	1	X
system	Included	1.3.6.1.2.1.1	X

Figure 3-5-3-2

MIB View	
Item	Description
View Name	Set MIB view's name.
View Filter	Select from "Included" and "Excluded".
View OID	Enter the OID number.
Included	You can query all nodes within the specified MIB node.
Excluded	You can query all nodes except for the specified MIB node.

Table 3-5-3-2 MIB View Parameters

#### 4.4.3.3. VACM

This section describes how to configure VACM parameters.

Figure 3-5-3-3

VACM	
Item	Description
SNMP v1 & v2 User List	
Community	Set the community name.
Permission	Select from "Read-Only" and "Read-Write".
MIB View	Select an MIB view to set permissions from the MIB view list.
Network	The IP address and bits of the external network accessing the MIB view.
Read-Write	The permission of the specified MIB node is read and write.
Read-Only	The permission of the specified MIB node is read only.
SNMP v3 User List	
Group Name	Set the name of SNMPv3 group.
Security Level	Select from "NoAuth/NoPriv", "Auth/NoPriv", and "Auth/Priv".
Read-Only View	Select an MIB view to set permission as "Read-only" from the MIB view list.
Read-Write View	Select an MIB view to set permission as "Read-write" from the MIB view list.
Inform View	Select an MIB view to set permission as "Inform" from the MIB view list.

Table 3-5-3-3 VACM Parameters

#### 4.4.3.4. Trap

This section explains how to enable network monitoring by SNMP trap.

Figure 3-5-3-4

SNMP Trap	
Item	Description
Enable	Enable or disable SNMP Trap function.
SNMP Version	Select SNMP version; support SNMP v1/v2c/v3.
Server Address	Fill in NMS's IP address or domain name.
Port	Fill in UDP port. Port range is 1-65535. The default port is 162.
Name	Fill in the group name when using SNMP v1/v2c; fill in the username when using SNMP v3.
Auth/Priv Mode	Select from "NoAuth & No Priv", "Auth & NoPriv", and "Auth & Priv".

Table 3-5-3-4 Trap Parameters

### 3.5.3.5 MIB

This section describes how to download MIB files.

Figure 3-5-3-5

MIB	
Item	Description
MIB File	Select the MIB file you need.
Download	Click "Download" button to download the MIB file to PC.

Table 3-5-3-5 MIB Download

## 4.4.4. Device Management

### 4.4.4.1. Auto Provision

Users can customize and select the configuration profile from Development Platform. When Auto Provision is enabled and the device is connected to Internet, the device will receive the profile to achieve initial configuration. This feature will work even the device does not configure to connect Development Platform.

The screenshot shows the 'Auto Provision' tab selected. Under the 'Auto Provision' section, the 'Enable' checkbox is checked with a blue checkmark. The 'Status' is displayed as 'Connection Failed' in red text. A blue 'Save & Apply' button is located at the bottom left of the form.

### 3.5.4.2 Management Platform

You can connect the device to the DeviceHub or Development Platform on this page so as to manage the gateway centrally and remotely.

The screenshot shows the 'Management Platform' tab selected. Under the 'Management Platform' section, the 'Enable' checkbox is checked. The 'Platform Type' is set to 'DeviceHub 1.0' in a dropdown menu. The 'Activation Method' is set to 'By ID' in a dropdown menu. The 'Status' is displayed as 'Disconnected'. A blue 'Save & Apply' button is located at the bottom left of the form.

Figure 3-5-5-1

Management Platform	
Item	Description
Enable	Enable or disable to connect gateway to management platform.
Platform Type	DeviceHub 1.0 or Development Platform is optional.
Status	Show the connection status between the gateway and the management platform.



DeviceHub 1.0		
Activation Server Address	Server	IP address or domain of the DeviceHub.
DeviceHub Management Address		The URL address for the device to connect to the DeviceHub, e.g. http://220.82.63.79:8080/acs.
Activation Method		Select activation method to connect the gateway to the DeviceHub server, options are "By Authentication ID" and "By ID".
Authentication Code		Fill in the authentication code generated from the DeviceHub.
ID		Fill in the registered DeviceHub account (email) and password.
Password		

Table 3-5-5-1

### 4.4.5. Events

Event feature is capable of sending alerts by Email when certain system events occur.

#### 4.4.5.1. Events

You can view alarm messages on this page.

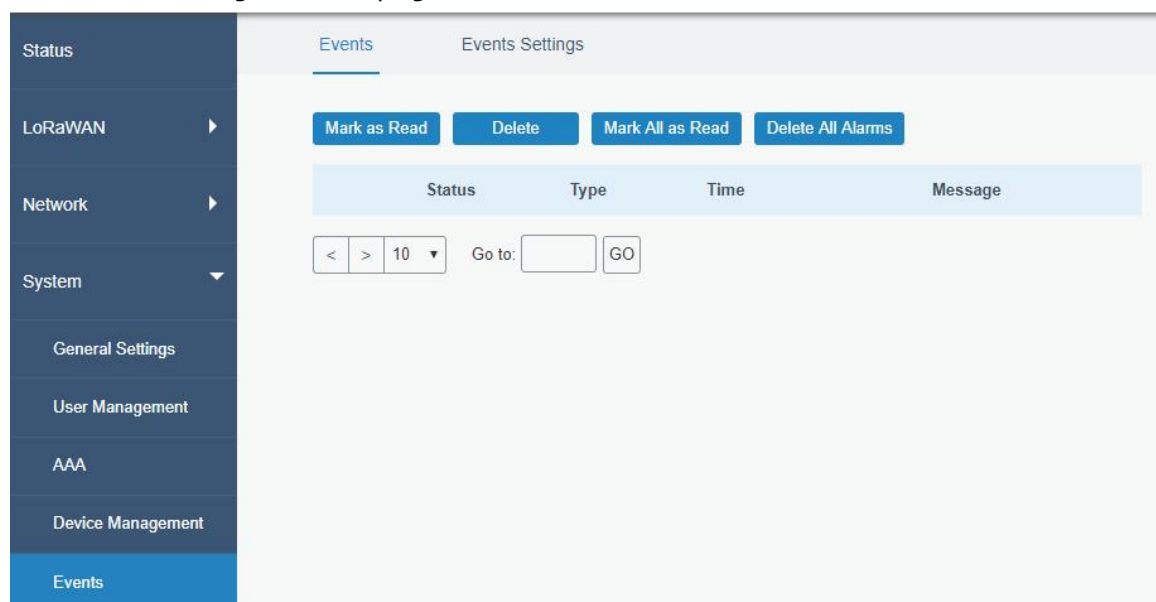


Figure 3-5-6-1

Events	
Item	Description
Mark as Read	Mark the selected event alarm as read.
Delete	Delete the selected event alarm.
Mark All as Read	Mark all event alarms as read.

Delete All Alarms	Delete all event alarms.
Status	Show the reading status of the event alarms.
Type	Show the event type that should be alarmed.
Time	Show the alarm time.
Message	Show the alarm content.

Table 3-5-6-1 Events Parameters

#### 4.4.5.2. Events Settings

In this section, you can decide what events to record and whether you want to receive email and SMS notifications when any change occurs.

**Events Settings**

Enable ☒

Phone for Notification

Email for Notification

Events	Record	Email Email Setting	SMS SMS Setting
Cellular Up	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Cellular Down	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
WAN Up	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
WAN Down	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
VPN Up	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
VPN Down	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Power On	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Power Off	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Connect to UPS External Power Supplies	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Connect to UPS Internal Battery	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
UPS Low Power (20%)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
UPS Abnormal Charging	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Disconnect the UPS	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Event Settings	
Item	Description
Enable	Check to enable "Events Settings".
Phone for Notification	Select phone group to receive SMS alarm.
Email for	Select Email group to receive Email alarm.

Notification	
Events	Event type the gateway supports to record.
Record	The relevant content of event alarm will be recorded on "Event" page if this option is checked.
Email	The relevant content of event alarm will be sent out via email if this option is checked.
Email Setting	Click and you will be redirected to the page "Email" to configure the Email group.
SMS	The relevant content of event alarm will be sent out via SMS if this option is checked.
SMS Setting	Click and you will be redirected to the page of "Phone" to configure phone group list.

Table 3-5-6-2 Events Parameters

## 4.5. Maintenance


This section describes system maintenance tools and management.

### 4.5.1. Tools

Troubleshooting tools includes ping and traceroute.

#### 4.5.1.1. Ping

Ping tool is engineered to ping outer network.

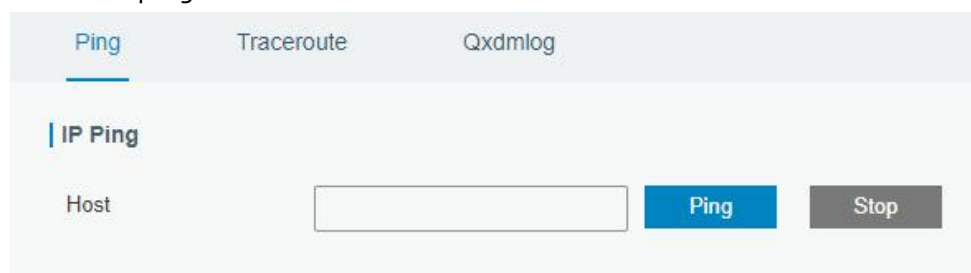

PING	
Item	Description
Host	Ping outer network from the gateway.

#### 4.5.1.2. Traceroute

Traceroute tool is used for troubleshooting network routing failures.

Figure 3-6-1-2

Traceroute	
Item	Description
Host	Address of the destination host to be detected.

Table 3-6-1-2 Traceroute Parameters

### 4.5.1.3. Qxdmlog

This section allow collecting diagnostic logs of cellular module via QXDM tool.

Figure 3-6-1-3

## 4.5.2. Schedule

This section explains how to configure scheduled reboot on the gateway.

Figure 3-6-2-1

Schedule	
Item	Description
Schedule	Select schedule event:

	Reboot: Reboot the gateway regularly.
Frequency	Select the frequency to execute the schedule.
Hour & Minute	Select the time to execute the schedule.

### 4.5.3. Log

The system log contains a record of informational, error and warning events that indicates how the system processes. By reviewing the data contained in the log, an administrator or user troubleshooting the system can identify the cause of a problem or whether the system processes are loading successfully. Remote log server is feasible, and gateway will upload all system logs to remote log server such as Syslog Watcher.

#### 4.5.3.1. System Log

This section describes how to download log file and view the recent log on web.

The screenshot shows a web interface for 'System Log' with two tabs: 'System Log' and 'Log Settings'. Under the 'System Log' tab, there are two main sections: 'Download' and 'Log'. The 'Download' section has a 'File' dropdown menu set to 'Log File' and a blue 'Download' button. The 'Log' section has a 'View recent(lines)' dropdown menu set to '20' and a large text area displaying system log entries. At the bottom of the 'Log' section is a blue 'Clear Log' button.

System Log      Log Settings

**Download**

File      Log File      Download

**Log**

View recent(lines)      20

Thu Jul 18 15:01:25 2019 user.notice redis[1859]: Background saving terminated with success  
 Thu Jul 18 15:06:26 2019 user.notice redis[1859]: 10 changes in 300 seconds. Saving...  
 Thu Jul 18 15:06:26 2019 user.notice redis[1859]: Background saving started by pid 11683  
 Thu Jul 18 15:06:26 2019 user.notice redis[11683]: DB saved on disk  
 Thu Jul 18 15:06:26 2019 user.notice redis[1859]: Background saving terminated with success  
 Thu Jul 18 15:11:27 2019 user.notice redis[1859]: 10 changes in 300 seconds. Saving...  
 Thu Jul 18 15:11:27 2019 user.notice redis[1859]: Background saving started by pid 15776  
 Thu Jul 18 15:11:27 2019 user.notice redis[15776]: DB saved on disk  
 Thu Jul 18 15:11:27 2019 user.notice redis[1859]: Background saving terminated with success  
 Thu Jul 18 15:16:28 2019 user.notice redis[1859]: 10 changes in 300 seconds. Saving...  
 Thu Jul 18 15:16:28 2019 user.notice redis[1859]: Background saving started by pid 19899  
 Thu Jul 18 15:16:28 2019 user.notice redis[19899]: DB saved on disk  
 Thu Jul 18 15:16:28 2019 user.notice redis[1859]: Background saving terminated with success

Clear Log

Figure 3-6-3-1

System Log	
Item	Description
Download	Download log file.
View recent (lines)	View the specified lines of system log.
Clear Log	Clear the current system log.

Table 3-6-3-1 System Log Parameters

#### 4.5.3.2. Log Settings

This section explains how to enable remote log server and local log setting.

Figure 3-6-3-2

Log Settings	
Item	Description
Remote Log Server	
Enable	With “Remote Log Server” enabled, gateway will send all system logs to the remote server.
Syslog Server Address	Fill in the remote system log server address (IP/domain name).
Port	Fill in the remote system log server port.
Local Log File	
Storage	User can store the log file in memory.
Size	Set the size of the log file to be stored.
Log Severity	The list of severities follows the syslog protocol.

Table 3-6-3-2 System Log Parameters

#### 4.5.3.3. Upgrade

This section describes how to upgrade the gateway firmware via web. Generally you don't need to do the firmware upgrade.

**Note: any operation on web page is not allowed during firmware upgrade, otherwise the upgrade will be interrupted, or even the device will break down.**

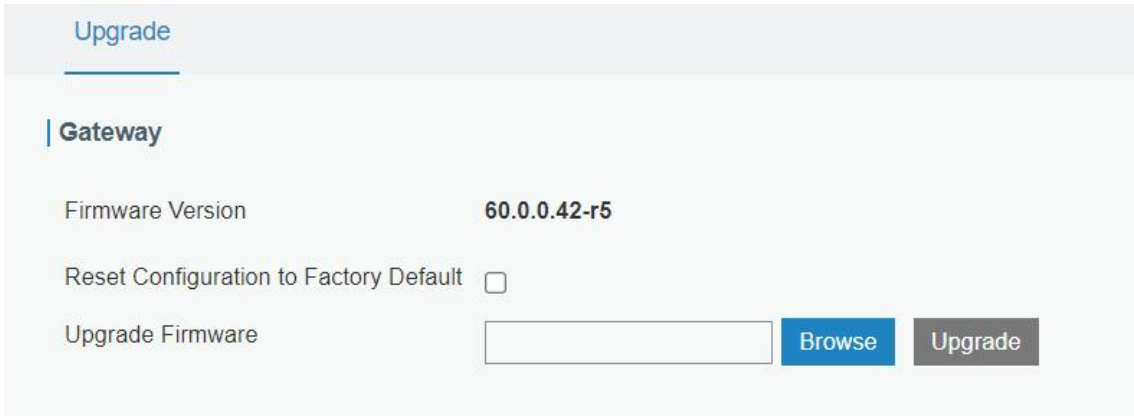


Figure 3-6-4-1

Upgrade	
Item	Description
Firmware Version	Show the current firmware version.
Reset Configuration to Factory Default	When this option is checked, the gateway will be reset to factory defaults after upgrade.
Upgrade Firmware	Click "Browse" button to select the new firmware file, and click "Upgrade" to upgrade firmware.

Table 3-6-4-1 Upgrade Parameters

4.5.4. Backup and Restore

This section explains how to create a complete backup of the whole system configurations to a file, replicate parts of important configuration only for batch backup, restore the config file to the gateway and reset to factory defaults.

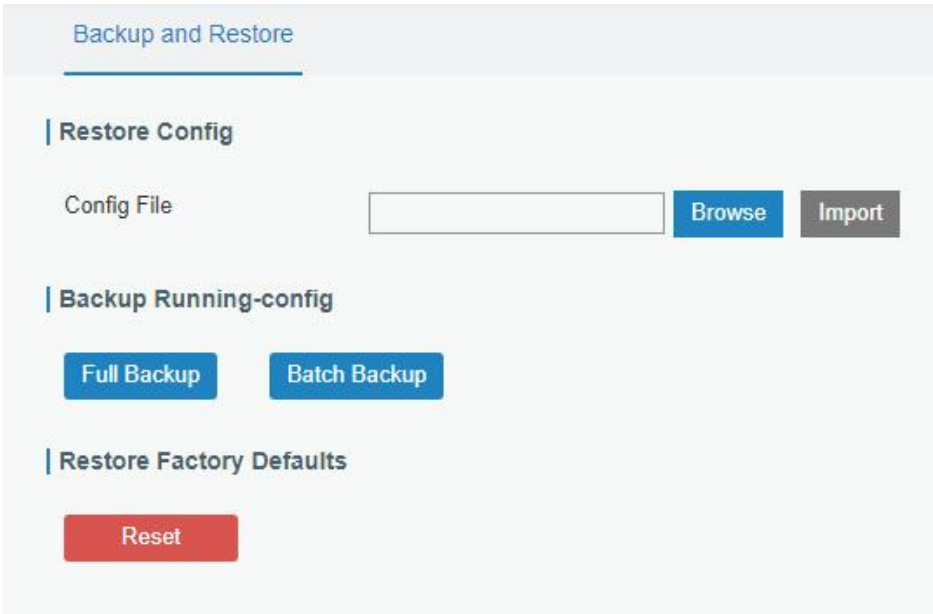


Figure 3-6-5-1

Backup and Restore	
Item	Description
Config File	Click "Browse" button to select configuration file, and then click

	"Import" button to upload the configuration file to the gateway.
Full Backup	Click "Full Backup" to export the current configuration file to the PC.
Batch Backup	Click "Batch Backup" to export current configuration except gateway ID of packet forwarder, all embedded NS settings, static IP address of WAN, WLAN settings, user management settings, DeviceHub authentication code, all APP settings.
Reset	Click "Reset" button to reset factory default settings. gateway will restart after reset process is done.

Table 3-6-5-1 Backup and Restore Parameters

### 3.6.6 Reboot

On this page you can reboot the gateway and return to the login page. We strongly recommend clicking "Save" button before rebooting the gateway so as to avoid losing the new configuration.

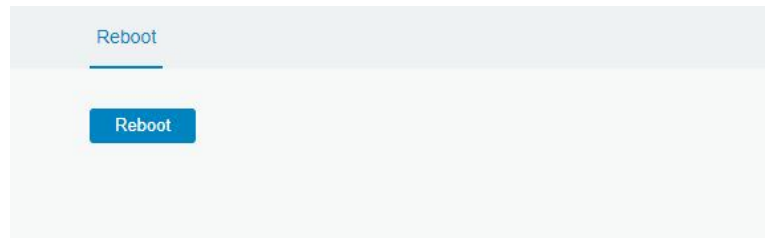


Figure 3-6-6-1

## 4.6. APP

### 4.6.1. Python

Python is an object-oriented programming language that has gained popularity because of its clear syntax and readability.

As an **interpreted language**, Python has a design philosophy that emphasizes code **readability**, notably using **whitespace** indentation to delimit **code blocks** rather than curly brackets or keywords, and a syntax that allows programmers to express concepts in fewer **lines of code** than it's used in other languages such as **C++** or **Java**. The language provides constructs and intends to enable writing clear programs on both small and large scale.

Users can use Python to quickly generate the prototype of the program, which can be the final interface of the program, rewrite it with a more appropriate language, and then encapsulate the extended class library that Python can call.

This section describes how to view the relevant running status such as App-manager, SDK version, extended storage, etc. Also you can change the App-manager configuration, and import the Python App package from here.



#### 4.6.1.1. Python

Figure 3-7-1-1

Python	
Item	Description
AppManager Status	Show AppManager's running status, like "Uninstalled", "Running" or "Stopped".
SDK Version	Show the version of the installed SDK.
SDK Path	Show the SDK installation path.
Available Storage	Select available storage to install SDK.
SDK Upload	Upload and install SDK for Python.
Uninstall	Uninstall SDK.
View	View application status managed by AppManager.

Table 3-7-1-1 Python Parameters

#### 4.6.1.2. App Manager Configuration

Figure 3-7-1-2

AppManager Configuration	
Item	Description

Enable	After enabling Python AppManager, user can click "View" button on the "Python" webpage to view the application status managed by AppManager.
<b>App Management</b>	
ID	Show the ID of the imported App.
App Command	Show the name of the imported App.
Logfile Size(MB)	User-defined Logfile size. Range: 1-50.
Uninstall	Uninstall APP.
<b>App Status</b>	
App Name	Show the name of the imported App.
App Version	Show the version of the imported App.
SDK Version	Show the SDK version which the imported App is based on.

Table 3-7-1-2 APP Manager Parameters

### 3.7.1.3 Python App

Figure 3-7-1-3

Python APP	
Item	Description
App Package	Select App package and import.
App Name	Select App to import configuration.
App Configuration	Select configuration file and import.
Debug File	Export script file.
Debug Script	Select Python script to be debugged and import.

Table 3-7-1-3 APP Parameters

### 3.7.2 Node-RED

Node-RED is a flow-based development tool for visual programming and wiring together hardware devices, APIs and online services as part of the Internet of Things. Node-RED provides a web-browser-based flow editor, which can easily wire together flows using the wide range of nodes in the palette. For more guidance and documentation please refer to [Node-RED official website](#).

#### 3.7.2.1 Node-RED


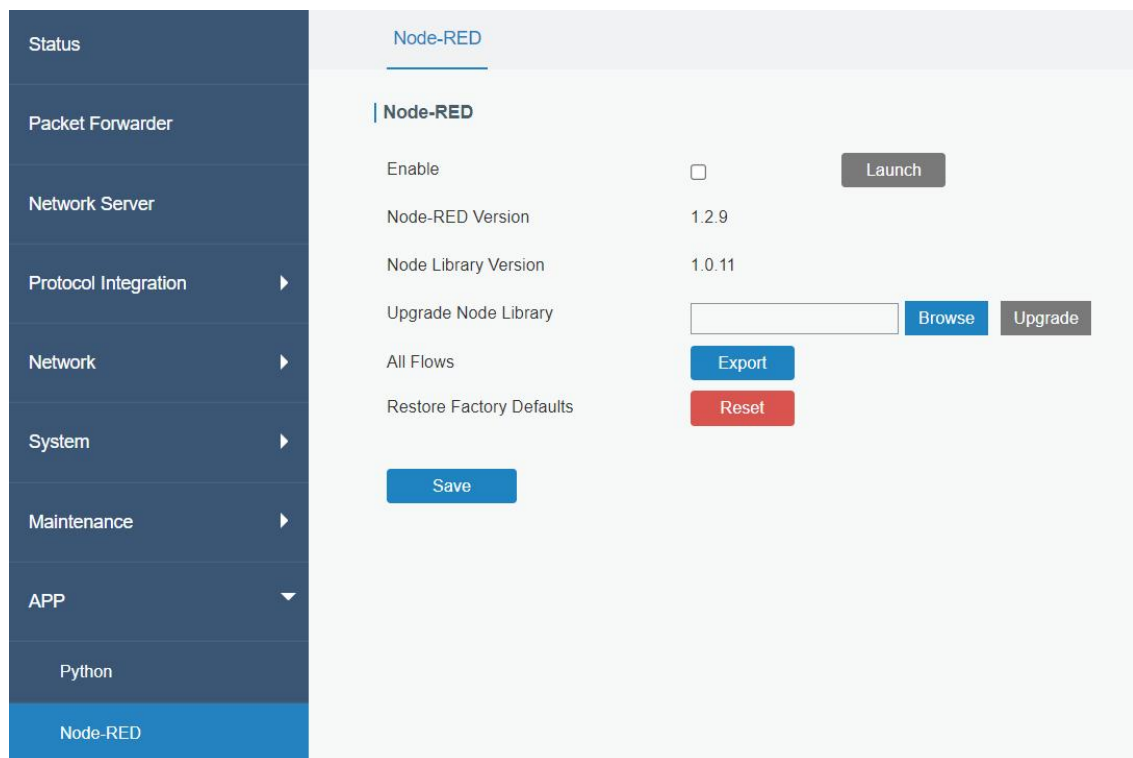


Figure 3-7-2-1

Node-RED	
Item	Description
Enable	Enable the Node-RED.
Launch	Click to launch the web GUI of Node-RED.
Node-RED Version	Show the version of the Node-RED. The Node-RED version can be upgraded only when you upgrade the gateway.
Node Library Version	Show the version of the node library.
Upgrade Node Library	Upgrade the node library by importing the library package.
All Flows Export	Export all flows as a JSON format file.
Restore Factory Default	Erase all flows data of Node-RED.

Table 3-7-2-1 Node-RED Parameters

provides a customized node library to use the interfaces of the gateway.

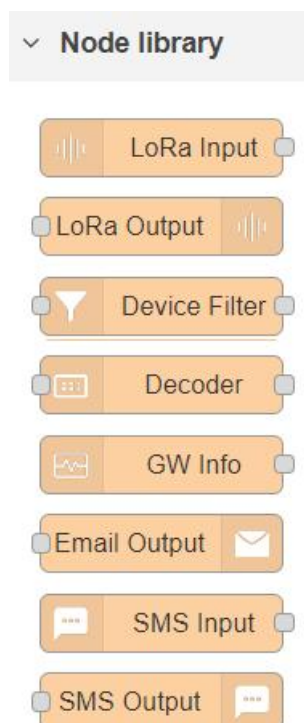

Node Library	
Node	Description
LoRa Input	Receive LoRaWAN® packets from the gateway. This only works when the network server is enabled.
LoRa Output	Send downlink commands to LoRaWAN® nodes.
Device Filter	Filter out the data of one or more specific LoRaWAN® nodes via device EUIs.
GW Info	Monitor events of gateway, this needs to ensure the event detection is enabled in General > Events > Events Settings.
Email Output	Send an Email. If you select SMTP option as " Same as the gateway" , it is necessary to go to System > General Settings > SMTP page to configure SMTP client settings.
SMS Input	Receive SMS message. This only works when the cellular is connected.
SMS Output	Send an SMS message. This only works when the cellular is connected.


Table 3-7-2-2 Node Library Parameters

## Chapter 4 Application Examples

### 4.1 Restore Factory Defaults

#### Method 1:

Log in web interface, and go to **Maintenance > Backup and Restore**, click **Reset** button, you will be asked to confirm if you'd like to reset it to factory defaults. Then click **Reset** button.

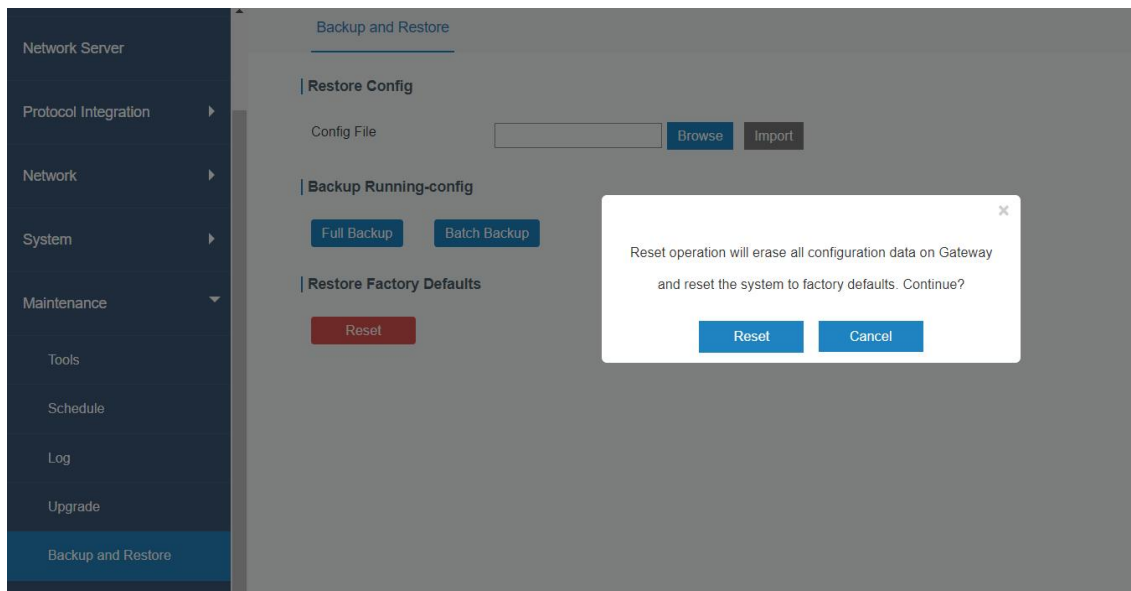

Then the gateway will reboot and restore to factory settings immediately.



Please wait till SYS light statically and the login page pops up again, which means the gateway has already been reset to factory defaults successfully.

#### Related Topic

[Restore Factory Defaults](#)

#### Method 2:


Locate the reset button on the gateway, press and hold the reset button for more than 5s until the SYS LED blinks.

## 4.2 Firmware Upgrade

It is suggested that you contact technical support first before you upgrade gateway firmware. Gateway firmware file suffix is “.bin” .

After getting firmware file please refer to the following steps to complete the upgrade.

- 1.Go to “Maintenance > Upgrade” .
- 2.Click “Browse” and select the correct firmware file from the PC.
- 3.Click “Upgrade” and the gateway will check if the firmware file is correct. If it’s correct, the firmware will be imported to the gateway, and then the gateway will start to upgrade.

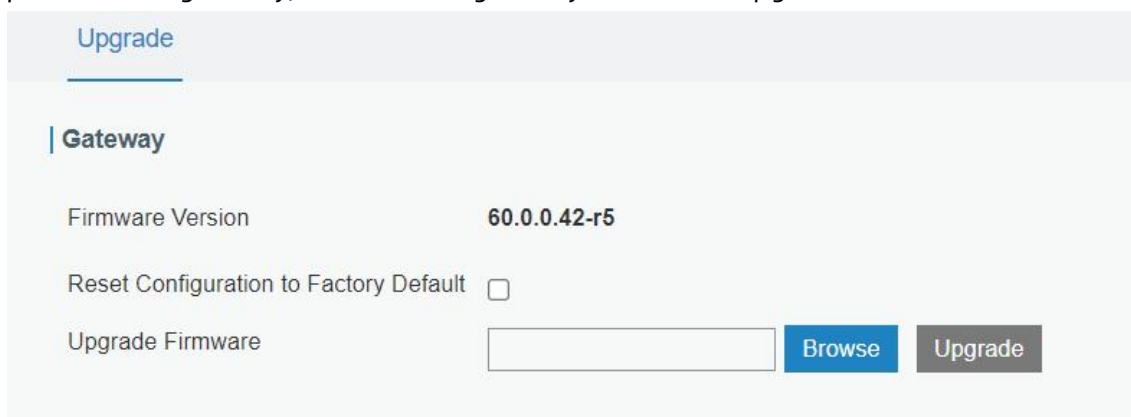


Upgrade

Gateway

Firmware Version 60.0.0.42-r5

Reset Configuration to Factory Default ☐

Upgrade Firmware  Browse Upgrade

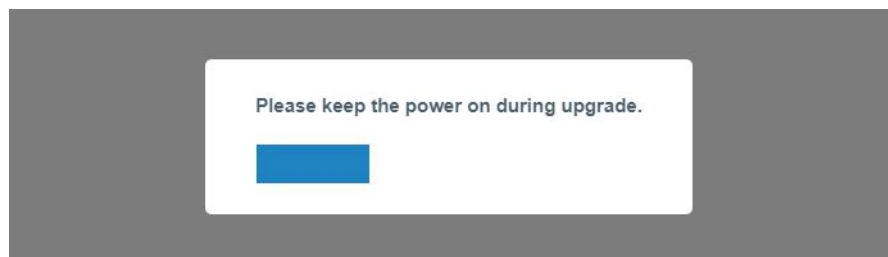

### Related Topic

[Upgrade](#)

## 4.3 Ethernet Connection

- 1.Go to “ Network > Interface > Port ” page to select the connection type and configure Ethernet port configuration, click “Save & Apply” for configuration to take effect.

Port	WLAN	Cellular	Loopback	VLAN Trunk
Port_1				
Port	eth 0			
Connection Type	Static IP			
IP Address	192.168.44.186			
Netmask	255.255.255.0			
Gateway	192.168.44.1			
MTU	1500			
Primary DNS Server	8.8.8.8			
Secondary DNS Server	223.5.5.5			
Enable NAT	<input checked="" type="checkbox"/>			

2. Connect Ethernet port of gateway to devices like router or modem.

3. Go to "Maintenance > Tools > Ping" to check network connectivity.

	Ping	Traceroute	Qxdmlog
IP Ping			
Host	<input type="text" value="www.google.com"/> <input type="button" value="Ping"/> <input type="button" value="Stop"/>		
PING www.google.com (172.217.25.4): 56 data bytes 64 bytes from 172.217.25.4: seq=0 ttl=117 time=20.090 ms 64 bytes from 172.217.25.4: seq=1 ttl=117 time=19.786 ms 64 bytes from 172.217.25.4: seq=2 ttl=117 time=19.797 ms 64 bytes from 172.217.25.4: seq=3 ttl=117 time=19.750 ms  --- www.google.com ping statistics --- 4 packets transmitted, 4 packets received, 0% packet loss round-trip min/avg/max = 19.750/19.855/20.090 ms			

## 4.4 Cellular Connection (Cellular Version Only)

1. Go to "Network > Interface > Cellular > Cellular Setting" and configure the necessary cellular info of SIM card, lick "Save" and "Apply" for configuration to take effect.

**Cellular Setting**

Enable	<input checked="" type="checkbox"/>
Network Type	Auto ▼
APN	<input type="text"/>
Username	<input type="text"/>
Password	<input type="text"/>
Access Number	<input type="text"/>
PIN Code	<input type="text"/>
Authentication Type	None ▼
Roaming	<input checked="" type="checkbox"/>
Customize MTU	<input checked="" type="checkbox"/>
MTU	1500
Enable IMS	<input type="checkbox"/>
SMS Center	<input type="text"/>

2. Go to “Status > Cellular” to view the status of the cellular connection. If it shows 'Connected', SIM has dialed up successfully.

Overview	Packet Forward	Cellular	Network	WLAN
Modem				
Status	Ready			
Model	EC25			
Version	EC25ECGAR06A07M1G			
Signal Level	23asu (-67dBm)			
Register Status	Registered (Home network)			
IMEI	860425047368939			
IMSI	460019425301842			
ICCID	89860117838009934120			
ISP	CHN-UNICOM			
Network Type	LTE			
PLMN ID				
LAC	5922			
Cell ID	340db83			
Network				
Status	Connected			
IP Address	10.132.132.59			
Netmask	255.255.255.240			
Gateway	10.132.132.60			

## Related Topic

[Cellular Setting](#)



## Cellular Status

### 4.5 Wi-Fi Application Example

#### 4.5.1 AP Mode

##### Application Example

Configure LG280 as AP to allow connection from users or devices.

##### Configuration Steps

1. Go to “Network > Interface > WLAN” to configure wireless parameters as below.

Port	WLAN	Cellular	Loopback
<b>WLAN</b>			
Enable	<input checked="" type="checkbox"/>		
Work Mode	AP		
SSID Broadcast	<input checked="" type="checkbox"/>		
AP Isolation	<input type="checkbox"/>		
Radio Type	802.11n(2.4GHz)		
Channel	Auto		
SSID	Gateway_F1200F		
BSSID	24:e1:24:f1:20:0f		
Encryption Mode	No Encryption		
Bandwidth	20MHz		
Max Client Number	10		

Click “Save” and “Apply” buttons after all configurations are done.

2. Use a smart phone to connect the access point of gateway. Go to “Status > WLAN” , and you can check the AP settings and information of the connected client/user.

Overview	Packet Forward	Cellular	Network	WLAN	VPN
<b>WLAN Status</b>					
Wireless Status	Enabled				
MAC Address	24:e1:24:f1:20:0f				
Interface Type	AP				
SSID	Gateway_F1200F				
Channel	Auto				
Encryption Type	No Encryption				
Status	Up				
IP Address	192.168.1.1				
Netmask	255.255.255.0				
Connection Duration	0 days, 02:40:52				

## 4.5.2 Client Mode

### Application Example

Configure LG280 as Wi-Fi client to connect to an access point to have Internet access.

### Configuration Steps

1. Go to “Network > Interface > WLAN” and click “Scan” to search for WiFi access point.

Port

WLAN

Cellular

Loopback

< GoBack

SSID	Channel	Signal	Cipher	BSSID	Security	Frequency	
AAA	Auto	-61dBm	AES	24:e1:24:f0:c4:13	WPA-PSK/WPA2-PSK	2412MHz	<div>Join Network</div>

2. Select one access point and click “Join Network” , then type the password of the access point.

Port	WLAN	Cellular	Loopback
<b>WLAN</b>			
Enable	<input checked="" type="checkbox"/>		
Work Mode	Client		Scan
SSID	AAA		
BSSID	24:e1:24:f0:c4:13		
Encryption Mode	WPA-PSK/WPA2-PSK		
Cipher	AES		
Key	*****		
<b>IP Setting</b>			
Protocol	DHCP Client		

Click “Save” and “Apply” buttons after all configurations are done.

3. Go to “Status > WLAN” , and you can check the connection status of the client.

Overview	Packet Forward	Cellular	Network	WLAN
<b>WLAN Status</b>				
Wireless Status	Enabled			
MAC Address	24:e1:24:f0:de:14			
Interface Type	Client			
SSID	AAA			
Channel	Auto			
Encryption Type	WPA-PSK/WPA2-PSK			
Cipher	AES			
Status	Connected			
IP Address	192.168.1.145			
Netmask	255.255.255.0			
Connection Duration	0 days, 02:44:45			

## Related Topic

[WLAN Setting](#)

[WLAN Status](#)

## 4.6 Packet Forwarder Configuration

LG280 gateway has installed multiple packet forwarders including Semtech, Basic station, Chirpstack-

Generic MQTT broker, etc. Before connecting make sure the gateway has connected to network.

1.Go to “Packet Forwarder” > “General” .

General Radios Advanced Custom Traffic

**General Setting**

Gateway EUI 24E124FFFEF12257

Gateway ID 24E124FFFEF12257

Frequency-Sync Disabled

**Multi-Destination**

ID	Enable	Type	Server Address	Connect Status	Operation
0	Enabled	Embedded NS	localhost	Connected	

2.Click to add a new network server. Fill in the network server information and enable this server.

Enable ☒

Type Semtech

Server Address eu1.cloud.thethings.network

Port Up 1700

Port Down 1700

Save

3.Go to “Packet Forwarder > Radio” page to configure center frequency and channels. The channels of the gateway and network server need to be the same.

Region US915

Name	Center Frequency/MHz
Radio 0	904.3
Radio 1	905.0

**Multi Channels Setting**

Enable	Index	Radio	Frequency/MHz
<input checked="" type="checkbox"/>	0	Radio 0	903.9
<input checked="" type="checkbox"/>	1	Radio 0	904.1
<input checked="" type="checkbox"/>	2	Radio 0	904.3
<input checked="" type="checkbox"/>	3	Radio 0	904.5
<input checked="" type="checkbox"/>	4	Radio 1	904.7
<input checked="" type="checkbox"/>	5	Radio 1	904.9
<input checked="" type="checkbox"/>	6	Radio 1	905.1
<input checked="" type="checkbox"/>	7	Radio 1	905.3

4.Add the gateway on network server page. For more details about the network server connection please

refer to **IoT Support portal**.

5. Go to “Traffic” page to view the data communication of LG280.

GeneralRadiosAdvancedCustomTraffic

Traffic Setting

StopClear

Rfch	Direction	Time	Ticks	Frequency	Datarate	Coderate	RSSI	SNR
0	up	05:57:30	212136749 3	903.9	SF10BW125	4/5	-51	13.2
0	up	05:57:29	211944923 1	904.5	SF7BW125	4/5	-95	8.5
0	up	05:57:13	210431205 7	904.6	SF8BW500	4/5	-51	11.5
0	up	05:57:06	209699855 6	903.9	SF7BW125	4/5	-65	14.2

## 4.7 Connect to IoT Cloud

1. Go to “Packet Forwarder > General” page to enable the embedded network server.

Status	General	Radios	Advanced	Custom	Traffic												
Packet Forwarder	General Setting																
Network Server	Gateway EUI 24E124FFFEF12257																
Network	Gateway ID 24E124FFFEF12257																
System	Frequency-Sync Disabled																
Maintenance	Multi-Destination																
APP	<table> <tr> <th>ID</th><th>Enable</th><th>Type</th><th>Server Address</th><th>Connect Status</th><th>Operation</th></tr> <tr> <td>0</td><td>Enabled</td><td>Embedded NS</td><td>localhost</td><td>Connected</td><td> <div>✎</div> <div>✕</div> <div>+</div> </td></tr> </table>					ID	Enable	Type	Server Address	Connect Status	Operation	0	Enabled	Embedded NS	localhost	Connected	<div>✎</div> <div>✕</div> <div>+</div>
ID	Enable	Type	Server Address	Connect Status	Operation												
0	Enabled	Embedded NS	localhost	Connected	<div>✎</div> <div>✕</div> <div>+</div>												

2. Go to “Packet Forwarder > Radio” page to configure center frequency and channels. The channels of the gateway and nodes need to be the same.

Region US915

Name	Center Frequency/MHz
Radio 0	<input type="text" value="904.3"/>
Radio 1	<input type="text" value="905.0"/>


**Multi Channels Setting**

Enable	Index	Radio	Frequency/MHz
<input checked="" type="checkbox"/>	0	<span>Radio 0</span>	<input type="text" value="903.9"/>
<input checked="" type="checkbox"/>	1	<span>Radio 0</span>	<input type="text" value="904.1"/>
<input checked="" type="checkbox"/>	2	<span>Radio 0</span>	<input type="text" value="904.3"/>
<input checked="" type="checkbox"/>	3	<span>Radio 0</span>	<input type="text" value="904.5"/>
<input checked="" type="checkbox"/>	4	<span>Radio 1</span>	<input type="text" value="904.7"/>
<input checked="" type="checkbox"/>	5	<span>Radio 1</span>	<input type="text" value="904.9"/>
<input checked="" type="checkbox"/>	6	<span>Radio 1</span>	<input type="text" value="905.1"/>
<input checked="" type="checkbox"/>	7	<span>Radio 1</span>	<input type="text" value="905.3"/>


3. Go to “Network Server > General” page to enable the network server and “Cloud mode” , then select “IoT Cloud” mode.

Status	General	Applications	Profiles	Device
Packet Forwarder				
<b>Network Server</b>	<p><b>General Setting</b></p> <p>Enable <input checked="" type="checkbox"/></p> <p>Cloud Mode <input checked="" type="checkbox"/></p> <p><span>Milesight IoT Cloud</span></p> <p>NetID <input type="text" value="010203"/></p> <p>Join Delay <input type="text" value="5"/> sec</p> <p>RX1 Delay <input type="text" value="1"/> sec</p> <p>Lease Time <input type="text" value="8760-0-0"/> hh-mm-ss</p> <p>Log Level <span>info</span></p>			
Network				
System				
Maintenance				
APP				

4. Log in the IoT Cloud. Then go to “My Devices” page and click “+New Devices” to add gateway to IoT Cloud via SN. Gateway will be added under “Gateways” menu.

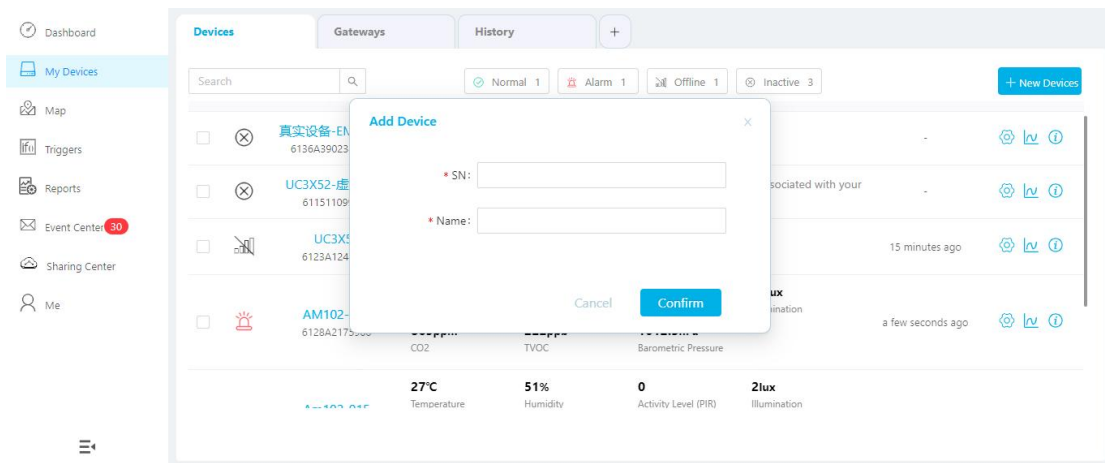

5. The gateway is online on IoT Cloud.

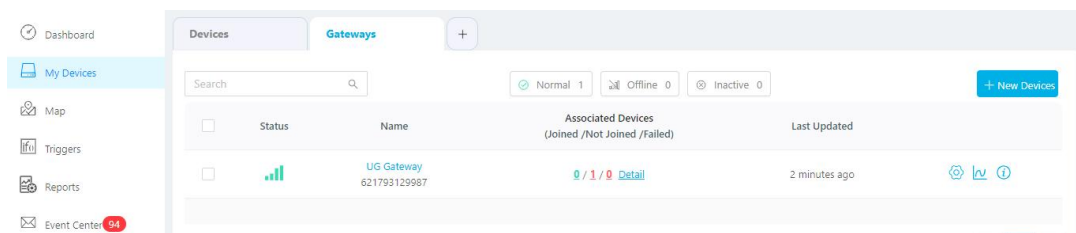

## 4.8 Application Configuration

You can create a new application on this page, which is mainly used to define the method of decoding the data sent from end-device and choosing the data transport protocol to send data to another server address. The data will be sent to your custom server address using MQTT, HTTP or HTTPS protocol.

1. Go to "Network Server" > "Application" .

2. Click  to enter the configuration page, displayed as the following picture:

Applications

Name

cloud

Description

cloud

3. Click "Save" to create this application.

4. Click  to add a data transmission type.

### HTTP or HTTPS:

Step 1: select HTTP or HTTPS as transmission protocol.

Type

HTTP

Step 2: Enter the destination URL. Different types of data can be sent to different URLs.

| URL

Data Type	URL
Uplink data	<input type="text"/>
Join notification	<input type="text"/>
ACK notification	<input type="text"/>
Error notification	<input type="text"/>

Enter the header name and header value if there is user credentials when accessing the HTTP(s) server.

| HTTP Header

Header Name	Header Value	Operation
<input type="text"/>	<input type="text"/>	<input type="button" value="X"/>
		<input type="button" value="+"/>

## MQTT:

Step 1: select the transmission protocol as MQTT.

Step 2: Fill in MQTT broker general settings.

| General

Broker Address	<input type="text"/>
Broker Port	<input type="text"/>
Client ID	<input type="text"/>
Connection Timeout/s	<input type="text" value="30"/>
Keep Alive Interval/s	<input type="text" value="60"/>

Step 3: Select the authentication method required by the server.

If you select user credentials for authentication, you need to enter the username and password for authentication.



User Credentials

Enable

☒

Username

Password

If certificate is necessary for verification, please select mode and import CA certificate, client certificate and client key file for authentication.

TLS

Enable

☒

Mode

Self signed certificates

CA File

Browse

Import

Delete

Client Certificate File

Browse

Import

Delete

Client Key File

Browse

Import

Delete

Step 4: Enter the topic to receive data and choose the QoS.

Data Type	topic	
Uplink data	<input type="text" value="device/test"/>	QoS 0
Downlink data	<input type="text"/>	QoS 0
Multicast downlink data	<input type="text"/>	QoS 0
Join notification	<input type="text"/>	QoS 0
ACK notification	<input type="text"/>	QoS 0
Error notification	<input type="text"/>	QoS 0
Request data	<input type="text" value="/event/request"/>	QoS 0
Response data	<input type="text" value="/event/response"/>	QoS 0

## 4.9 Device Configuration

Go to “Device” page and click “Add” to add LoRaWAN® node devices. Please select correct device profile according to device type.

Device

Add

Bulk Import

Delete All

Search

Device Name	Device EUI	Device-Profile	Application	Last Seen	Activated	Operation
No matching records found						

Device Name	<input type="text" value="lora-sensor"/>
Description	<input type="text" value="a short description of your node"/>
Device EUI	<input type="text" value="0000000000000000"/>
Device-Profile	<input type="text" value="ClassA-OTAA"/>
Application	<input type="text" value="cloud"/>
Payload Codec	<input type="text"/>
fPort	<input type="text" value="1"/>
Frame-counter Validation	<input type="checkbox"/>
Application Key	<input type="text"/>
Device Address	<input type="text"/>
Network Session Key	<input type="text"/>
Application Session Key	<input type="text"/>
Uplink Frame-counter	<input type="text" value="0"/>
Downlink Frame-counter	<input type="text" value="0"/>

[Save & Apply](#)

You can also click “Bulk Import” if you want to add many nodes all at once.

[Browse](#)
[Import](#)
[Template Download](#)

Click “Template Download” to download template file and add device information to this file. Application and device profile should be the same as you created on web page.

	A	B	C	D	E	F	G	H	I
1	name	description	deveui	application	deviceprofile	appkey	devaddr	appskey	nwkskey
2	24e1242191323266		24e1242191323266	cloud	ClassC-OTAA	112233445566778899aa112233445566			
3									
4									
5									

Import this file to add bulks of devices.

## 4.10 Send Data to Device

1. Go to “Network Server” > “Packets” , check the packet in the network server list to make sure that the device has joined the network successful.

1122612191	868100000	SF7BW125	-	-	17	0	JnAcc	2019-08-06T09:22:29+08:00	
112261219	868100000	SF7BW125	9.5	-77	18	0	JnReq	2019-08-06T09:22:29+08:00	

2. Fill in the device EUI or select the multicast group which you need to send downlinks. Then fill in the downlink commands, ports.

Send Data To Device

Device EUI	Type	Payload	Fport	Confirmed
11226121913	ASCII	15	15	<input checked="" type="checkbox"/>

3. Click "Send" .



4. Check the packet in the network server list to make sure that the device has received this message successful. It's suggested to enable "Confirmed" . Multicast feature does not support confirmed downlinks.

Send Data To Device

Device EUI	Type	Payload	Fport	Confirmed
11226121913	ASCII	15	15	<input checked="" type="checkbox"/>

You can click "Refresh" to refresh the list or set automatic refreshing frequency for the list.

If the device's class type is Class C, then the device will constantly receive packets.

This packet's type is DnCnf (Downlink Confirmed Packet) and if the packet's color is gray, then it means the packet cannot be transmitted now because at least one message has been in the queue. If the packet record is white, it means the packet has been delivered successfully.

1122612191311123	869525000	SF12BW125	-	-	6	2	DnCnf	2019-08-06T09:22:55+08:00	Success	!
1122612191311123	0				6	2	DnCnf		Pending	!

If the device receives this downlink confirmed packet, then the device will reply "ACK" when delivering next.


Device EUI	Frequency	Datarate	SNR	RSSI	Size	Fcnt	Type	Time	Details
11226121913	868300000	SF10BW125	-	-	0	3	DnUnc	2019-08-06T09:23:44+08:00	!
11226121913	868300000	SF10BW125	10.5	-75	64	2	UpCnf	2019-08-06T09:23:44+08:00	!
11226121913	869525000	SF12BW125	-	-	6	2	DnCnf	2019-08-06T09:22:55+08:00	!
11226121913	0				6	2	DnCnf		!
11226121913	868500000	SF10BW125	-	-	0	1	DnUnc	2019-08-06T09:22:49+08:00	!

Packets Details	
Dev Addr	07e7
GwEUI	24e124ff
AppEUI	557240
DevEUI	1122612191311123
Immediately	-
Timestamp	874346044
Type	UpCnf
Adr	false
AdrAckReq	false
Ack	true
Fcnt	21
Fport	55
Modulation	LORA

Ack is “true” means that the device has received this packet.

If the device’s class type is Class A, only after the device sends out an uplink packet will the network server sends out data to the device.

Network Server									
Clear									
Device EUI	Frequency	Datarate	SNR	RSSI	Size	Fcnt	Type	Time	Details
1122612191311123	868300000	SF10BW125	-	-	0	19	DnUnc	2019-08-06T09:49:38+08:00	!
1122612191311123	868300000	SF10BW125	10.8	-76	64	21	ACK	2019-08-06T09:49:38+08:00	!
1122612191311123	868300000	SF10BW125	10.8	-76	64	21	UpCnf	2019-08-06T09:49:38+08:00	!
1122612191311123	868100000	SF10BW125	-	-	6	18	DnCnf	2019-08-06T09:48:43+08:00	Success
1122612191311123	868100000	SF10BW125	9.8	-77	64	20	UpCnf	2019-08-06T09:48:43+08:00	!
1122612191311123	0				6	18	DnCnf	Pending	!
1122612191311123	868500000	SF10BW125	-	-	0	17	DnUnc	2019-08-06T09:47:38+08:00	!
1122612191311123	868500000	SF10BW125	8.0	-76	64	19	UpCnf	2019-08-06T09:47:38+08:00	!
1122612191311123	868100000	SF10BW125	-	-	0	16	DnUnc	2019-08-06T09:46:38+08:00	!
1122612191311123	868100000	SF10BW125	11.2	-74	64	18	UpCnf	2019-08-06T09:46:37+08:00	!

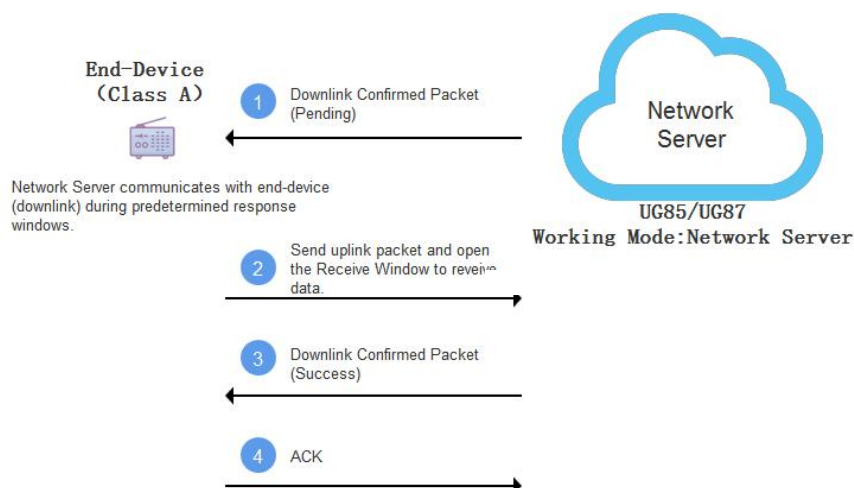

Network Server

Clear

Search

Device EUI	Frequency	Datarate	SNR	RSSI	Size	Fcnt	Type	Time	Details
1122612191311123	868300000	SF10BW125	-	-	0	19	DnUnc	2019-08-06T09:49:38+08:00	!
1122612191311123	868300000	SF10BW125	10.8	-76	64	21	ACK	2019-08-06T09:49:38+08:00	!
1122612191311123	868300000	SF10BW125	10.8	-76	64	20	UpCnf	2019-08-06T09:49:38+08:00	!
1122612191311123	868100000	SF10BW125	9.6	-77	64	18	DnCnf	2019-08-06T09:48:43+08:00	!
1122612191311123	868100000	SF10BW125	9.8	-77	64	20	UpCnf	2019-08-06T09:48:43+08:00	!
1122612191311123	0				6	18	DnCnf		!
1122612191311123	868500000	SF10BW125	-	-	0	17	DnUnc	2019-08-06T09:47:38+08:00	!
1122612191311123	868500000	SF10BW125	8.0	-76	64	19	UpCnf	2019-08-06T09:47:38+08:00	!
1122612191311123	868100000	SF10BW125	-	-	0	16	DnUnc	2019-08-06T09:46:38+08:00	!
1122612191311123	868100000	SF10BW125	11.2	-74	64	18	UpCnf	2019-08-06T09:46:37+08:00	!

Showing 51 to 60 of 355 rows 10 rows per page

Manual Refresh Refresh

means the device has received the packet you send.


## Related Topic

### [Packets](#)

## 4.11 Node-RED

### 4.11.1 Start the Node-RED

1. Go to "App > Node-RED" to enable the Node-RED feature.
2. After enabled, click "Launch" to go to the Node-RED web GUI and to log in with the same username and password as gateway.

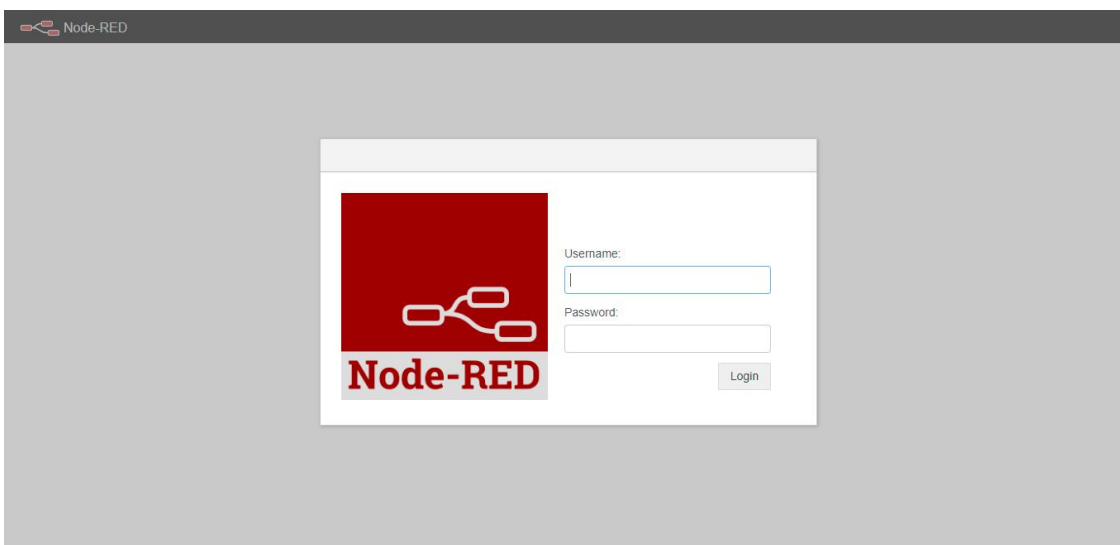

### 4.11.2 Send Data by Email


## Application Example

Send AM104 device data by Email.




## Configuration Steps

1. Add a "LoRa Input" node. Before adding please ensure network server mode is enabled and LoRaWAN devices have joined the network.
2. If you add many devices and only need one device data, add "Device Filter" node behind the "LoRa Input" and type the device EUI.

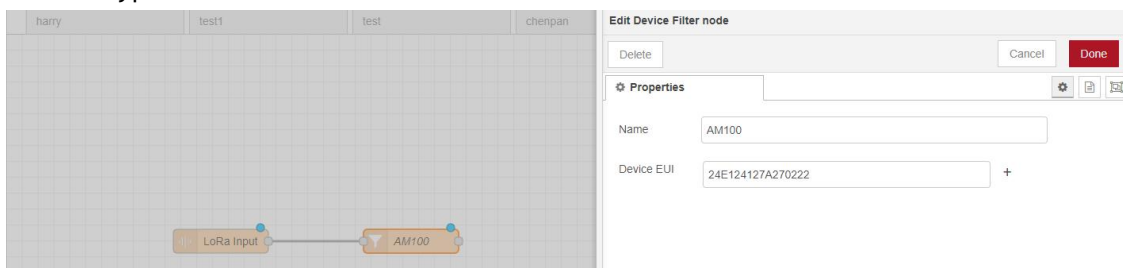

3. Add a "Decoder" node to decode the sensor data.

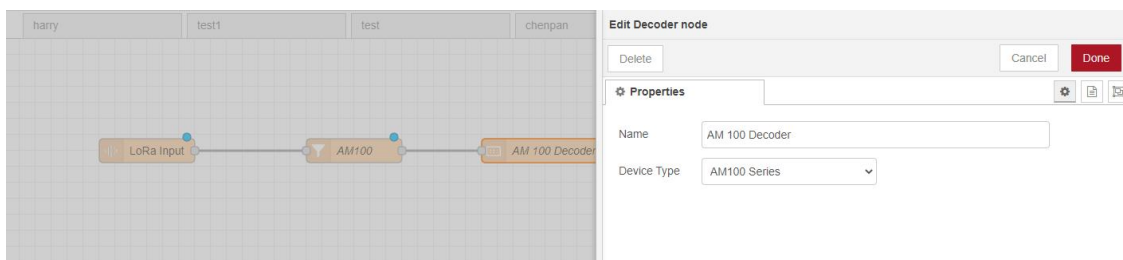


4. Add an "Email Output" and type the SMTP client settings, destination email address and contents.

Example content:

*The time is {{time}}*


*Deveui is {{deveui}}*

*Humidity is {{payload.humidity}}*

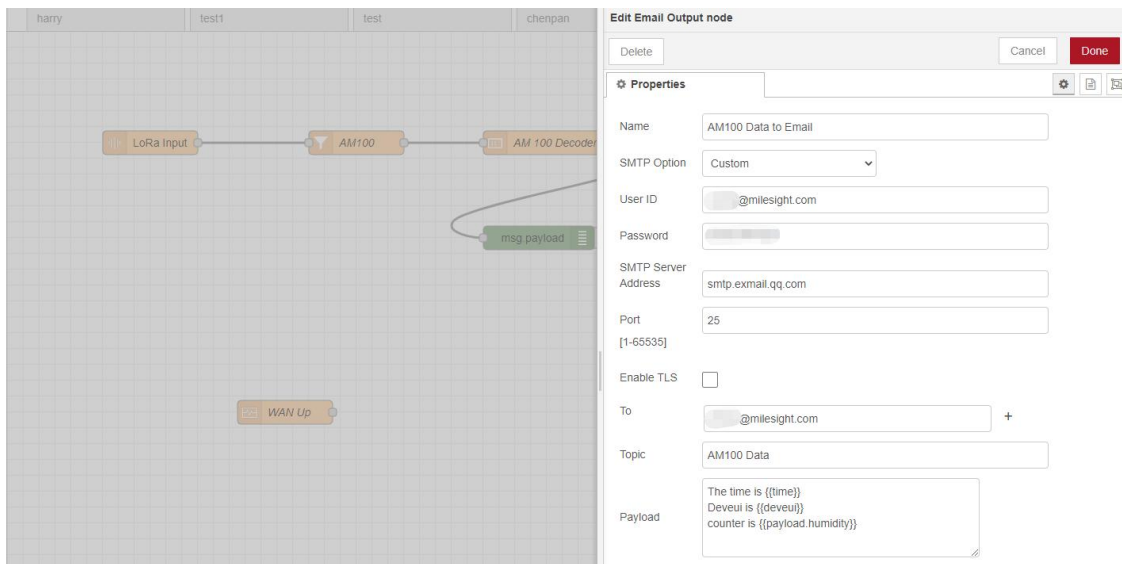


**Note:**

- 1) When you select SMTP Option as "Same as Gateway" , go to "System -> General Settings -> SMTP" to configure the SMTP clients.
- 2) Basic format to call LoRaWAN node data is `{{property name}}`, you can click "Help" page for more info about the Email or SMS payload format.
- 3) If you need to check the output content in every node, please add debug node.
5. After completing the configuration, click "Deploy" to save all your configuration.

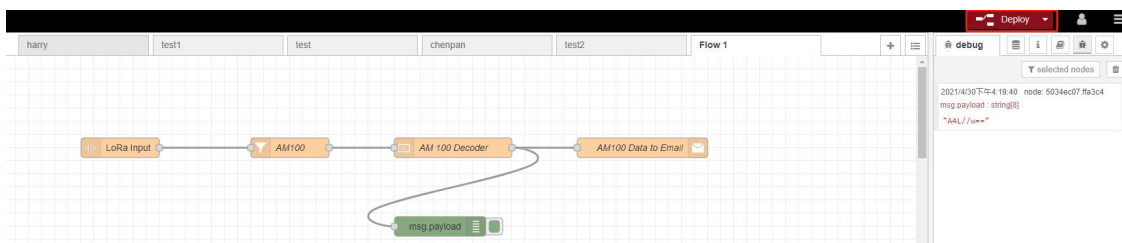

6. When AM104 sends data to gateway, gateway will transfer the data to email.

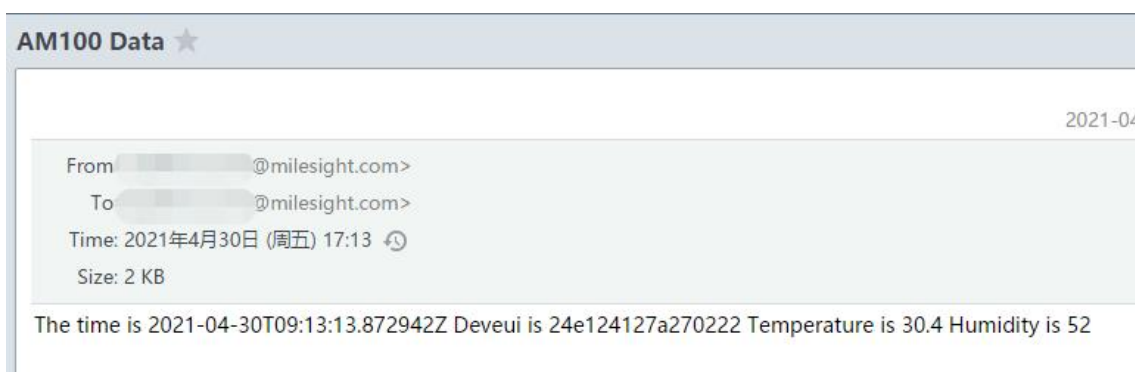

**Related Topic**



## 5. Contact Us

Jinan USR IOT Technology Limited

Address : Floor 12 and 13, CEIBS Alumni Industrial Building, No. 3 Road of Maolingshan, Lixia District, Jinan, Shandong, China

Official website: <https://www.pusr.com>

Official shop: <https://shop.usriot.com>

Technical support: <http://h.usriot.com/>

Email : [sales@usriot.com](mailto:sales@usriot.com)

Tel : +86-531-88826739

Fax : +86-531-88826739-808

## 6. Disclaimer

The information in this document provided in connection with Jinan USR IoT technology ltd. and/or its affiliates' products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of USR IoT products. EXCEPT AS SET FORTH IN THE TERMS AND CONDITIONS AS SPECIFIED IN THE LICENSE AGREEMENT FOR THIS PRODUCT, USR IoT AND/OR ITS AFFILIATES ASSUME NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL USR IoT AND/OR ITS AFFILIATES BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF USR IoT AND/OR ITS AFFILIATES HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. USR IoT and/or its affiliates make no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. USR IoT and/or its affiliates do not make any commitment to update the information contained in this document.





**Your Trustworthy Smart IOT Partner**



Official Website: [www.pusr.com](http://www.pusr.com)

Official Shop: [shop.usriot.com](http://shop.usriot.com)

Technical Support: [h.usriot.com](http://h.usriot.com)

Inquiry Email: [inquiry@usriot.com](mailto:inquiry@usriot.com)

Skype & WhatsApp: +86 13405313834

Click to view more: [Product Catalog](#) & [Facebook](#) & [Youtube](#)