

EMC TEST REPORT

for

Shandong USR IOT Technology Limited

Serial to Ethernet Module

Model No.: USR-TCP232-T2, USR-TCP232-S2, USR-TCP232-302, USR-TCP232-304,
USR-TCP232-310, USR-K2, USR-K2z, USR-TCP232-D2, USR-TCP232-303,
USR-TCP232-306

Prepared for : Shandong USR IOT Technology Limited
Address : 1105, Building 1, Aosheng Building, No. 1166 Xinluo Street,
Gaoxin Qu, Jinan, Shandong, 250101, China

Prepared by : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road,
Nanshan District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544
Fax: (86) 755-26014772

Report Number : R0116051009E
Date of Test : Jun. 02~29, 2016
Date of Report : Jun. 29, 2016

TABLE OF CONTENTS

Description

Page

Test Report Verification


1. GENERAL INFORMATION.....	6
1.1. Description of Device (EUT).....	6
1.2. Auxiliary Equipment Used during Test.....	7
1.3. Description of Test Facility.....	8
1.4. Measurement Uncertainty.....	8
1.5. Test Summary.....	9
1.6. EMS Performance Criteria.....	9
1.7. Model List.....	10
2. POWER LINE CONDUCTED EMISSION TEST.....	11
2.1. Block Diagram of Test Setup.....	11
2.2. Measuring Standard.....	11
2.3. Power Line Conducted Emission Limits.....	11
2.4. EUT Configuration on Measurement.....	11
2.5. Operating Condition of EUT.....	11
2.6. Test Procedure.....	12
2.7. Test Equipment.....	12
2.8. Measuring Results.....	12
3. RADIATED EMISSION TEST.....	15
3.1. Block Diagram of Test.....	15
3.2. Measuring Standard.....	15
3.3. Radiated Emission Limits.....	15
3.4. EUT Configuration on Test.....	16
3.5. Operating Condition of EUT.....	16
3.6. Test Procedure.....	16
3.7. Test Equipment.....	16
3.8. Measuring Results.....	16
4. HARMONIC CURRENT EMISSION TEST.....	19
4.1. Block Diagram of Test Setup.....	19
4.2. Measuring Standard.....	19
4.3. Operation Condition of EUT.....	19
4.4. Test Equipment.....	19
4.5. Measuring Results.....	19
5. VOLTAGE FLUCTUATION AND FLICKER TEST.....	21
5.1. Block Diagram of Test Setup.....	21
5.2. Measuring Standard.....	21
5.3. Operation Condition of EUT.....	21
5.4. Test Equipment.....	21

5.5. Measuring Results.....	21
6. ELECTROSTATIC DISCHARGE IMMUNITY TEST.....	23
6.1. Block Diagram of Test Setup.....	23
6.2. Measuring Standard.....	23
6.3. Severity Levels and Performance Criterion.....	23
6.4. EUT Configuration.....	23
6.5. Operating Condition of EUT.....	24
6.6. Test Procedure.....	24
6.7. Test Equipment.....	24
6.8. Measuring Results.....	24
7. RF FIELD STRENGTH SUSCEPTIBILITY TEST.....	26
7.1. Block Diagram of Test.....	26
7.2. Measuring Standard.....	26
7.3. Severity Levels and Performance Criterion.....	26
7.4. EUT Configuration on Test.....	27
7.5. Operating Condition of EUT.....	27
7.6. Test Procedure.....	27
7.7. Test Equipment.....	27
7.8. Measuring Results.....	27
8. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST.....	29
8.1. Block Diagram of Test Setup.....	29
8.2. Measuring Standard.....	29
8.3. Severity Levels and Performance Criterion.....	29
8.4. EUT Configuration.....	29
8.5. Operating Condition of EUT.....	30
8.6. Test Procedure.....	30
8.7. Test Equipment.....	30
8.8. Measuring Results.....	30
9. SURGE IMMUNITY TEST.....	32
9.1. Block Diagram of Test Setup.....	32
9.2. Measuring Standard.....	32
9.3. Severity Levels and Performance Criterion.....	32
9.4. EUT Configuration.....	32
9.5. Operating Condition of EUT.....	33
9.6. Test Procedure.....	33
9.7. Test Equipment.....	33
9.8. Measuring Results.....	33
10. INJECTED CURRENTS SUSCEPTIBILITY TEST.....	35
10.1. Block Diagram of Test Setup.....	35
10.2. Measuring Standard.....	35
10.3. Severity Levels and Performance Criterion.....	35
10.4. EUT Configuration.....	35
10.5. Operating Condition of EUT.....	36
10.6. Test Procedure.....	36
10.7. Test Equipment.....	36
10.8. Measuring Results.....	36

11. VOLTAGE DIPS AND INTERRUPTIONS TEST.....	38
11.1. Block Diagram of Test Setup.....	38
11.2. Measuring Standard.....	38
11.3. Severity Levels and Performance Criterion.....	38
11.4. EUT Configuration.....	39
11.5. Operating Condition of EUT.....	39
11.6. Test Procedure.....	39
11.7. Test Equipment.....	39
11.8. Measuring Results.....	39
12. PHOTOGRAPHS.....	41
12.1. Photo of Power Line Conducted Emission Test.....	41
12.2. Photo of Radiated Emission Test.....	41
12.3. Photo of Flicker/Harmonic Test.....	42
12.4. Photo of Electrostatic Discharge Test.....	42
12.5. Photo of RF Field Strength susceptibility Test.....	43
12.6. Photo of Electrical Fast Transient/Burst Immunity Test.....	43
12.7. Photo of Surge Immunity Test.....	44
12.8. Photo of Injected Currents Susceptibility Test.....	44
12.9. Photo of Voltage dips and interruptions Test.....	45

APPENDIX I (Photos of the EUT) (3 pages)

TEST REPORT VERIFICATION

Applicant : Shandong USR IOT Technology Limited
Manufacturer : Shandong USR IOT Technology Limited
EUT : Serial to Ethernet Module
Model No. : USR-TCP232-T2, USR-TCP232-S2, USR-TCP232-302,
USR-TCP232-304, USR-TCP232-310, USR-K2, USR-K2z,
USR-TCP232-D2, USR-TCP232-303, USR-TCP232-306
Rating : See Chapter 1.7 for model list
Trade Mark : 

Measurement Procedure Used:


EN 55022: 2010+AC: 2011;
EN 61000-3-2: 2014;
EN 61000-3-3: 2013;
EN 55024: 2010+A1: 2015;
(IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4;
IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-11)


The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the EN 55022, EN 61000-3-2, EN 61000-3-3, and EN 55024 requirements. The Project in IEC 61000-4-3 was tested in Shenzhen EMTEK Co., Ltd.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.


Date of Test : Jun. 02~29, 2016

Prepared by :





(Engineer/ Kebo Zhang)

Reviewer :


(Project Manager/ Oliay Yang)

Approve & Authorized Signer :


(Manager/ Tom Chen)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: Serial to Ethernet Module
Model Number	: USR-TCP232-T2, USR-TCP232-S2, USR-TCP232-302, USR-TCP232-304, USR-TCP232-310, USR-K2, USR-K2z, USR-TCP232-D2, USR-TCP232-303, USR-TCP232-306 (Note: All samples are the same except the model number & appearance, so we prepare “USR-TCP232-310” for EMC test only.)
Test Power Supply	: DC 5V via adapter AC 230V, 50Hz
Applicant Address	: Shandong USR IOT Technology Limited : 1105, Building 1, Aosheng Building, No. 1166 Xinluo Street, Gaoxin Qu, Jinan, Shandong, 250101, China
Manufacturer Address	: Shandong USR IOT Technology Limited : 1105, Building 1, Aosheng Building, No. 1166 Xinluo Street, Gaoxin Qu, Jinan, Shandong, 250101, China
Factory Address	: Shandong USR IOT Technology Limited : 1105, Building 1, Aosheng Building, No. 1166 Xinluo Street, Gaoxin Qu, Jinan, Shandong, 250101, China
Date of receipt	: Jun. 02, 2016
Date of Test	: Jun. 02~29, 2016

1.2. Auxiliary Equipment Used during Test

PC	: Manufacturer: DELL M/N: Optiplex 3020 MT S/N: CN-079V51-70163-4AD-089K-A00 Input Rating: AC 100-240V, 50-60Hz 5.4A CE , FCC DOC, CCC
MONITOR	: Manufacturer: DELL M/N: UZ2215Hf S/N: CN-035VN6-72872-45A-A3AB Input Rating: AC 100-240V, 50-60Hz, 1.5A Output Rating: DC 19.5V, 4.62A TUV-GS FCC CE KCC VCCI
KEYBOARD	: Manufacturer: DELL M/N: SK-8120 S/N: CN-0DJ365-71616-49J-0MVR-A00 Input Rating: DC 5V,0.05A CE FCC VCCI KCC TUV-GS Cable: 1.8m, unshielded
MOUSE	: Manufacturer: DELL M/N: MS111-T S/N: CN-0KW2YH-71616-488-1CBJ Input Rating: DC 5V,0.1A Cable: 1.8m, unshielded CE FCC VCCI KCC TUV-GS
Adapter	: Model: FLDS1003-0501000C Input: 100-240~, 50/60Hz, 0.15A Max Output: DC 5.0V, 1.0A

1.3. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 752021

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Loads Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, July 10, 2013.

IC-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A-1, Jun. 13, 2016.

CNAS - LAB Code: L3503

Shenzhen Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing Laboratories.

Test Location

All Emissions tests were performed
Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC
Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen,
Guangdong, China

1.4. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.1dB (Horizontal)
Ur = 4.3dB (Vertical)

Conduction Uncertainty : $U_c = 3.4\text{dB}$

1.5. Test Summary

For the EUT described above. The standards used were EN 55022 for Emissions & EN 55024 for Immunity.

Table 1 : Tests Carried Out Under EN 55022: 2010+AC: 2011

Standard	Test Items	Status
EN 55022: 2010+AC: 2011 (Class B)	Power Line Conducted Emission Test (150KHz To 30MHz)	√
EN 55022: 2010+AC: 2011 (Class B)	Radiated Emission Test (30MHz To 1000MHz)	√

Table 2 : Tests Carried Out Under EN 61000-3-2: 2014 / EN 61000-3-3: 2013

Standard	Test Items	Status
EN 61000-3-2: 2014	Harmonic Current Test	√
EN 61000-3-3: 2013	Voltage Fluctuations and Flicker Test	√

Table 3 : Tests Carried Out Under EN 55024: 2010+A1: 2015

Standard	Test Items	Status
EN 55024: 2010+A1: 2015	Electrostatic Discharge immunity Test	√
EN 55024: 2010+A1: 2015	RF Field Strength susceptibility Test	√
EN 55024: 2010+A1: 2015	Electrical Fast Transient/Burst Immunity Test	√
EN 55024: 2010+A1: 2015	Surge Immunity Test	√
EN 55024: 2010+A1: 2015	Injected Currents Susceptibility Test	√
EN 55024: 2010+A1: 2015	Magnetic Field Susceptibility Test	x
EN 55024: 2010+A1: 2015	Voltage Dips and Interruptions Test	√

- √ Indicates that the test is applicable
x Indicates that the test is not applicable

1.6. EMS Performance Criteria


- √ A: Normal performance within the specification limits
- √ B: Temporary degradation or loss of function or performance which is self-recoverable
- √ C: Temporary degradation or loss of function or performance which requires operator intervention or system reset
- √ D: Degradation or loss of function which is not recoverable due to damage of equipment (components) or software, or loss of data

1.7. Model List

Model	Rating Input Voltage (V)	Rating Current (mA)
USR-TCP232-T2	3.3V/5V---	200mA
USR-TCP232-S2	3.3V---	200mA
USR-TCP232-302	4.75-7V---	200mA
USR-TCP232-304	4.75-7V---	200mA
USR-TCP232-310	5-16V---	300mA
USR-K2	3.3V---	200mA
USR-K2z	3.3V---	200mA
USR-TCP232-D2	3.3V/5V---	200mA
USR-TCP232-303	5-16V---	200mA
USR-TCP232-306	5-16V---	200mA

2. POWER LINE CONDUCTED EMISSION TEST

2.1. Block Diagram of Test Setup

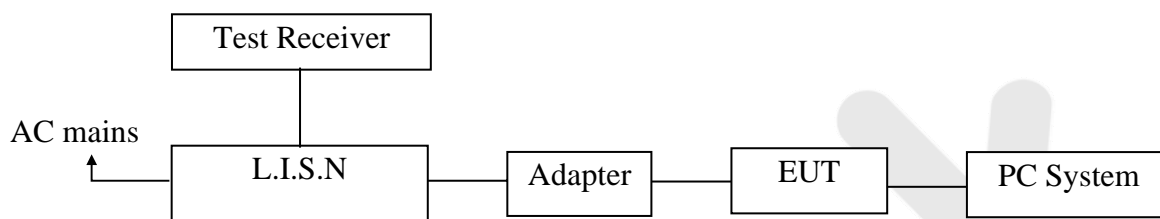

2.2. Measuring Standard

EN 55022: 2010+AC: 2011 (Class B)

2.3. Power Line Conducted Emission Limits

EN 55022: 2010+AC: 2011 (Class B)

Power Line Conducted Emission Limits

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.
NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

2.4. EUT Configuration on Measurement

The following equipments are installed on conducted emission measurement to meet EN 55022 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

2.5. Operating Condition of EUT

2.5.1. Setup the EUT as shown on Section 2.1.

2.5.2. Turn on the Power of all equipments.

2.5.3. Let the EUT work in measuring mode (On) and measure it.

2.6. Test Procedure

The EUT is put on the plane 0.8 m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network(L.I.S.N). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are investigated to find out the maximum conducted emission according to the EN55022 regulations during conducted emission measurement.

The bandwidth of the field strength meter (R&S Test Receiver ESCI) is set at 9kHz in 150kHz~30MHz.

The frequency range from 150kHz to 30MHz is investigated for AC mains.

The test results are listed in Section 2.8.

2.7. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Two-Line V-network	Rohde & Schwarz	ENV216	100055	Apr. 17, 2016	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Apr. 17, 2016	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Apr. 17, 2016	1 Year

2.8. Measuring Results

PASS.

The frequency range 150KHz to 30MHz is investigated


The test curves are shown in the following pages.

CONDUCTED EMISSION TEST DATA

Test Site: 1# Shielded Room
Operating Condition: On
Test Specification: DC 5V via adapter AC 230V, 50Hz
Comment: L
Tem.:22.2℃ Hum.:60%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

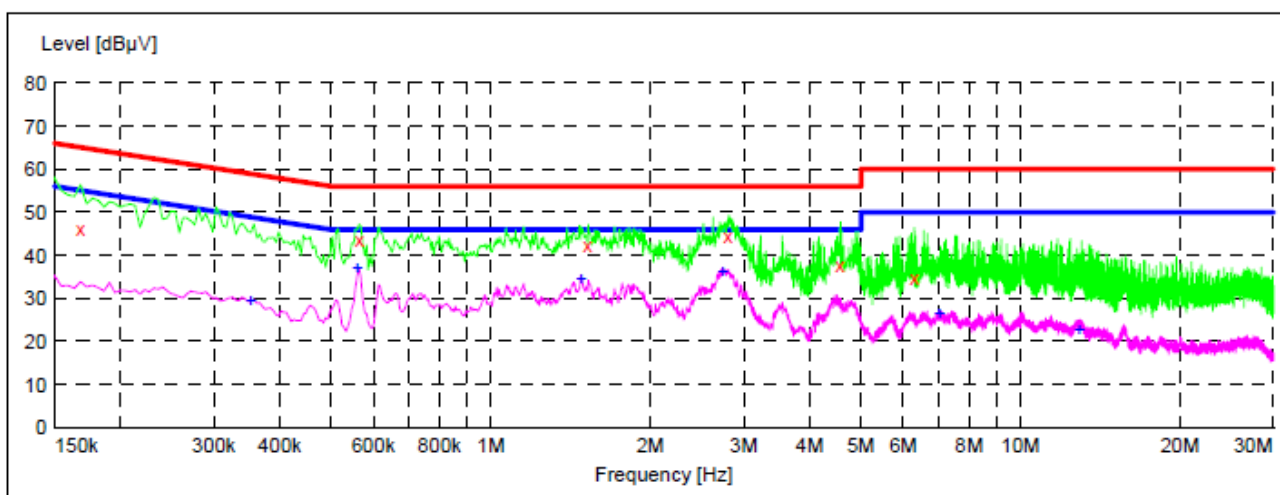

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.168000	46.10	20.1	65	19.0	QP	L1	GND
0.564000	43.80	20.1	56	12.2	QP	L1	GND
1.522000	42.40	20.3	56	13.6	QP	L1	GND
2.804500	44.60	20.4	56	11.4	QP	L1	GND
4.555000	37.60	20.5	56	18.4	QP	L1	GND
6.296500	35.00	20.5	60	25.0	QP	L1	GND


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.352500	29.90	20.1	49	19.0	AV	L1	GND
0.559500	37.30	20.1	46	8.7	AV	L1	GND
1.481500	34.70	20.3	46	11.3	AV	L1	GND
2.741500	36.40	20.4	46	9.6	AV	L1	GND
7.025500	26.70	20.5	50	23.3	AV	L1	GND
12.893500	22.90	20.7	50	27.1	AV	L1	GND

CONDUCTED EMISSION TEST DATA

Test Site: 1# Shielded Room
Operating Condition: On
Test Specification: DC 5V via adapter AC 230V, 50Hz
Comment: N
Tem.:22.2℃ Hum.:60%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

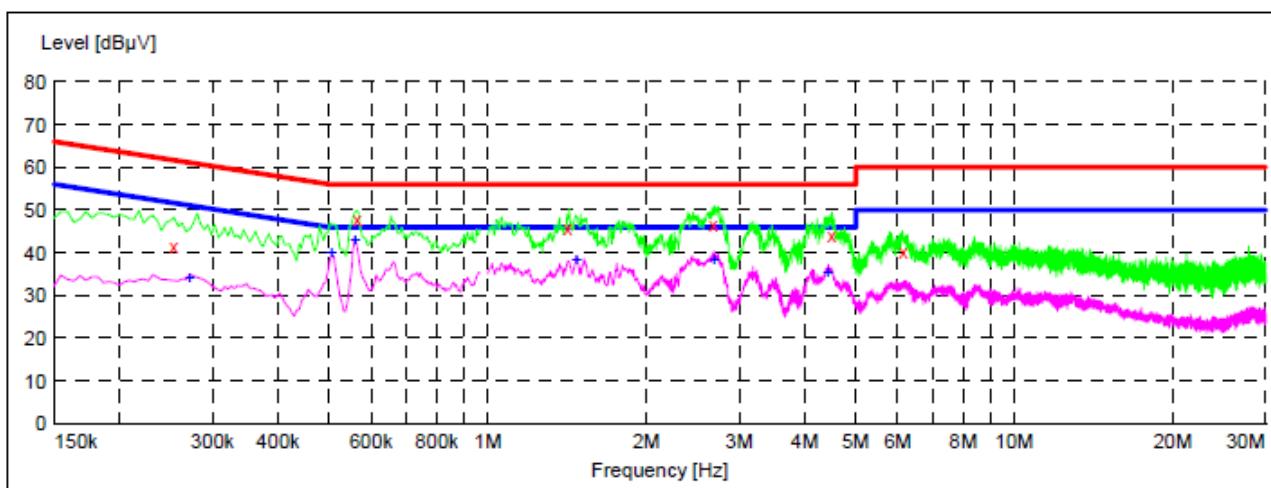

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.253500	41.60	20.1	62	20.0	QP	N	GND
0.564000	47.80	20.1	56	8.2	QP	N	GND
1.418500	45.90	20.3	56	10.1	QP	N	GND
2.678500	46.60	20.4	56	9.4	QP	N	GND
4.496500	44.00	20.5	56	12.0	QP	N	GND
6.152500	40.30	20.5	60	19.7	QP	N	GND

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.271500	34.60	20.1	51	16.5	AV	N	GND
0.505500	40.10	20.1	46	5.9	AV	N	GND
0.559500	43.20	20.1	46	2.8	AV	N	GND
1.472500	38.80	20.3	46	7.2	AV	N	GND
2.692000	38.60	20.4	46	7.4	AV	N	GND
4.420000	35.70	20.5	46	10.3	AV	N	GND


3. RADIATED EMISSION TEST

3.1. Block Diagram of Test

3.1.1. Block diagram of connection between the EUT and simulators



3.1.2. Block diagram of test setup (In chamber)

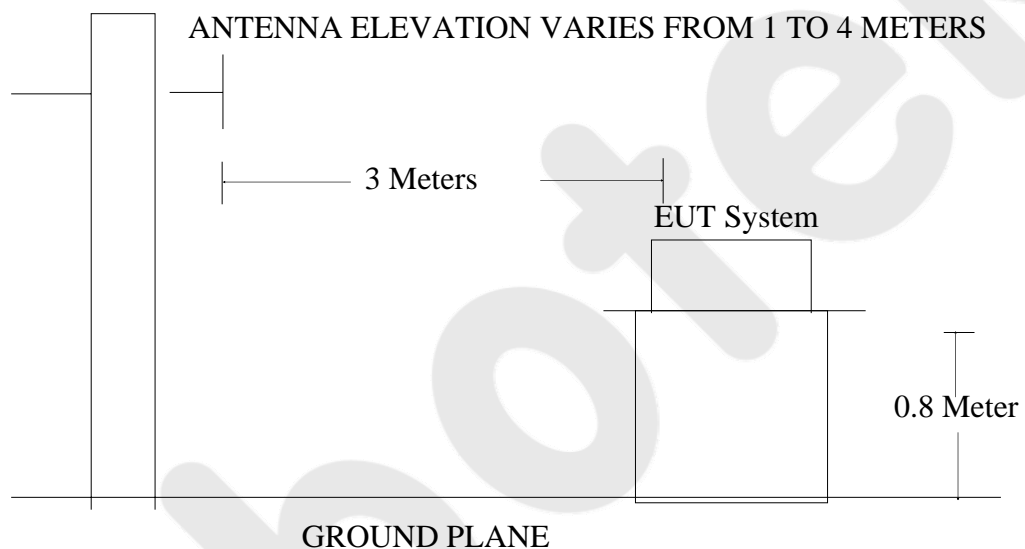

3.2. Measuring Standard

EN 55022: 2010+AC: 2011 (Class B)

3.3. Radiated Emission Limits

3.3.1. EN 55022: 2010+AC: 2011 (Class B)

Radiated Emission Limits

All emanations from an EN 55022 device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMIT (dB μ V/m)
30 ~ 230	3	40
230 ~ 1000	3	47

- Note:
- (1) The smaller limit shall apply at the combination point between two frequency bands.
 - (2) Distance refers to the distance in meters between the measuring

instrument antenna and the closed point of any part of the EUT.

3.4. EUT Configuration on Test

The EN 55022 regulations test method must be used to find the maximum emission during radiated emission measurement.

3.5. Operating Condition of EUT

3.5.1. Turn on the Power .

3.5.2. Let the EUT work in measuring mode (On) and measure it.

3.6. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Bilog antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the Receiver (ESCI) is set at 120kHz.

The EUT is tested in 9*6*6 Chamber.

The test results are listed in Section 3.8.

3.7. Test Equipment

The following test equipments are used during radiated emission measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Apr. 17, 2016	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 20, 2016	1 Year
3.	Pre-amplifier	SONOMA	310N	186860	Apr. 17, 2016	1 Year


3.8. Measuring Results

PASS.

The frequency range from 30MHz to 1000MHz is investigated.


The test curves are shown in the following pages.

Job No.:	AT0116051009E	Polarization:	Vertical
Standard:	(RE)EN 55022_Class B_3m	Power Source:	DC 5V via adapter AC 230V, 50Hz
Test item:	Radiation Test	Temp.(°C)/Hum.(%RH):	24.3(°C)/55%RH
Note:	On	Distance:	3m

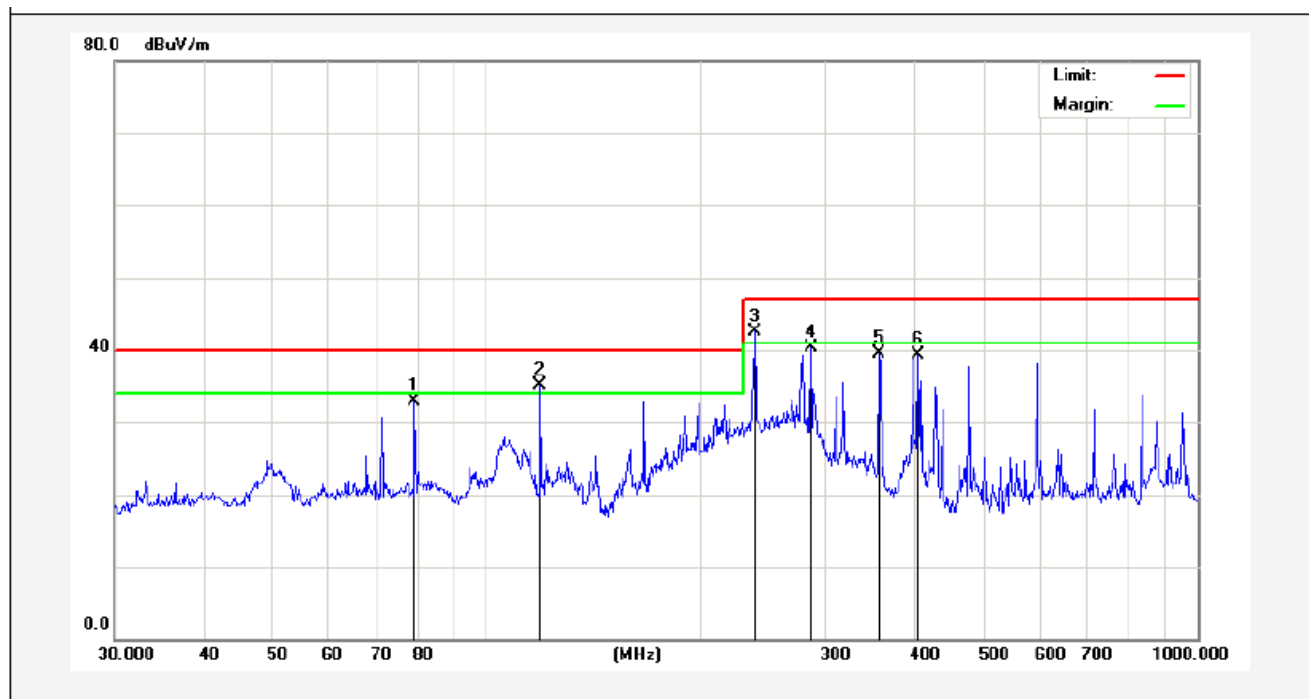

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	79.2425	62.36	-29.49	32.87	40.00	-7.13	peak			
2	119.0180	60.08	-24.98	35.10	40.00	-4.90	QP	100	0	
3	238.3102	65.17	-22.69	42.48	47.00	-4.52	QP	100	360	
4	285.9778	63.91	-23.56	40.35	47.00	-6.65	peak			
5	356.6757	60.74	-21.31	39.43	47.00	-7.57	peak			
6	404.6664	59.67	-20.29	39.38	47.00	-7.62	peak			

Job No.:	AT0116051009E	Polarization:	Horizontal
Standard:	(RE)EN 55022_Class B_3m	Power Source:	DC 5V via adapter AC 230V, 50Hz
Test item:	Radiation Test	Temp.(°C)/Hum.(%RH):	24.3(°C)/55%RH
Note:	On	Distance:	3m

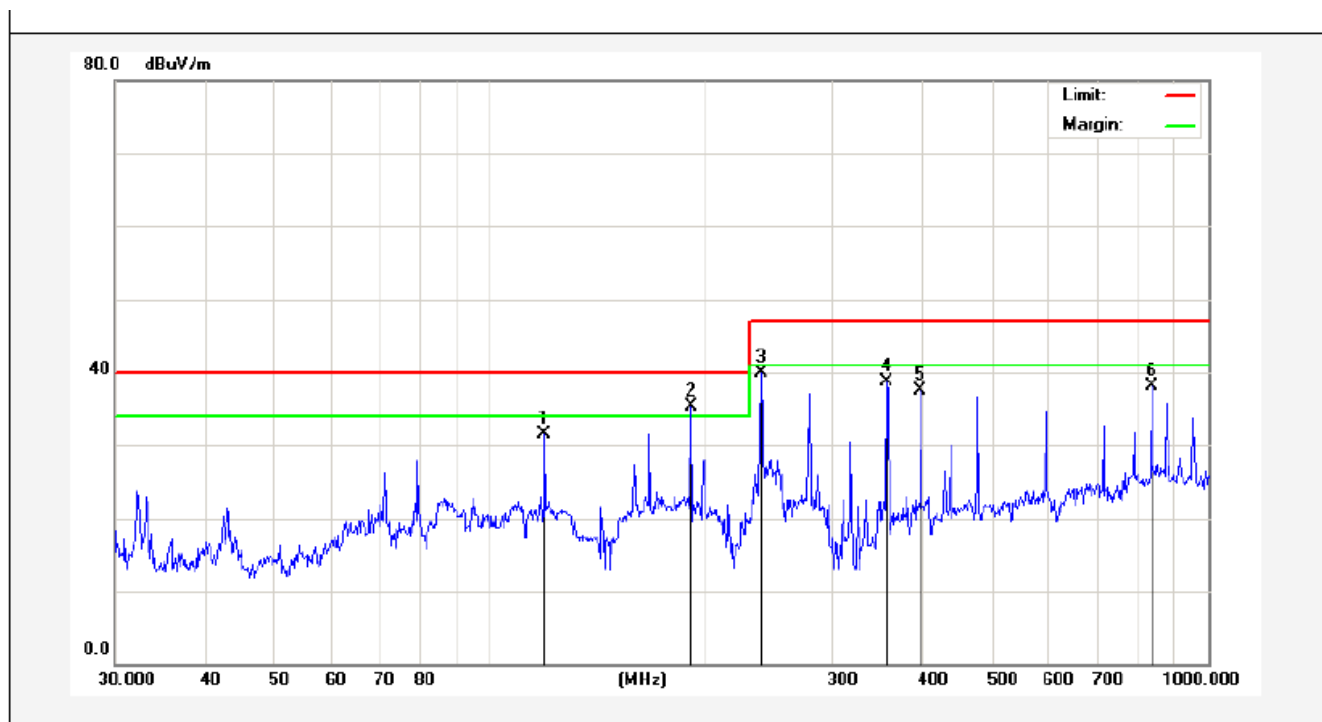


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	119.0180	61.52	-29.98	31.54	40.00	-8.46	peak			
2	190.4050	64.78	-29.46	35.32	40.00	-4.68	QP	300	0	
3	238.3102	66.71	-26.77	39.94	47.00	-7.06	peak			
4	356.6757	61.05	-22.31	38.74	47.00	-8.26	peak			
5	397.6333	58.93	-21.49	37.44	47.00	-9.56	peak			
6	833.3170	51.14	-12.95	38.19	47.00	-8.81	peak			

4. HARMONIC CURRENT EMISSION TEST

4.1. Block Diagram of Test Setup

4.1.1. Block diagram of connection between the EUT and simulators

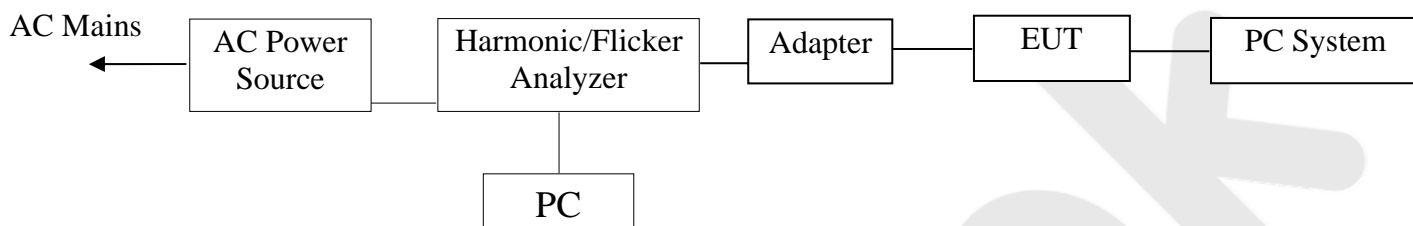

4.2. Measuring Standard

EN 61000-3-2: 2014

4.3. Operation Condition of EUT

4.3.1. Setup the EUT as shown on Section 4.1.

4.3.2. Turn on the Power of all equipments.

4.3.3. After that, let the EUT work and measure it.

4.4. Test Equipment

The following test equipments are used during harmonic current emission measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Programmable AC Power source	SOPH POWER	PAG-1050	630250	Apr. 17, 2016	1 Year
2.	Harmonic and Flicker Analyzer	LAPLACE	AC2000A	272629	Apr. 20, 2016	1 Year

4.5. Measuring Results

PASS

The test dates are shown in the following pages.

HARMONIC CURRENT TEST RESULT SUMMARY (RUN TIME)

Tested On : Jun. 02, 2016 10:46 for 150 Seconds.

Supply Voltage : 229.0 Vrms 324.5 Vpk Frequency : 49.99 to 50.04 Hz

Supply Pass : Harmonic Requirements Frequency Limits.

Load Power : 0.816 W 2.616 VA Power Factor 0.312

Load Current : 11.4 to 11.6 mArms 82.6 to 83.8 mApk Crest Factor: 7.232


Limits Applied : EN61000-3-2:2014 Class A Limits Apply.

Harmonic Number	Limit Current mA	Average (filtered) mA	% Limit	max. Value (Filtered) mA	% Limit	Assessment
8 :	230.0	1.2	0.5	1.23	0.5	Pass
Fundamental :		3.6				
2 :	1080.0	1.4	0.1	1.48	0.1	Pass
3 :	2300.0	3.7	0.2	3.69	0.2	Pass
4 :	430.0	1.3	0.3	1.46	0.3	Pass
5 :	1140.0	3.6	0.3	3.57	0.3	Pass
6 :	300.0	1.3	0.4	1.42	0.5	Pass
7 :	770.0	3.5	0.5	3.46	0.4	Pass
8 :	230.0	1.3	0.6	1.35	0.6	Pass
9 :	400.0	3.3	0.8	3.30	0.8	Pass
10 :	184.0	1.2	0.7	1.28	0.7	Pass
11 :	330.0	3.1	0.9	3.13	0.9	Pass
12 :	153.3	1.1	0.7	1.20	0.8	Pass
13 :	210.0	2.9	1.4	2.93	1.4	Pass
14 :	131.4	1.0	0.8	1.11	0.8	Pass
15 :	150.0	2.7	1.8	2.70	1.8	Pass
16 :	115.0	0.9	0.8	1.01	0.9	Pass
17 :	132.3	2.5	1.9	2.47	1.9	Pass
18 :	102.2	0.8	0.8	0.91	0.9	Pass
19 :	118.4	2.2	1.9	2.23	1.9	Pass
20 :	92.0	0.7	0.8	0.80	0.9	Pass
21 :	107.1	2.0	1.9	1.98	1.8	Pass
22 :	83.6	0.7	0.8	0.71	0.8	Pass
23 :	97.8	1.7	1.7	1.74	1.8	Pass
24 :	76.7	0.6	0.8	0.61	0.8	Pass
25 :	90.0	1.5	1.7	1.51	1.7	Pass
26 :	70.8	0.5	0.7	0.52	0.7	Pass
27 :	83.3	1.3	1.6	1.29	1.5	Pass
28 :	65.7	0.4	0.6	0.44	0.7	Pass
29 :	77.6	1.1	1.4	1.09	1.4	Pass
30 :	61.3	0.3	0.5	0.37	0.6	Pass
31 :	72.6	0.9	1.2	0.90	1.2	Pass
32 :	57.5	0.3	0.5	0.31	0.5	Pass
33 :	68.2	0.7	1.0	0.74	1.1	Pass
34 :	54.1	0.2	0.4	0.26	0.5	Pass
35 :	64.3	0.6	0.9	0.61	0.9	Pass
36 :	51.1	0.2	0.4	0.22	0.4	Pass
37 :	60.8	0.5	0.8	0.49	0.8	Pass
38 :	48.4	0.2	0.4	0.19	0.4	Pass
39 :	57.7	0.4	0.7	0.40	0.7	Pass
40 :	46.0	0.2	0.4	0.16	0.3	Pass
21 - 39 :	251.4	3.8	1.5	3.78	1.5	-

5. VOLTAGE FLUCTUATION AND FLICKER TEST

5.1. Block Diagram of Test Setup

5.1.1. Block diagram of connection between the EUT and simulators

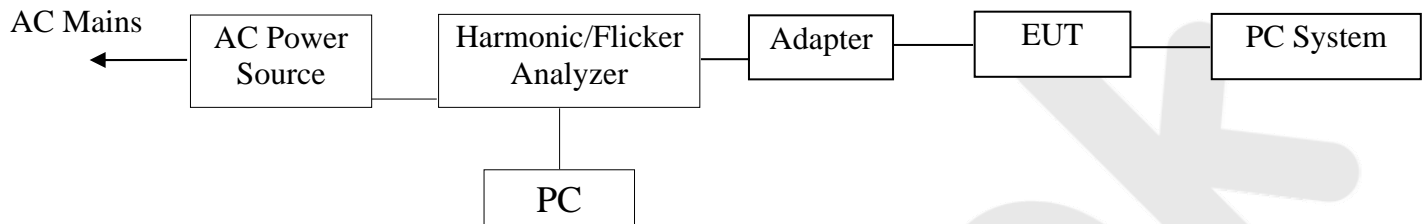

5.2. Measuring Standard

EN 61000-3-3: 2013

5.3. Operation Condition of EUT

5.3.1. Setup the EUT as shown on Section 5.1.

5.3.2. Turn on the Power of all equipments.

5.3.3. After that, let the EUT work and measure it.

5.4. Test Equipment

The following test equipments are used during the voltage fluctuations and flicker measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Programmable AC Power source	SOPH POWER	PAG-1050	630250	Apr. 17, 2016	1 Year
2.	Harmonic and Flicker Analyzer	LAPLACE	AC2000A	272629	Apr. 20, 2016	1 Year

5.5. Measuring Results

PASS

The test dates are shown in the following pages.

Flicker Test Summary per EN/IEC61000-3-3 (Run time)

Tested On : Jun. 02, 2016 10:48 for 600 Seconds.

Supply Voltage : 229.0 Vrms 324.7 Vpk Frequency : 50.00 Hz
Load Current : 11.3 to 11.8 mArms 81.2 to 85.6 mApk Crest Factor: 7.202

Test Method: EN61000-3-3:2013

Voltage Variations :

Highest Level:	-0.23%	
Lowest Level:	-0.65%	
d(max):	0.42%	PASS
Highest d(t) of 500ms:	0.00%	PASS
Present d(t) over 3.33%:	0.00 Seconds	
Longest d(t) over 3.33%:	0.00 Seconds	
Highest Steady State:	-0.43%	
Lowest Steady State:	-0.43%	
Max d(c) Between Adjacent:	0.00%	PASS
Max d(c) Between Any:	0.00%	
Short Term Flicker Pst:	0.58	PASS


Flicker Results :

Pst Classifier	Plt Calculation	
Duration	Flicker	Interval Pst
0.1%	4.13	
0.7%	2.98	
1.0%	2.45	
1.5%	1.89	
2.2%	1.22	
3%	0.80	
4%	0.47	
6%	0.19	
8%	0.11	
10%	0.06	
13%	0.06	
17%	0.06	
30%	0.05	
50%	0.00	
80%	0.00	


6. ELECTROSTATIC DISCHARGE IMMUNITY TEST

6.1. Block Diagram of Test Setup

6.1.1. Block diagram of connection between the EUT and simulators



6.1.2. Block diagram of test setup

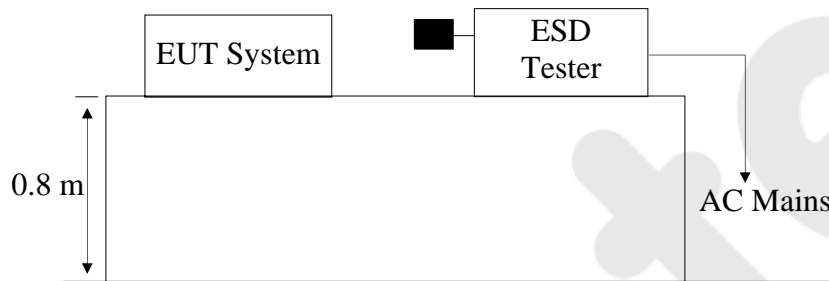

6.2. Measuring Standard

EN 55024: 2010+A1: 2015

IEC 61000-4-2

Severity Level: 3 / Air Discharge: $\pm 8\text{kV}$ Level: 2 / Contact Discharge: $\pm 4\text{kV}$

6.3. Severity Levels and Performance Criterion

6.3.1. Severity level

Level	Test Voltage Contact Discharge (kV)	Test Voltage Air Discharge (kV)
1.	± 2	± 2
2.	± 4	± 4
3.	± 6	± 8
4.	± 8	± 15
X	Special	Special

6.3.2. Performance criterion: **B**

6.4. EUT Configuration

The following equipments are installed on electrostatic discharge immunity

measurement to meet EN 55024 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

6.5. Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 2.5 except the test set up replaced by Section 6.1.

6.6. Test Procedure

6.6.1. Air Discharge:

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 100 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed

6.6.2. Contact Discharge:

All the procedure shall be same as Section 6.6.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

6.6.3. Indirect discharge for horizontal coupling plane

At least 50 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

6.6.4. Indirect discharge for vertical coupling plane

At least 50 single discharge shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

6.7. Test Equipment

The following test equipments are used during the Electrostatic Discharge measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Simulators	3ctest	ESD-30T	ES0131505	June. 25, 2016	1 Year

6.8. Measuring Results

PASS

Please refer to the following pages

Electrostatic Discharge Test Results

Shenzhen Anbotech Compliance Laboratory Limited

Test Mode	: On	Temperature	: 25°C
Air discharge	: ±8.0kV	Humidity	: 54%
Contact discharge:	±4.0kV	Criterion required	: B
Power Supply :	DC 5V via adapter AC 230V, 50Hz	Number of discharge	: 10
Test Result: <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail			
Location		Kind A-Air Discharge C-Contact Discharge	Result
Slot of the EUT	10 points	A	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
Others	10 points	A	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
HCP	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of front	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of rear	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of left	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
VCP of right	4 points	C	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
Note:			


7. RF FIELD STRENGTH SUSCEPTIBILITY TEST

7.1. Block Diagram of Test

7.1.1. Block diagram of connection between the EUT and simulators



7.1.2. Block diagram of RS test setup

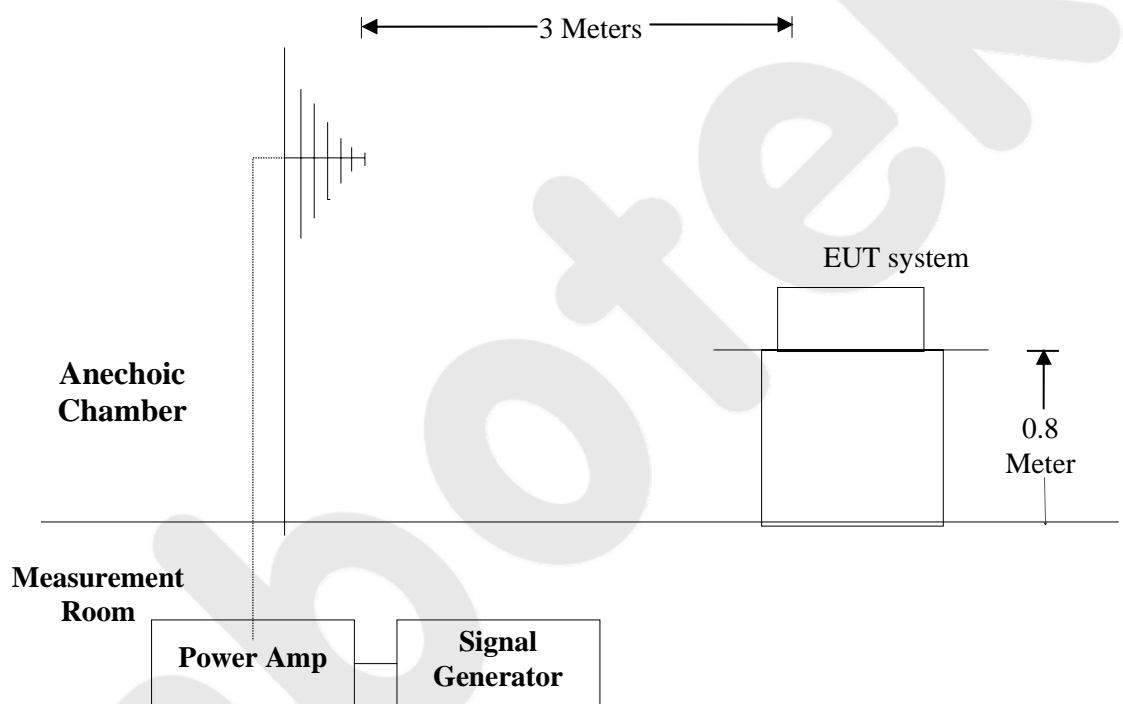

7.2. Measuring Standard

EN 55024: 2010+A1: 2015

IEC 61000-4-3

Severity Level: 2, 3V / m

7.3. Severity Levels and Performance Criterion

7.3.1. Severity Levels

Level	Field Strength V/m
1.	1
2.	3
3.	10
X	Special

7.3.2. Performance Criterion: A

7.4. EUT Configuration on Test

The following equipments are installed on RF Field Strength susceptibility Measurement to meet EN 55024 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

7.5. Operating Condition of EUT

Same as conducted emission measurement which is listed in Section 2.5. except the test setup replaced as Section 7.1.

7.6. Test Procedure

The EUT are placed on a table which is 0.8 meter high above the ground. The EUT is set 3 meters away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of the EUT must be faced this transmitting antenna and measured individually.

In order to judge the EUT performance, a CCD camera is used to monitor its screen. All the scanning conditions are as following:

Condition of Test	Remark
1. Fielded Strength	3V/m (Severity Level 2)
2. Radiated Signal	Unmodulated
3. Scanning Frequency	80-1000MHz
4. Sweep time of radiated	0.0015 Decade/s
2. Dwell Time	1 Sec.

7.7. Test Equipment

The following test equipments are used during the R/S (Shenzhen EMTEK) measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	RF Power Meter. Dual Channel	BOONTON	4232A	10539	May 29, 2016	1 year
2.	50ohm Diode Power Sensor	BOONTON	51011EMC	34236/34238	May 29, 2016	1 year
3.	Broad-Band Horn Antenna	SCHWARZBECK	BBHA9120 L3F	332	May 29, 2016	1 year
4.	Power Amplifier	PRANA	AP32MT215	N/A	May 29, 2016	1 year
5.	Power Amplifier	MILMEGA	AS0102-55	N/A	May 29, 2016	1 year
6.	Signal Generator	AEROFLEX	2023B	N/A	May 29, 2016	1 year
7.	Field Strength Meter	HOLADAY	HI-6005	N/A	May 29, 2016	1 year
8.	RS232 Fiber Optic Modem	HOLADAY	HI-4413P	N/A	May 29, 2016	1 year
9.	Log.-Per. Antenna	SCHWARZBECK	VULP 9118E	N/A	May 29, 2016	1 year

7.8. Measuring Results

PASS.

Please refer to the following page.

RF Field Strength Susceptibility Test Results

Shenzhen Anbotek Compliance Laboratory Limited

Test Mode :	On	Temperature :	25°C
Field Strength:	3 V/m	Humidity :	54%
Criterion required :	A	Frequency Range:	80 MHz to 1000 MHz
Power Supply :	DC 5V via adapter AC 230V, 50Hz	Test Result :	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Modulation:	<input type="checkbox"/> None	<input type="checkbox"/> Pulse	<input checked="" type="checkbox"/> AM 1KHz 80%
	Frequency Rang : 80~ 1000MHz		Result
Steps	#	%	
	Horizontal	Vertical	
Front	3 V/m	3 V/m	
Right	3 V/m	3 V/m	
Rear	3 V/m	3 V/m	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
Left	3 V/m	3 V/m	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D

Note: The Project was tested in Shenzhen EMTEK Co., Ltd.


8. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

8.1. Block Diagram of Test Setup

8.1.1. Block diagram of connection between the EUT and simulators



8.1.2. EFT Test Setup

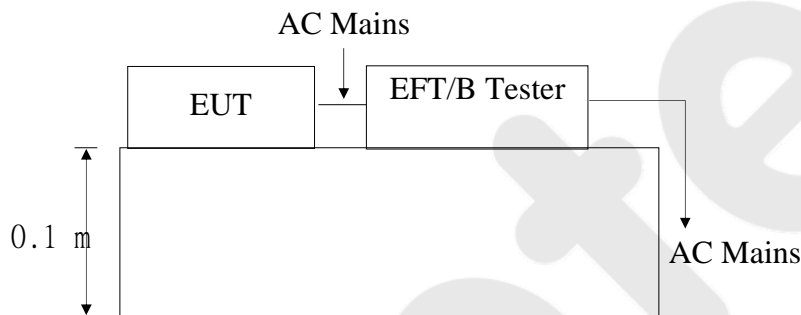

8.2. Measuring Standard

EN 55024: 2010+A1: 2015
IEC 61000-4-4
Severity Level, Level 2: 1kV

8.3. Severity Levels and Performance Criterion

8.3.1. Severity level

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1.	0.5 kV	0.25 kV
2.	1 kV	0.5 kV
3.	2 kV	1 kV
4.	4 kV	2 kV
X	Special	Special

8.3.2. Performance criterion: **B**

8.4. EUT Configuration

The following equipments are installed on electrical fast transient/burst immunity

measurement to meet EN 55024 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

8.5. Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 2.5, except the test set up replaced by Section 8.1.

8.6. Test Procedure

The EUT is put on the table which is 0.1 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

8.6.1. For input and output AC Power ports:

The EUT is connected to the Power mains by using a coupling device which couples the EFT interference signal to AC Power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

8.6.2. For signal lines and control lines ports:

No I/O ports. It's unnecessary to test.

8.6.3. For DC output line ports:

It's unnecessary to test.

8.7. Test Equipment

The following test equipments are used during the Electrical Fast Transient /Burst Immunity measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EFT Burst Simulator	PRIMA	EFT61004B	PR10114282	Apr. 17, 2016	1 Year

8.8. Measuring Results

PASS.

Please refer to the following page.

Electrical Fast Transient/Burst Test Results

Shenzhen Anbotek Compliance Laboratory Limited

Operation Mode: On		Criterion required : B	
Power Supply : DC 5V via adapter AC 230V, 50Hz		Test Result : <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Ambient Condition :		24°C	55% RH
Inject Line : AC Mains	Inject Method: Direct		Inject Time(s): 120
Line	Polarity	Test Voltage	Result
L	±	1kV	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
N	±	1kV	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
PE			
L 、 N	±	1kV	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
L 、 PE			
N 、 PE			
L 、 N 、 PE			
Signal Line			
DC Line			
Note :			
Remark:			


9. SURGE IMMUNITY TEST

9.1. Block Diagram of Test Setup

9.1.1. Block diagram of connection between the EUT and simulators



9.1.2. Surge Test Setup

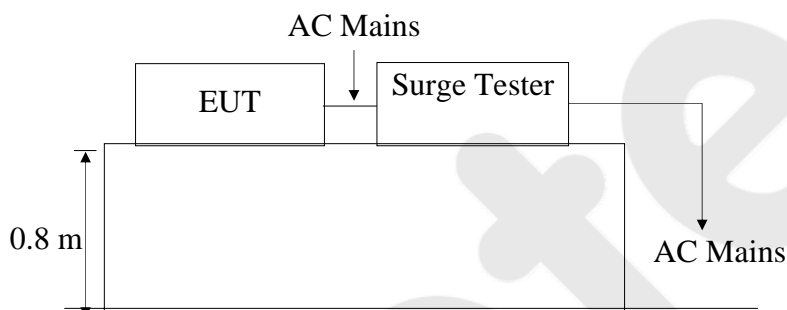

9.2. Measuring Standard

EN 55024: 2010+A1: 2015

IEC 61000-4-5

Severity Level: Level 2, Line to Line: 1.0kV

9.3. Severity Levels and Performance Criterion

9.3.1. Severity level

Severity Level	Open-Circuit Test Voltage kV
1	0.5
2	1.0
3	2.0
4	4.0
*	Special

9.3.2. Performance criterion: **B**

9.4. EUT Configuration

The following equipments are installed on surge immunity measurement to meet EN 55024 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

9.5. Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 2.5, except the test set up replaced by Section 9.1.1.

9.6. Test Procedure

- 1) Set up the EUT and test generator as shown on Section 9.1.2.
- 2) For line to line coupling mode, provide a 1.0 kV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.
- 3) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 4) Different phase angles are done individually.
- 5) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

9.7. Test Equipment

The following test equipments are used during the Surge Immunity measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	6kV Surge Generator	EMPEK	LSG-5060G	06010017N	Apr. 17, 2016	1 Year
2.	CDN	EMPEK	CDN-5110G	06110005N	Apr. 17, 2016	1 Year

9.8. Measuring Results

PASS.

Please refer to the following page.

Surge Immunity Test Results

Shenzhen Anbotek Compliance Laboratory Limited

Test Mode: On			Temperature: 24°C		
Humidity: 55%			Criterion required: B		
Power Supply : DC 5V via adapter AC 230V, 50Hz			Test Result : <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		
Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (kV)	Result
L-N	±	<input checked="" type="checkbox"/> 0° <input checked="" type="checkbox"/> 90° <input checked="" type="checkbox"/> 180° <input checked="" type="checkbox"/> 270°	5	1.0	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
L-PE					
N-PE					
Remark:					


10. INJECTED CURRENTS SUSCEPTIBILITY TEST

10.1. Block Diagram of Test Setup

10.1.1. Block diagram of connection between the EUT and simulators



10.1.2. Block Diagram of Test Setup

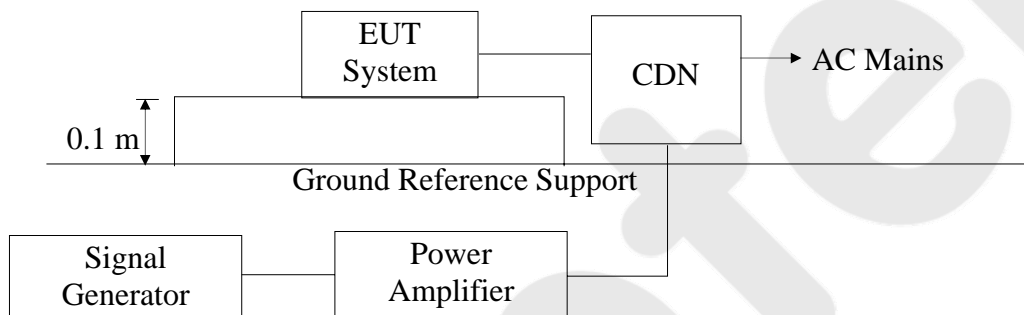

10.2. Measuring Standard

EN 55024: 2010+A1: 2015

IEC 61000-4-6, Severity Level 2: 3V (rms), (0.15MHz ~ 80MHz)

10.3. Severity Levels and Performance Criterion

10.3.1. Severity level

Level	Field Strength V(rms)
1.	1
2.	3
3.	10
X	Special

10.3.2. Performance criterion: A

10.4. EUT Configuration

The following equipments are installed on currents susceptibility measurement to meet EN 55024 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

10.5. Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 2.5, except the test set up replaced by Section 10.1.

10.6. Test Procedure

10.6.1. For AC Mains

- 1) Set up the EUT, CDN and test generators as shown on Section 10.1.2.
- 2) Let the EUT work in test mode and measure it.
- 3) The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 4) The disturbance signal described below is injected to EUT through CDN.
- 5) The EUT operates within its operational mode(s) under intended climatic conditions after Power on.
- 6) The frequency range is swept from 150KHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave.
- 7) The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 8) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

10.6.2. For signal lines and control lines ports:

No I/O ports. It's unnecessary to test.

10.6.3. For DC output line ports:

It's unnecessary to test.

10.7. Test Equipment

The following test equipments are used during the Injected Current Susceptibility measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	C/S Conducted Immunity Test System	FRANKONIA	CIT-10	126A1196/2012	Apr. 17, 2016	1 Year
2.	CDN	FRANKONIA	CDN - M2+ M3	A2210178/2012	Apr. 17, 2016	1 Year
3.	6dB attenuator	FRANKONIA	DAM 26W	1172202	Apr. 17, 2016	1 Year

10.8. Measuring Results

PASS.

Please refer to the following page.

Injected Currents Susceptibility Test Results


Shenzhen Anbotek Compliance Laboratory Limited

Test Mode : On		Temperature : 24℃	
Power Supply : DC 5V via adapter AC 230V, 50Hz		Humidity : 53%	
Criterion required: A		Test Result : <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Result
0.15 ~ 80	AC Mains	3V	<input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D
Test Mode :			
Frequency Range (MHz)	Injected Position	Strength (Unmodulated)	Result
Remark :		Note:	


11. VOLTAGE DIPS AND INTERRUPTIONS TEST

11.1. Block Diagram of Test Setup

11.1.1. Block diagram of connection between the EUT and simulators



11.1.2. Dips Test Setup

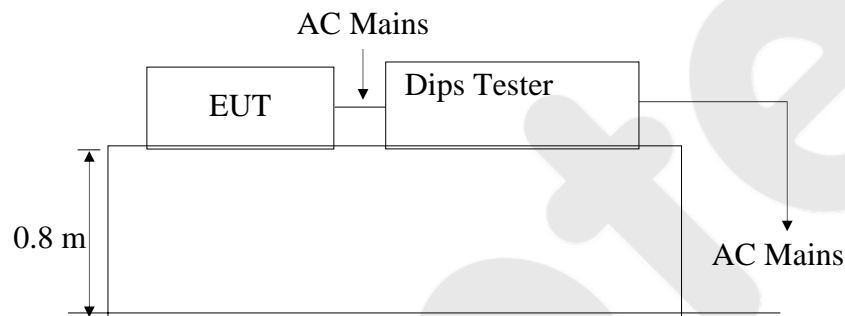

11.2. Measuring Standard

EN 55024: 2010+A1: 2015
IEC 61000-4-11

11.3. Severity Levels and Performance Criterion

11.3.1. Severity level

Test Level $\%U_T$	Voltage dip and short interruptions $\%U_T$	Duration (in period)
0	100	0.5
		1
40	60	5
		10
70	30	25
		50
0	100	*

11.3.2. Performance criterion: **B&C**

11.4. EUT Configuration

The following equipments are installed on voltage dips and interruptions measurement to meet EN 55024 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

11.5. Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 2.5, except the test set up replaced by Section 11.1.

11.6. Test Procedure

- 1) Set up the EUT and test generator as shown on Section 11.1.2.
- 2) The interruptions is introduced at selected phase angles with specified duration.
- 3) Record any degradation of performance.

11.7. Test Equipment

The following test equipments are used during the Dips Immunity measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	CYCLE SAG Simulator	PRIMA	DRP61011AG	PR12046234	Apr. 17, 2016	1 Year

11.8. Measuring Results

PASS.

Please refer to the following page.

Voltage Dips and Interruptions Test Results

Shenzhen Anbotek Compliance Laboratory Limited


Test Mode	:	On	Temperature	:	24℃	Humidity	:	55%
Power Supply : DC 5V via adapter AC 230V, 50Hz					Criterion required : A			
Test Result : <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail								
Test Level % U _T	Voltage Dips & Short Interruptions % U _T		Duration (in periods)		Result			
0	100		0.5P		<input type="checkbox"/> A <input checked="" type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D			
70	30		25P		<input type="checkbox"/> A <input checked="" type="checkbox"/> B <input type="checkbox"/> C <input type="checkbox"/> D			
Test Mode :								
Test Level % U _T	Voltage Dips & Short Interruptions % U _T		Duration (in periods)		Result			
0	100		250P		<input type="checkbox"/> A <input type="checkbox"/> B <input checked="" type="checkbox"/> C <input type="checkbox"/> D			
Remark:								

12. PHOTOGRAPHS

12.1. Photo of Power Line Conducted Emission Test



12.2. Photo of Radiated Emission Test

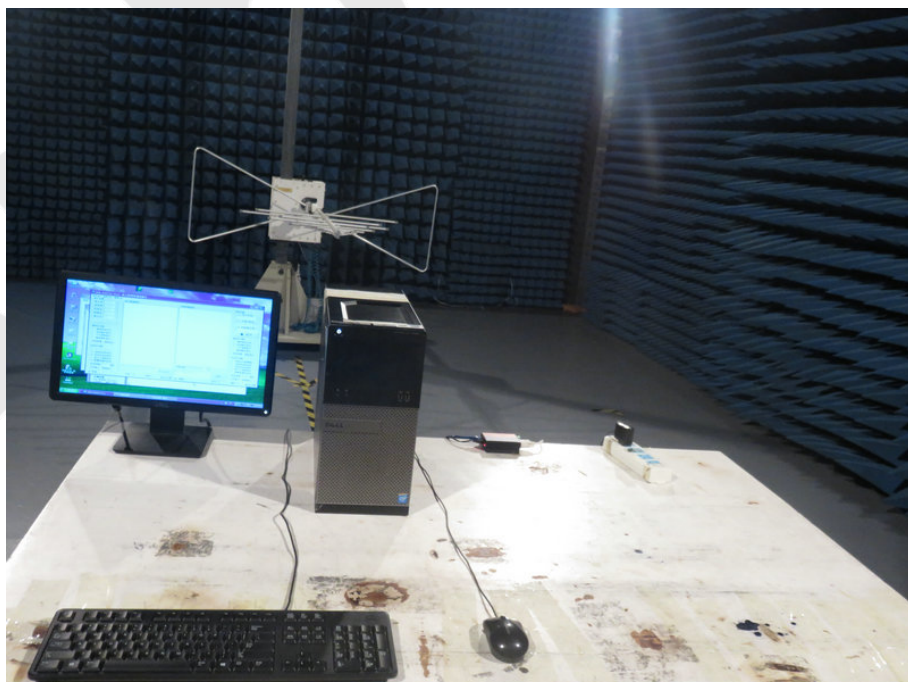


12.3. Photo of Flicker/Harmonic Test



12.4. Photo of Electrostatic Discharge Test



12.5. Photo of RF Field Strength susceptibility Test

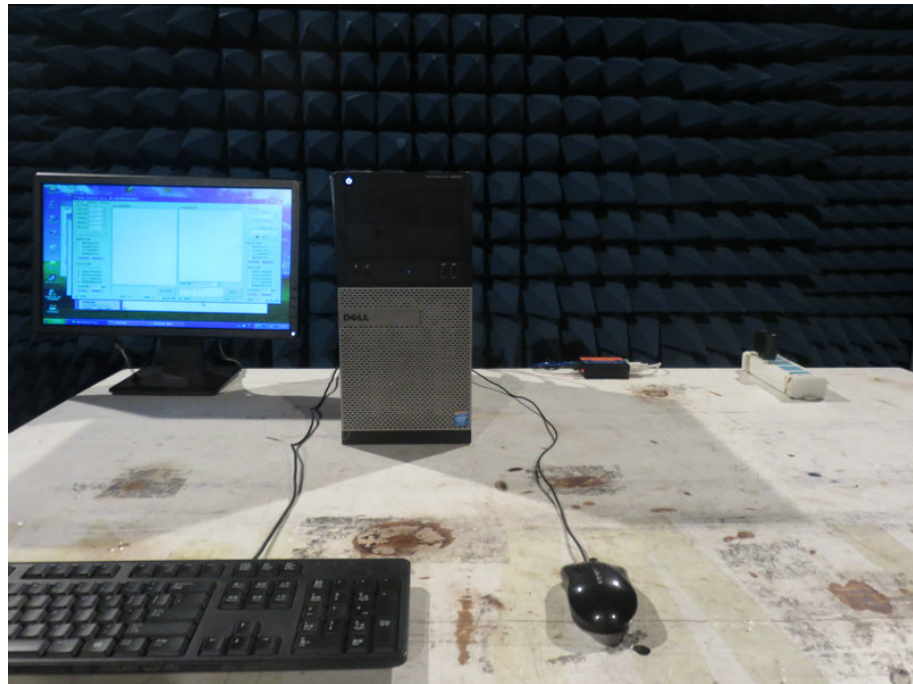

12.6. Photo of Electrical Fast Transient/Burst Immunity Test



12.7. Photo of Surge Immunity Test



12.8. Photo of Injected Currents Susceptibility Test



12.9. Photo of Voltage dips and interruptions Test



APPENDIX I (Photos of EUT)

Figure 1
The EUT-Front View

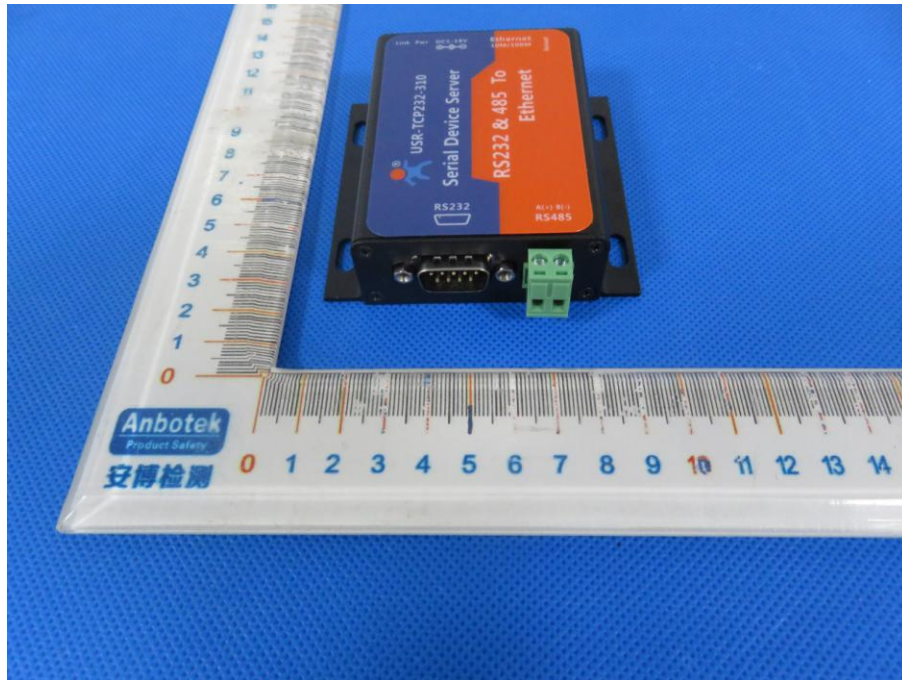


Figure 2
The EUT-Back View

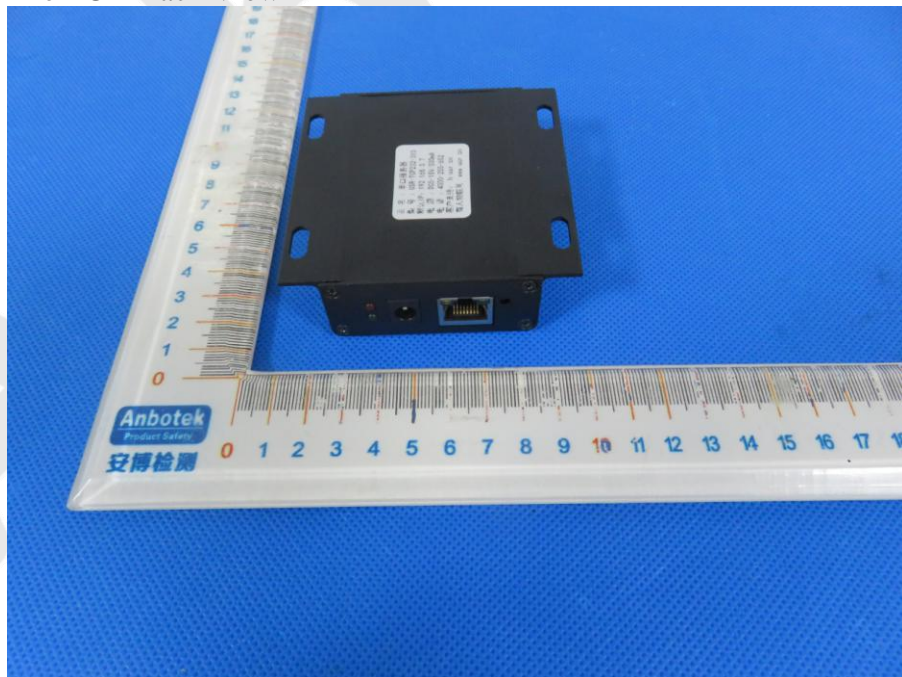


Figure 3
The EUT-Side View



Figure 4
The EUT-Inside View



Figure 5
PCB of The EUT-Front View


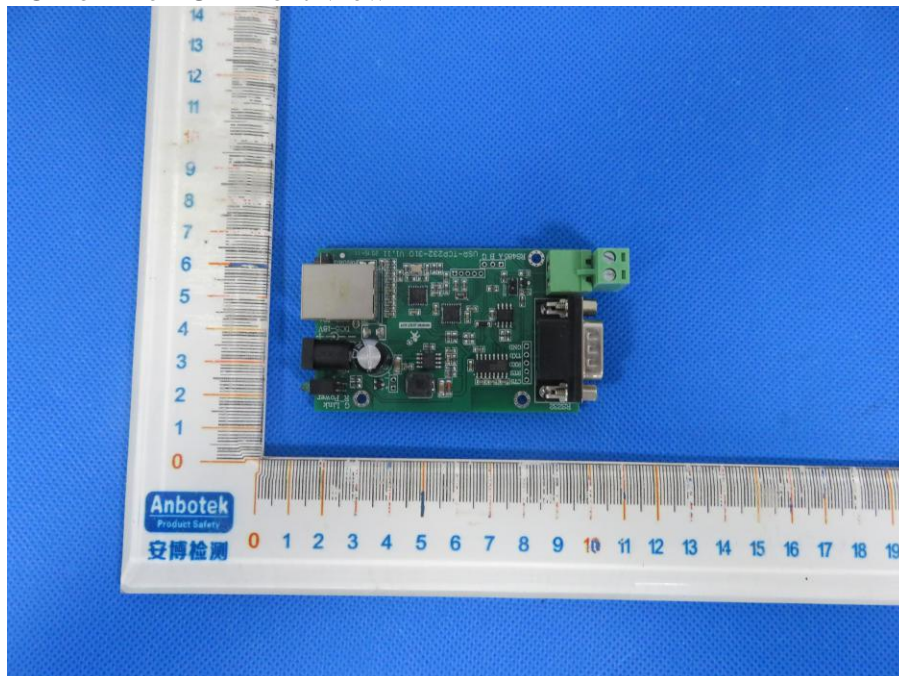


Figure 6
PCB of The EUT-Back View

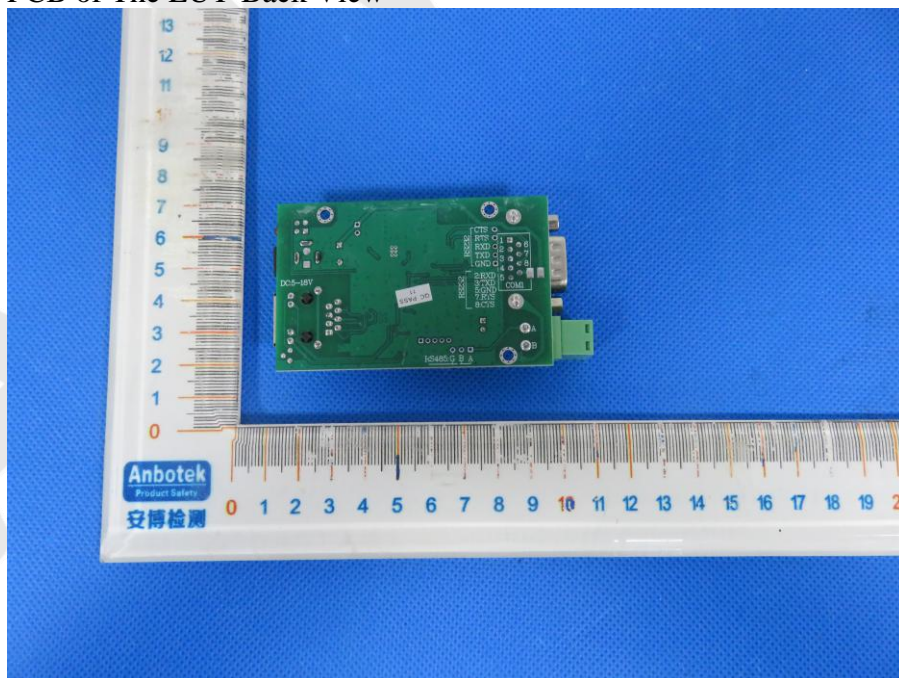

CE Label

1. The CE conformity marking must consist of the initials 'CE' taking the following form:
If the CE marking is reduced or enlarged, the proportions given in the above graduated drawing must be respected.
2. The CE marking must have a height of at least 5 mm except where this is not possible on account of the nature of the apparatus.
3. The CE marking must be affixed to the product or to its data plate. Additionally it must be affixed to the packaging, if any, and to the accompanying documents.
4. The CE marking must be affixed visibly, legibly and indelibly.
It must have the same height as the initials 'CE'.

Anbotek